

**YE-K2 20 EUROPE**



**YIG**

**K-2 CARBIDE END MILLS**

**TiAlN-COATED SOLID CARBIDE END MILLS**

General Purpose  
Conventional / High Speed Milling  
Wet / Dry Cutting

# SELECTION GUIDE

Please visit  
[global.yg1.com/mat](http://global.yg1.com/mat)  
 for material search


SERIES	G9624	G9A70	G9437	G9438
FLUTE	2	2	2	2
HELIX ANGLE	30°	30°	≈ 30°	≈ 30°
CUTTING EDGE SHAPE	BALL NOSE	BALL NOSE	BALL NOSE	BALL NOSE
SIZE MIN	R1.0	R0.5	R1.0	R1.0
SIZE MAX	R10.0	R10.0	R10.0	R10.0
PAGE	8	9	10	11

## K-2 CARBIDE END MILLS

TiAlN-COATED SOLID CARBIDE END MILLS  
 General Purpose  
 Conventional / High Speed Milling  
 Wet / Dry Cutting

◎ : Excellent ○ : Good

ISO	VDI 3323	Material Description	Composition / Structure / Heat Treatment	HB	HRc	SHORT LENGTH	SHORT LENGTH	SHORT LENGTH	LONG LENGTH
P	1	Non-alloy steel	About 0.15% C Annealed	125		◎	◎	◎	◎
	2		About 0.45% C Annealed	190	13	◎	◎	◎	◎
	3		About 0.45% C Quenched & tempered	250	25	◎	◎	◎	◎
	4		About 0.75% C Annealed	270	28	◎	◎	◎	◎
	5		About 0.75% C Quenched & tempered	300	32	◎	◎	◎	◎
	6	Low alloy steel	Annealed	180	10	◎	◎	◎	◎
	7		Quenched & tempered	275	29	◎	◎	◎	◎
	8		Quenched & tempered	300	32	◎	◎	◎	◎
	9		Quenched & tempered	350	38	◎	◎	◎	◎
	10	High alloyed steel, and tool steel	Annealed	200	15	◎	◎	◎	◎
	11		Quenched & Tempered	325	35	◎	◎	◎	◎
M	12	Stainless steel	Ferritic / Martensitic Annealed	200	15	○	○	○	○
	13		Martensitic Quenched & Tempered	240	23	○	○	○	○
	14		Austenitic	180	10	○	○	○	○
K	15	Grey cast iron	Pearlitic / ferritic	180	10	○	○	○	○
	16		Pearlitic (Martensitic)	260	26	○	○	○	○
	17	Nodular cast iron	Ferritic	160	3	○	○	○	○
	18		Pearlitic	250	25	○	○	○	○
	19	Malleable cast iron	Ferritic	130		○	○	○	○
20	Pearlitic		230	21	○	○	○	○	
N	21	Aluminum-wrought alloy	Not Curable	60		○	○	○	○
	22		Curable Hardened	100		○	○	○	○
	23	Aluminum-cast, alloyed	≤ 12% Si, Not Curable	75		○	○	○	○
	24		≤ 12% Si, Curable Hardened	90		○	○	○	○
	25		> 12% Si, Not Curable	130		○	○	○	○
	26	Copper and Copper Alloys (Bronze / Brass)	Cutting Alloys, PB>1%	110		○	○	○	○
	27		CuZn, CuSnZn (Brass)	90		○	○	○	○
	28		CuSn, lead-free copper and electrolytic copper	100		○	○	○	○
	29	Non Metallic Materials	Duroplastic, Fiber Reinforced Plastic						
	30		Rubber, Wood, etc.						
S	31	Heat Resistant Super Alloys	Fe Based Annealed	200	15	○	○	○	○
	32		Fe Based Cured	280	30	○	○	○	○
	33		Ni or Co Based Annealed	250	25	○	○	○	○
	34		Ni or Co Based Cured	350	38	○	○	○	○
	35		Ni or Co Based Cast	320	34	○	○	○	○
	36	Titanium Alloys	Pure Titanium	400 Rm		○	○	○	○
	37		Alpha + Beta Alloys Hardened	1050 Rm		○	○	○	○
H	38	Hardened steel	Hardened	550	55				
	39		Hardened	630	60				
	40	Chilled Cast Iron	Cast	400	42	○	○	○	○
	41	Hardened Cast Iron	Hardened	550	55				

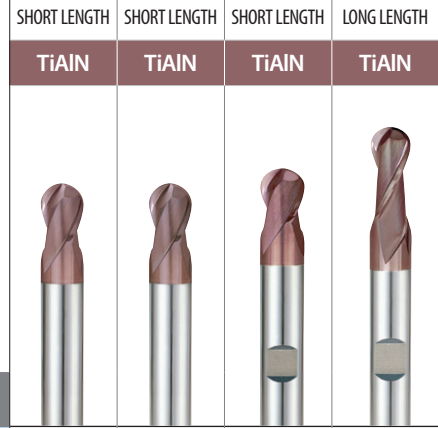

G9454	G9455	G9B81	G9634	G9B82	G9B83	G9B84	G9B85	G9424	G9G44	G9A68
2	2	2	4	2	2	4	4	2	2	2
30°	30°	30°	30°	30°	30°	30°	30°	30°	30°	30°
BALL NOSE	BALL NOSE	BALL NOSE	BALL NOSE	CORNER RADIUS	CORNER RADIUS	CORNER RADIUS	CORNER RADIUS	SQUARE	SQUARE	SQUARE
R1.5	R1.5	R0.2	R1.0	D2.0	D3.0	D2.0	D3.0	D1.0	D3.0	D1.0
R10.0	R10.0	R2.0	R10.0	D12.0	D12.0	D12.0	D12.0	D20.0	D20.0	D20.0
12	13	14	16	17	19	20	22	23	24	25
LONG REACH	EXTRA LONG LENGTH	RIB PROCESSING	SHORT LENGTH	SHORT LENGTH	LONG REACH	SHORT LENGTH	LONG REACH	SHORT LENGTH	SHORT LENGTH WITH CHAMFER	SHORT LENGTH
TiAIN	TiAIN	TiAIN	TiAIN	TiAIN	TiAIN	TiAIN	TiAIN	TiAIN	TiAIN	TiAIN

○	○	○	○	○	○	○	○	○	○	○	1
○	○	○	○	○	○	○	○	○	○	○	2
○	○	○	○	○	○	○	○	○	○	○	3
○	○	○	○	○	○	○	○	○	○	○	4
○	○	○	○	○	○	○	○	○	○	○	5
○	○	○	○	○	○	○	○	○	○	○	6
○	○	○	○	○	○	○	○	○	○	○	7
○	○	○	○	○	○	○	○	○	○	○	8
○	○	○	○	○	○	○	○	○	○	○	9
○	○	○	○	○	○	○	○	○	○	○	10
○	○	○	○	○	○	○	○	○	○	○	11
○	○	○	○	○	○	○	○	○	○	○	12
○	○	○	○	○	○	○	○	○	○	○	13
○	○	○	○	○	○	○	○	○	○	○	14
○	○	○	○	○	○	○	○	○	○	○	15
○	○	○	○	○	○	○	○	○	○	○	16
○	○	○	○	○	○	○	○	○	○	○	17
○	○	○	○	○	○	○	○	○	○	○	18
○	○	○	○	○	○	○	○	○	○	○	19
○	○	○	○	○	○	○	○	○	○	○	20
○	○	○	○	○	○	○	○	○	○	○	21
○	○	○	○	○	○	○	○	○	○	○	22
○	○	○	○	○	○	○	○	○	○	○	23
○	○	○	○	○	○	○	○	○	○	○	24
○	○	○	○	○	○	○	○	○	○	○	25
○	○	○	○	○	○	○	○	○	○	○	26
○	○	○	○	○	○	○	○	○	○	○	27
○	○	○	○	○	○	○	○	○	○	○	28
○	○	○	○	○	○	○	○	○	○	○	29
○	○	○	○	○	○	○	○	○	○	○	30
○	○	○	○	○	○	○	○	○	○	○	31
○	○	○	○	○	○	○	○	○	○	○	32
○	○	○	○	○	○	○	○	○	○	○	33
○	○	○	○	○	○	○	○	○	○	○	34
○	○	○	○	○	○	○	○	○	○	○	35
○	○	○	○	○	○	○	○	○	○	○	36
○	○	○	○	○	○	○	○	○	○	○	37
											38
											39
○	○	○	○	○	○	○	○	○	○	○	40
											41

# SELECTION GUIDE

Please visit  
[globalyg1.com/mat](http://globalyg1.com/mat)  
 for material search


SERIES	G9444	G9527	G9445	G9G45
FLUTE	2	2	2	2
HELIX ANGLE	≈ 30°	≈ 30°	≈ 30°	≈ 30°
CUTTING EDGE SHAPE	SQUARE	SQUARE	SQUARE	SQUARE
SIZE MIN	D2.0	D3.5	D2.0	D3.0
SIZE MAX	D20.0	D20.0	D20.0	D20.0
PAGE	26	27	28	30

## K-2 CARBIDE END MILLS







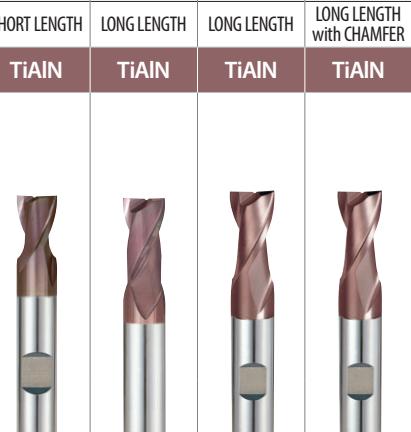




TiAIN-COATED SOLID CARBIDE END MILLS  
 General Purpose  
 Conventional / High Speed Milling  
 Wet / Dry Cutting

◎ : Excellent ○ : Good

ISO	VDI 3323	Material Description	Composition / Structure / Heat Treatment	HB	HRc	SHORT LENGTH	LONG LENGTH	LONG LENGTH	LONG LENGTH with CHAMFER
P	1	Non-alloy steel	About 0.15% C Annealed	125		◎	◎	◎	◎
	2		About 0.45% C Annealed	190	13	◎	◎	◎	◎
	3		About 0.45% C Quenched & tempered	250	25	◎	◎	◎	◎
	4		About 0.75% C Annealed	270	28	◎	◎	◎	◎
	5		About 0.75% C Quenched & tempered	300	32	◎	◎	◎	◎
	6	Low alloy steel	Annealed	180	10	◎	◎	◎	◎
	7		Quenched & tempered	275	29	◎	◎	◎	◎
	8		Quenched & tempered	300	32	◎	◎	◎	◎
	9		Quenched & tempered	350	38	◎	◎	◎	◎
	10	High alloyed steel, and tool steel	Annealed	200	15	◎	◎	◎	◎
	11		Quenched & Tempered	325	35	◎	◎	◎	◎
M	12	Stainless steel	Ferritic / Martensitic Annealed	200	15	○	○	○	○
	13		Martensitic Quenched & Tempered	240	23	○	○	○	○
	14		Austenitic	180	10	○	○	○	○
K	15	Grey cast iron	Pearlitic / ferritic	180	10	○	○	○	○
	16		Pearlitic (Martensitic)	260	26	○	○	○	○
	17	Nodular cast iron	Ferritic	160	3	○	○	○	○
	18		Pearlitic	250	25	○	○	○	○
	19	Malleable cast iron	Ferritic	130		○	○	○	○
20	Pearlitic		230	21	○	○	○	○	
N	21	Aluminum-wrought alloy	Not Curable	60		○	○	○	○
	22		Curable Hardened	100		○	○	○	○
	23	Aluminum-cast, alloyed	≤ 12% Si, Not Curable	75		○	○	○	○
	24		≤ 12% Si, Curable Hardened	90		○	○	○	○
	25		> 12% Si, Not Curable	130		○	○	○	○
	26	Copper and Copper Alloys (Bronze / Brass)	Cutting Alloys, PB>1%	110		○	○	○	○
	27		CuZn, CuSnZn (Brass)	90		○	○	○	○
	28		CuSn, lead-free copper and electrolytic copper	100		○	○	○	○
	29	Non Metallic Materials	Duroplastic, Fiber Reinforced Plastic			○	○	○	○
	30		Rubber, Wood, etc.						
S	31	Heat Resistant Super Alloys	Fe Based Annealed	200	15	○	○	○	○
	32		Fe Based Cured	280	30	○	○	○	○
	33		Ni or Co Based Annealed	250	25	○	○	○	○
	34		Ni or Co Based Cured	350	38	○	○	○	○
	35	Titanium Alloys	Cast	320	34	○	○	○	○
	36	Pure Titanium		400 Rm		○	○	○	○
	37	Alpha + Beta Alloys Hardened		1050 Rm		○	○	○	○
H	38	Hardened steel	Hardened	550	55				
	39		Hardened	630	60				
	40	Chilled Cast Iron	Cast	400	42	○	○	○	○
	41	Hardened Cast Iron	Hardened	550	55				



G9452	G9B80	G9553 G9410	G9G46	G9425	G9G47	G9439	G9528	G9433	G9G48	G9447
2	2	3	3	3	3	3	3	3	3	3
30°	30°	30°	30°	30°	30°	≈ 30°	≈ 30°	≈ 30°	≈ 30°	45°
SQUARE	SQUARE	SQUARE	SQUARE	SQUARE	SQUARE	SQUARE	SQUARE	SQUARE	SQUARE	SQUARE
D3.0	D0.4	D0.5	D3.0	D1.0	D3.0	D2.0	D3.5	D3.0	D3.0	D3.0
D20.0	D4.0	D20.0	D20.0	D20.0	D20.0	D20.0	D20.0	D20.0	D20.0	D20.0
31	32	35	37	38	39	40	41	42	43	44
EXTRA LONG LENGTH	RIB PROCESSING	THROW AWAY	THROW AWAY with CHAMFER	SHORT LENGTH	SHORT LENGTH with CHAMFER	SHORT LENGTH	LONG LENGTH	LONG LENGTH	LONG LENGTH with CHAMFER	LONG LENGTH
TiAIN	TiAIN	TiAIN	TiAIN	TiAIN	TiAIN	TiAIN	TiAIN	TiAIN	TiAIN	TiAIN

											
○	○	○	○	○	○	○	○	○	○	○	1
○	○	○	○	○	○	○	○	○	○	○	2
○	○	○	○	○	○	○	○	○	○	○	3
○	○	○	○	○	○	○	○	○	○	○	4
○	○	○	○	○	○	○	○	○	○	○	5
○	○	○	○	○	○	○	○	○	○	○	6
○	○	○	○	○	○	○	○	○	○	○	7
○	○	○	○	○	○	○	○	○	○	○	8
○	○	○	○	○	○	○	○	○	○	○	9
○	○	○	○	○	○	○	○	○	○	○	10
○	○	○	○	○	○	○	○	○	○	○	11
○	○	○	○	○	○	○	○	○	○	○	12
○	○	○	○	○	○	○	○	○	○	○	13
○	○	○	○	○	○	○	○	○	○	○	14
○	○	○	○	○	○	○	○	○	○	○	15
○	○	○	○	○	○	○	○	○	○	○	16
○	○	○	○	○	○	○	○	○	○	○	17
○	○	○	○	○	○	○	○	○	○	○	18
○	○	○	○	○	○	○	○	○	○	○	19
○	○	○	○	○	○	○	○	○	○	○	20
○	○	○	○	○	○	○	○	○	○	○	21
○	○	○	○	○	○	○	○	○	○	○	22
○	○	○	○	○	○	○	○	○	○	○	23
○	○	○	○	○	○	○	○	○	○	○	24
○	○	○	○	○	○	○	○	○	○	○	25
○	○	○	○	○	○	○	○	○	○	○	26
○	○	○	○	○	○	○	○	○	○	○	27
○	○	○	○	○	○	○	○	○	○	○	28
○	○	○	○	○	○	○	○	○	○	○	29
○	○	○	○	○	○	○	○	○	○	○	30
○	○	○	○	○	○	○	○	○	○	○	31
○	○	○	○	○	○	○	○	○	○	○	32
○	○	○	○	○	○	○	○	○	○	○	33
○	○	○	○	○	○	○	○	○	○	○	34
○	○	○	○	○	○	○	○	○	○	○	35
○	○	○	○	○	○	○	○	○	○	○	36
○	○	○	○	○	○	○	○	○	○	○	37
○	○	○	○	○	○	○	○	○	○	○	38
○	○	○	○	○	○	○	○	○	○	○	39
○	○	○	○	○	○	○	○	○	○	○	40
○	○	○	○	○	○	○	○	○	○	○	41

# SELECTION GUIDE

Please visit  
[globalyg1.com/mat](http://globalyg1.com/mat)  
 for material search


SERIES	G9G49	G9432	G9G50
FLUTE	3	4	4
HELIX ANGLE	45°	30°	30°
CUTTING EDGE SHAPE	SQUARE	SQUARE	SQUARE
SIZE MIN	D3.0	D1.0	D3.0
SIZE MAX	D20.0	D20.0	D20.0
PAGE	45	46	47

## K-2 CARBIDE END MILLS







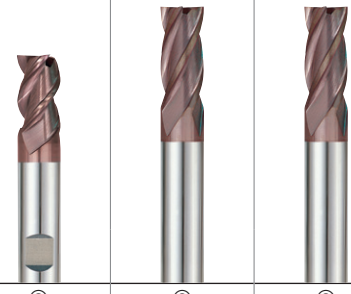


TiAIN-COATED SOLID CARBIDE END MILLS  
 General Purpose  
 Conventional / High Speed Milling  
 Wet / Dry Cutting

◎ : Excellent ○ : Good

ISO	VDI 3323	Material Description	Composition / Structure / Heat Treatment	HB	HRc	LONG LENGTH with CHAMFER	SHORT LENGTH	SHORT LENGTH with CHAMFER
P	1	Non-alloy steel	About 0.15% C Annealed	125		◎	◎	◎
	2		About 0.45% C Annealed	190	13	◎	◎	◎
	3		About 0.45% C Quenched & tempered	250	25	◎	◎	◎
	4		About 0.75% C Annealed	270	28	◎	◎	◎
	5		About 0.75% C Quenched & tempered	300	32	◎	◎	◎
	6	Low alloy steel	Annealed	180	10	◎	◎	◎
	7		Quenched & tempered	275	29	◎	◎	◎
	8		Quenched & tempered	300	32	◎	◎	◎
	9		Quenched & tempered	350	38	◎	◎	◎
	10	High alloyed steel, and tool steel	Annealed	200	15	◎	◎	◎
	11		Quenched & Tempered	325	35	◎	◎	◎
M	12	Stainless steel	Ferritic / Martensitic Annealed	200	15	○	○	○
	13		Martensitic Quenched & Tempered	240	23	○	○	○
	14		Austenitic	180	10	○	○	○
K	15	Grey cast iron	Pearlitic / ferritic	180	10	○	○	○
	16		Pearlitic (Martensitic)	260	26	○	○	○
	17	Nodular cast iron	Ferritic	160	3	○	○	○
	18		Pearlitic	250	25	○	○	○
	19	Malleable cast iron	Ferritic	130		○	○	○
20	Pearlitic		230	21	○	○	○	
N	21	Aluminum-wrought alloy	Not Curable	60		○	○	○
	22		Curable Hardened	100		○	○	○
	23	Aluminum-cast, alloyed	≤ 12% Si, Not Curable	75		○	○	○
	24		≤ 12% Si, Curable Hardened	90		○	○	○
	25		> 12% Si, Not Curable	130		○	○	○
	26	Copper and Copper Alloys (Bronze / Brass)	Cutting Alloys, PB>1%	110		○	○	○
	27		CuZn, CuSnZn (Brass)	90		○	○	○
	28		CuSn, lead-free copper and electrolytic copper	100		○	○	○
	29	Non Metallic Materials	Duroplastic, Fiber Reinforced Plastic			○	○	○
	30		Rubber, Wood, etc.					
S	31	Heat Resistant Super Alloys	Fe Based Annealed	200	15	○	○	○
	32		Fe Based Cured	280	30	○	○	○
	33		Fe Based Annealed	250	25	○	○	○
	34		Ni or Co Based Cured	350	38	○	○	○
	35		Ni or Co Based Cast	320	34	○	○	○
	36	Titanium Alloys	Pure Titanium	400 Rm		○	○	○
	37		Alpha + Beta Alloys Hardened	1050 Rm		○	○	○
H	38	Hardened steel	Hardened	550	55			
	39		Hardened	630	60			
	40	Chilled Cast Iron	Cast	400	42	○	○	○
	41	Hardened Cast Iron	Hardened	550	55			





G9A69	G9448	G9540	G9449	G9G51	G9453	G9F45 G9F46	G9A42	G9400
4	4	4	4	4	4	4&6	Multi Flute	2
30°	≈ 30°	≈ 30°	≈ 30°	≈ 30°	30°	45°	30°	30°
SQUARE	SQUARE	SQUARE	SQUARE	SQUARE	SQUARE	SQUARE	ROUGHING	DRILL MILL
D1.0	D2.0	D3.5	D2.0	D3.0	D3.0	D3.0	D6.0	D3.0
D20.0	D20.0	D20.0	D20.0	D20.0	D20.0	D20.0	D25.0	D20.0
48	49	50	51	52	53	54	55	56
SHORT LENGTH	SHORT LENGTH	LONG LENGTH	LONG LENGTH	LONG LENGTH with CHAMFER	EXTRA LONG LENGTH	SHORT LENGTH LONG LENGTH	LONG LENGTH	-
TiAIN	TiAIN	TiAIN	TiAIN	TiAIN	TiAIN	TiAIN	X-Coating	TiAIN

									
⊙	⊙	⊙	⊙	⊙	⊙	○	⊙	⊙	1
⊙	⊙	⊙	⊙	⊙	⊙	○	⊙	⊙	2
⊙	⊙	⊙	⊙	⊙	⊙	○	⊙	⊙	3
⊙	⊙	⊙	⊙	⊙	⊙	○	⊙	⊙	4
⊙	⊙	⊙	⊙	⊙	⊙	○	⊙	⊙	5
⊙	⊙	⊙	⊙	⊙	⊙	○	⊙	⊙	6
⊙	⊙	⊙	⊙	⊙	⊙	○	⊙	⊙	7
⊙	⊙	⊙	⊙	⊙	⊙	○	⊙	⊙	8
⊙	⊙	⊙	⊙	⊙	⊙	○	⊙	⊙	9
⊙	⊙	⊙	⊙	⊙	⊙	○	⊙	⊙	10
⊙	⊙	⊙	⊙	⊙	⊙	○	⊙	⊙	11
○	○	○	○	○	○	○	○	○	12
○	○	○	○	○	○	○	○	○	13
○	○	○	○	○	○	○	○	○	14
○	○	○	○	○	○	○	○	○	15
○	○	○	○	○	○	○	○	○	16
○	○	○	○	○	○	○	○	○	17
○	○	○	○	○	○	○	○	○	18
○	○	○	○	○	○	○	○	○	19
○	○	○	○	○	○	○	○	○	20
○	○	○	○	○	○	○	○	○	21
○	○	○	○	○	○	○	○	○	22
○	○	○	○	○	○	○	○	○	23
○	○	○	○	○	○	○	○	○	24
○	○	○	○	○	○	○	○	○	25
○	○	○	○	○	○	○	○	○	26
○	○	○	○	○	○	○	○	○	27
○	○	○	○	○	○	○	○	○	28
○	○	○	○	○	○	○	○	○	29
○	○	○	○	○	○	○	○	○	30
○	○	○	○	○	○	○	○	○	31
○	○	○	○	○	○	○	○	○	32
○	○	○	○	○	○	○	○	○	33
○	○	○	○	○	○	○	○	○	34
○	○	○	○	○	○	○	○	○	35
○	○	○	○	○	○	○	○	○	36
○	○	○	○	○	○	○	○	○	37
						○			38
						○			39
○	○	○	○	○	○	○	○	○	40
						○			41

# TiAIN-COATED SOLID CARBIDE END MILLS 2 FLUTE SHORT LENGTH BALL NOSE

**G9624** PLAIN SHANK

- ▶ Suitable for dry milling applications at high temperatures.
- ▶ Excellent high-performance end mills.
- ▶ Designed for milling of radius bottom slots, fillets and special contours.

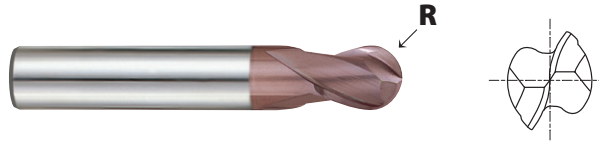

Unit : mm

EDP No.	Radius of Ball Nose	Mill Diameter	Shank Diameter	Length of Cut	Overall Length
	R (±0.02)				
<b>G9624020</b>	R1.0	<b>2.0</b>	6	4	48
<b>G9624025</b>	R1.25	<b>2.5</b>	6	4	48
<b>G9624030</b>	R1.5	<b>3.0</b>	6	4	48
<b>G9624040</b>	R2.0	<b>4.0</b>	6	6	50
<b>G9624901</b>	R2.0	<b>4.0</b>	4	12	40
<b>G9624050</b>	R2.5	<b>5.0</b>	6	7	51
<b>G9624902</b>	R2.5	<b>5.0</b>	5	14	50
<b>G9624060</b>	R3.0	<b>6.0</b>	6	7	51
<b>G9624080</b>	R4.0	<b>8.0</b>	8	9	59
<b>G9624100</b>	R5.0	<b>10.0</b>	10	10	60
<b>G9624120</b>	R6.0	<b>12.0</b>	12	14	71
<b>G9624140</b>	R7.0	<b>14.0</b>	14	14	71
<b>G9624160</b>	R8.0	<b>16.0</b>	16	16	76
<b>G9624180</b>	R9.0	<b>18.0</b>	18	18	76
<b>G9624200</b>	R10.0	<b>20.0</b>	20	20	82

Mill Dia. Tolerance (mm)	Shank Dia. Tolerance
0 ~ - 0.03	h5

◎ : Excellent ○ : Good

ISO Material Description	P										M				K						
	Non-alloy steel					Low alloy steel					High alloyed steel, and tool steel		Stainless steel		Grey cast iron		Nodular cast iron		Malleable cast iron		
VDI 3323	1	2	3	4	5	6	7	8	9	10	11	12	13	14	15	16	17	18	19	20	
HRc		13	25	28	32	10	29	32	38	15	35	15	23	10	10	26	3	25		21	
HB	125	190	250	270	300	180	275	300	350	200	325	200	240	180	180	260	160	250	130	230	
Recommended	◎	◎	◎	◎	◎	◎	◎	◎	◎	◎	◎	○	○	○	○	○	○	○	○	○	
ISO Material Description	N					S					H										
	Aluminum-wrought alloy		Aluminum-cast, alloyed			Copper and Copper Alloys (Bronze / Brass)		Non Metallic Materials			Heat Resistant Super Alloys					Titanium Alloys		Hardened steel	Chilled Cast Iron	Hardened Cast Iron	
VDI 3323	21	22	23	24	25	26	27	28	29	30	31	32	33	34	35	36	37	38	39	40	41
HRc											15	30	25	38	34			55	60	42	55
HB	60	100	75	90	130	110	90	100			200	280	250	350	320	400 Rm	1050 Rm	550	630	400	550
Recommended	○	○	○	○	○	○	○	○			○	○	○	○	○	○	○			○	



**TiAIN-COATED SOLID CARBIDE END MILLS  
2 FLUTE SHORT LENGTH BALL NOSE**

**G9A70 PLAIN SHANK**

- ▶ Suitable for dry milling applications at high temperatures.
- ▶ Excellent high-performance end mills.
- ▶ Designed for milling of radius bottom slots, fillets and special contours.



CARBIDE
2
30°
R ±0.02
DIN 6535HA
P.57

Unit : mm

EDP No.	Radius of Ball Nose	Mill Diameter	Shank Diameter	Length of Cut	Overall Length
	R (±0.02)				
<b>G9A70010</b>	R0.5	<b>1.0</b>	3	3	39
<b>G9A70015</b>	R0.75	<b>1.5</b>	3	5	39
<b>G9A70020</b>	R1.0	<b>2.0</b>	3	7	39
<b>G9A70025</b>	R1.25	<b>2.5</b>	3	8	39
<b>G9A70030</b>	R1.5	<b>3.0</b>	3	9	39
<b>G9A70040</b>	R2.0	<b>4.0</b>	4	14	51
<b>G9A70050</b>	R2.5	<b>5.0</b>	5	16	51
<b>G9A70060</b>	R3.0	<b>6.0</b>	6	19	64
<b>G9A70080</b>	R4.0	<b>8.0</b>	8	21	64
<b>G9A70100</b>	R5.0	<b>10.0</b>	10	22	70
<b>G9A70110</b>	R5.5	<b>11.0</b>	11	25	70
<b>G9A70120</b>	R6.0	<b>12.0</b>	12	25	76
<b>G9A70160</b>	R8.0	<b>16.0</b>	16	32	89
<b>G9A70200</b>	R10.0	<b>20.0</b>	20	38	102

Mill Dia. Tolerance (mm)	Shank Dia. Tolerance
0 ~ -0.03	h5


◎ : Excellent ○ : Good

ISO Material Description	P										M				K						
	Non-alloy steel					Low alloy steel					High alloyed steel, and tool steel	Stainless steel			Grey cast iron	Nodular cast iron	Malleable cast iron				
VDI 3323	1	2	3	4	5	6	7	8	9	10	11	12	13	14	15	16	17	18	19	20	
HRc		13	25	28	32	10	29	32	38	15	35	15	23	10	10	26	3	25		21	
HB	125	190	250	270	300	180	275	300	350	200	325	200	240	180	180	260	160	250	130	230	
Recommended	◎	◎	◎	◎	◎	◎	◎	◎	◎	◎	◎	○	○	○	○	○	○	○	○	○	
ISO Material Description	N					S					H										
	Aluminum-wrought alloy		Aluminum-cast, alloyed			Copper and Copper Alloys (Bronze / Brass)		Non Metallic Materials			Heat Resistant Super Alloys					Titanium Alloys		Hardened steel	Chilled Cast Iron	Hardened Cast Iron	
VDI 3323	21	22	23	24	25	26	27	28	29	30	31	32	33	34	35	36	37	38	39	40	41
HRc											15	30	25	38	34			55	60	42	55
HB	60	100	75	90	130	110	90	100			200	280	250	350	320	400 Rm	1050 Rm	550	630	400	550
Recommended	○	○	○	○	○	○	○	○			○	○	○	○	○	○	○			○	

# TiAIN-COATED SOLID CARBIDE END MILLS 2 FLUTE SHORT LENGTH BALL NOSE

**G9437** FLAT SHANK

- ▶ Suitable for dry milling applications at high temperatures.
- ▶ Excellent high-performance end mills.
- ▶ Designed for milling of radius bottom slots, fillets and special contours.

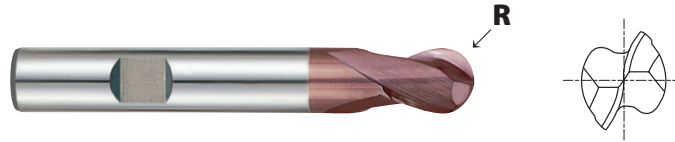

Unit : mm

EDP No.	Radius of Ball Nose	Mill Diameter	Shank Diameter	Length of Cut	Overall Length
	R (±0.02)				
<b>G9437020</b>	R1.0	<b>2.0</b>	6	3	50
<b>G9437030</b>	R1.5	<b>3.0</b>	6	4	50
<b>G9437040</b>	R2.0	<b>4.0</b>	6	5	54
<b>G9437050</b>	R2.5	<b>5.0</b>	6	6	54
<b>G9437060</b>	R3.0	<b>6.0</b>	6	7	54
<b>G9437080</b>	R4.0	<b>8.0</b>	8	9	58
<b>G9437100</b>	R5.0	<b>10.0</b>	10	11	66
<b>G9437120</b>	R6.0	<b>12.0</b>	12	12	73
<b>G9437140</b>	R7.0	<b>14.0</b>	14	14	75
<b>G9437180</b>	R9.0	<b>18.0</b>	18	18	84
<b>G9437200</b>	R10.0	<b>20.0</b>	20	20	92

Mill Dia. Tolerance (mm)	Shank Dia. Tolerance
0 ~ - 0.03	h5

◎ : Excellent ○ : Good

ISO Material Description	P										M				K						
	Non-alloy steel					Low alloy steel					High alloy steel, and tool steel		Stainless steel		Grey cast iron		Nodular cast iron		Malleable cast iron		
VDI 3323	1	2	3	4	5	6	7	8	9	10	11	12	13	14	15	16	17	18	19	20	
HRc		13	25	28	32	10	29	32	38	15	35	15	23	10	10	26	3	25		21	
HB	125	190	250	270	300	180	275	300	350	200	325	200	240	180	180	260	160	250	130	230	
Recommended	◎	◎	◎	◎	◎	◎	◎	◎	◎	◎	◎	○	○	○	○	○	○	○	○	○	
ISO Material Description	N					S					H										
	Aluminum-wrought alloy		Aluminum-cast, alloyed			Copper and Copper Alloys (Bronze / Brass)			Non Metallic Materials		Heat Resistant Super Alloys					Titanium Alloys		Hardened steel	Chilled Cast Iron	Hardened Cast Iron	
VDI 3323	21	22	23	24	25	26	27	28	29	30	31	32	33	34	35	36	37	38	39	40	41
HRc											15	30	25	38	34			55	60	42	55
HB	60	100	75	90	130	110	90	100			200	280	250	350	320	400 Rm	1050 Rm	550	630	400	550
Recommended	○	○	○	○	○	○	○	○			○	○	○	○	○	○	○			○	

**TiAIN-COATED SOLID CARBIDE END MILLS  
2 FLUTE LONG LENGTH BALL NOSE**

**G9438 FLAT SHANK**

- ▶ Suitable for dry milling applications at high temperatures.
- ▶ Excellent high-performance end mills.
- ▶ Designed for milling of radius bottom slots, fillets and special contours.



CARBIDE
DIN 6527
2
30°
R ±0.02
DIN 6535HA
DIN 6535HB
P.57

Unit : mm

EDP No.	Radius of Ball Nose	Mill Diameter	Shank Diameter	Length of Cut	Overall Length
	R (±0.02)				
<b>G9438020</b>	R1.0	<b>2.0</b>	● 3	6	38
<b>G9438030</b>	R1.5	<b>3.0</b>	6	7	57
<b>G9438040</b>	R2.0	<b>4.0</b>	6	8	57
<b>G9438050</b>	R2.5	<b>5.0</b>	6	10	57
<b>G9438060</b>	R3.0	<b>6.0</b>	6	10	57
<b>G9438080</b>	R4.0	<b>8.0</b>	8	16	63
<b>G9438100</b>	R5.0	<b>10.0</b>	10	19	72
<b>G9438120</b>	R6.0	<b>12.0</b>	12	22	83
<b>G9438140</b>	R7.0	<b>14.0</b>	14	22	83
<b>G9438160</b>	R8.0	<b>16.0</b>	16	26	92
<b>G9438180</b>	R9.0	<b>18.0</b>	18	26	92
<b>G9438200</b>	R10.0	<b>20.0</b>	20	32	104

● with plain shank

Mill Dia. Tolerance (mm)	Shank Dia. Tolerance
0 ~ - 0.03	h5



◎ : Excellent ○ : Good

ISO Material Description	P										M				K						
	Non-alloy steel					Low alloy steel					High alloyed steel, and tool steel	Stainless steel			Grey cast iron	Nodular cast iron		Malleable cast iron			
VDI 3323	1	2	3	4	5	6	7	8	9	10	11	12	13	14	15	16	17	18	19	20	
HRc		13	25	28	32	10	29	32	38	15	35	15	23	10	10	26	3	25		21	
HB	125	190	250	270	300	180	275	300	350	200	325	200	240	180	180	260	160	250	130	230	
Recommended	◎	◎	◎	◎	◎	◎	◎	◎	◎	◎	◎	○	○	○	○	○	○	○	○	○	
ISO Material Description	N					S					H										
	Aluminum-wrought alloy		Aluminum-cast, alloyed			Copper and Copper Alloys (Bronze / Brass)			Non Metallic Materials	Heat Resistant Super Alloys					Titanium Alloys		Hardened steel	Chilled Cast Iron	Hardened Cast Iron		
VDI 3323	21	22	23	24	25	26	27	28	29	30	31	32	33	34	35	36	37	38	39	40	41
HRc											15	30	25	38	34			55	60	42	55
HB	60	100	75	90	130	110	90	100			200	280	250	350	320	400 Rm	1050 Rm	550	630	400	550
Recommended	○	○	○	○	○	○	○	○			○	○	○	○	○	○	○			○	

# TiAIN-COATED SOLID CARBIDE END MILLS 2 FLUTE LONG REACH BALL NOSE

**G9454** PLAIN SHANK

- ▶ Suitable for dry milling applications at high temperatures.
- ▶ Excellent high-performance end mills.
- ▶ Designed for milling of radius bottom slots, fillets and special contours.

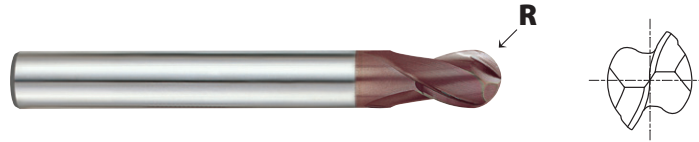

Unit : mm

EDP No.	Radius of Ball Nose	Mill Diameter	Shank Diameter	Length of Cut	Overall Length
	R (±0.02)				
<b>G9454030</b>	R1.5	<b>3.0</b>	3	5	75
<b>G9454040</b>	R2.0	<b>4.0</b>	4	8	75
<b>G9454050</b>	R2.5	<b>5.0</b>	5	9	75
<b>G9454060</b>	R3.0	<b>6.0</b>	6	10	100
<b>G9454080</b>	R4.0	<b>8.0</b>	8	12	100
<b>G9454100</b>	R5.0	<b>10.0</b>	10	14	100
<b>G9454120</b>	R6.0	<b>12.0</b>	12	16	100
<b>G9454140</b>	R7.0	<b>14.0</b>	14	18	100
<b>G9454160</b>	R8.0	<b>16.0</b>	16	22	150
<b>G9454200</b>	R10.0	<b>20.0</b>	20	26	150

Mill Dia. Tolerance (mm)	Shank Dia. Tolerance
0 ~ - 0.03	h5


◎ : Excellent ○ : Good

ISO Material Description	P										M				K						
	Non-alloy steel					Low alloy steel					High alloyed steel, and tool steel		Stainless steel		Grey cast iron		Nodular cast iron		Malleable cast iron		
VDI 3323	1	2	3	4	5	6	7	8	9	10	11	12	13	14	15	16	17	18	19	20	
HRc		13	25	28	32	10	29	32	38	15	35	15	23	10	10	26	3	25		21	
HB	125	190	250	270	300	180	275	300	350	200	325	200	240	180	180	260	160	250	130	230	
Recommended	◎	◎	◎	◎	◎	◎	◎	◎	◎	◎	◎	○	○	○	○	○	○	○	○	○	
ISO Material Description	N					S					H										
	Aluminum-wrought alloy		Aluminum-cast, alloyed			Copper and Copper Alloys (Bronze / Brass)			Non Metallic Materials		Heat Resistant Super Alloys					Titanium Alloys		Hardened steel	Chilled Cast Iron	Hardened Cast Iron	
VDI 3323	21	22	23	24	25	26	27	28	29	30	31	32	33	34	35	36	37	38	39	40	41
HRc											15	30	25	38	34			55	60	42	55
HB	60	100	75	90	130	110	90	100			200	280	250	350	320	400 Rm	1050 Rm	550	630	400	550
Recommended	○	○	○	○	○	○	○	○			○	○	○	○	○	○	○			○	

**TiAIN-COATED SOLID CARBIDE END MILLS  
2 FLUTE EXTRA LONG LENGTH BALL NOSE**

**G9455 PLAIN SHANK**

- ▶ Suitable for dry milling applications at high temperatures.
- ▶ Excellent high-performance end mills.
- ▶ Designed for milling of radius bottom slots, fillets and special contours.



Unit : mm

EDP No.	Radius of Ball Nose	Mill Diameter	Shank Diameter	Length of Cut	Overall Length
	R (±0.02)				
<b>G9455903</b>	R1.5	<b>3.0</b>	3	20	60
<b>G9455030</b>	R1.5	<b>3.0</b>	3	30	75
<b>G9455904</b>	R2.0	<b>4.0</b>	4	20	60
<b>G9455040</b>	R2.0	<b>4.0</b>	4	30	75
<b>G9455905</b>	R2.5	<b>5.0</b>	5	25	75
<b>G9455050</b>	R2.5	<b>5.0</b>	5	40	100
<b>G9455906</b>	R3.0	<b>6.0</b>	6	30	75
<b>G9455060</b>	R3.0	<b>6.0</b>	6	50	150
<b>G9455908</b>	R4.0	<b>8.0</b>	8	30	75
<b>G9455080</b>	R4.0	<b>8.0</b>	8	50	150
<b>G9455910</b>	R5.0	<b>10.0</b>	10	40	100
<b>G9455100</b>	R5.0	<b>10.0</b>	10	60	150
<b>G9455912</b>	R6.0	<b>12.0</b>	12	45	100
<b>G9455120</b>	R6.0	<b>12.0</b>	12	75	150
<b>G9455914</b>	R7.0	<b>14.0</b>	14	45	100
<b>G9455140</b>	R7.0	<b>14.0</b>	14	75	150
<b>G9455916</b>	R8.0	<b>16.0</b>	16	45	100
<b>G9455160</b>	R8.0	<b>16.0</b>	16	75	150
<b>G9455918</b>	R9.0	<b>18.0</b>	18	45	100
<b>G9455180</b>	R9.0	<b>18.0</b>	18	75	150
<b>G9455920</b>	R10.0	<b>20.0</b>	20	45	100
<b>G9455200</b>	R10.0	<b>20.0</b>	20	75	150

Mill Dia. Tolerance (mm)	Shank Dia. Tolerance
0 ~ -0.03	h5


◎ : Excellent ○ : Good

ISO Material Description	P										M				K						
	Non-alloy steel					Low alloy steel					High alloyed steel, and tool steel	Stainless steel			Grey cast iron		Nodular cast iron		Malleable cast iron		
VDI 3323	1	2	3	4	5	6	7	8	9	10	11	12	13	14	15	16	17	18	19	20	
HRc	13	25	28	32	10	29	32	38	15	35	15	23	10	10	26	3	25		21		
HB	125	190	250	270	300	180	275	300	350	200	325	200	240	180	180	260	160	250	130	230	
Recommended	◎	◎	◎	◎	◎	◎	◎	◎	◎	◎	◎	○	○	○	○	○	○	○	○	○	
ISO Material Description	N										S						H				
	Aluminum-wrought alloy		Aluminum-cast, alloyed			Copper and Copper Alloys (Bronze / Brass)			Non Metallic Materials		Heat Resistant Super Alloys						Titanium Alloys		Hardened steel	Chilled Cast Iron	Hardened Cast Iron
VDI 3323	21	22	23	24	25	26	27	28	29	30	31	32	33	34	35	36	37	38	39	40	41
HRc											15	30	25	38	34			55	60	42	55
HB	60	100	75	90	130	110	90	100			200	280	250	350	320	400 Rm	1050 Rm	550	630	400	550
Recommended	○	○	○	○	○	○	○	○			○	○	○	○	○	○	○			○	

# TiAIN-COATED SOLID CARBIDE END MILLS 2 FLUTE BALL NOSE RIB PROCESSING

**G9B81** PLAIN SHANK

- Suitable for dry milling applications at high temperatures.
- Excellent high-performance end mills.
- Designed for milling of radius bottom slots, fillets and special contours.

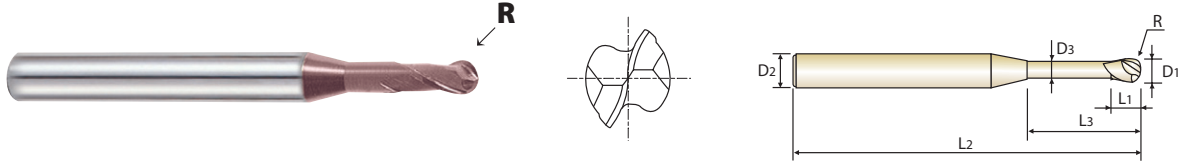

Unit : mm

EDP No.	Radius of Ball Nose	Mill Diameter	Shank Diameter	Length of Cut	Length Below Shank	Overall Length	Neck Diameter
	R (±0.02)	D1	D2	L1	L3	L2	D3
G9B81004	R0.2	0.4	4	0.7	2	50	0.37
G9B81005	R0.25	0.5	4	0.75	2	50	0.45
G9B81901	R0.25	0.5	4	0.75	4	50	0.45
G9B81902	R0.25	0.5	4	0.75	6	50	0.45
G9B81006	R0.3	0.6	4	0.9	2	50	0.55
G9B81903	R0.3	0.6	4	0.9	4	50	0.55
G9B81904	R0.3	0.6	4	0.9	6	50	0.55
G9B81008	R0.4	0.8	4	1.2	4	50	0.75
G9B81905	R0.4	0.8	4	1.2	6	50	0.75
G9B81906	R0.4	0.8	4	1.2	8	50	0.75
G9B81010	R0.5	1.0	4	1.5	6	50	0.95
G9B81907	R0.5	1.0	4	1.5	8	50	0.95
G9B81908	R0.5	1.0	4	1.5	10	50	0.95
G9B81909	R0.5	1.0	4	1.5	12	50	0.95
G9B81012	R0.6	1.2	4	1.8	8	50	1.15
G9B81910	R0.6	1.2	4	1.8	12	50	1.15
G9B81014	R0.7	1.4	4	2.1	16	50	1.35
G9B81015	R0.75	1.5	4	2.3	6	50	1.45
G9B81911	R0.75	1.5	4	2.3	8	50	1.45
G9B81912	R0.75	1.5	4	2.3	10	50	1.45
G9B81913	R0.75	1.5	4	2.3	12	50	1.45
G9B81914	R0.75	1.5	4	2.3	16	50	1.45

► NEXT PAGE

Mill Dia. Tolerance (mm)	Shank Dia. Tolerance
0 ~ - 0.03	h5


◎ : Excellent ○ : Good

ISO Material Description	P										M				K						
	Non-alloy steel					Low alloy steel					High alloyed steel, and tool steel		Stainless steel		Grey cast iron		Nodular cast iron		Malleable cast iron		
VDI 3323	1	2	3	4	5	6	7	8	9	10	11	12	13	14	15	16	17	18	19	20	
HRc	13	25	28	32	10	29	32	38	15	35	15	23	10	10	26	3	25		21		
HB	125	190	250	270	300	180	275	300	350	200	325	200	240	180	180	260	160	250	130	230	
Recommended	◎	◎	◎	◎	◎	◎	◎	◎	◎	◎	◎	○	○	○	○	○	○	○	○	○	
ISO Material Description	N					S					H										
	Aluminum-wrought alloy		Aluminum-cast, alloyed			Copper and Copper Alloys (Bronze / Brass)			Non Metallic Materials		Heat Resistant Super Alloys					Titanium Alloys		Hardened steel		Chilled Cast Iron	Hardened Cast Iron
VDI 3323	21	22	23	24	25	26	27	28	29	30	31	32	33	34	35	36	37	38	39	40	41
HRc											15	30	25	38	34			55	60	42	55
HB	60	100	75	90	130	110	90	100			200	280	250	350	320	400 Rm	1050 Rm	550	630	400	550
Recommended	○	○	○	○	○	○	○	○													

**TiAIN-COATED SOLID CARBIDE END MILLS  
2 FLUTE BALL NOSE RIB PROCESSING**

**G9B81 PLAIN SHANK**

- ▶ Suitable for dry milling applications at high temperatures.
- ▶ Excellent high-performance end mills.
- ▶ Designed for milling of radius bottom slots, fillets and special contours.

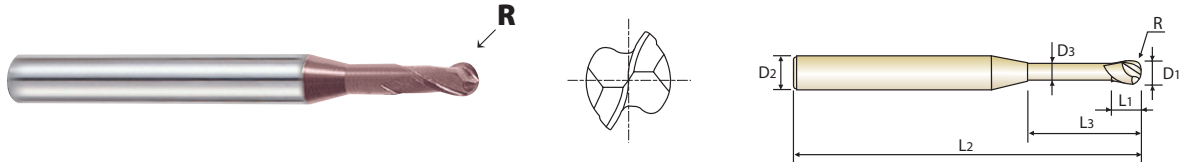

CARBIDE
2
30°
R ±0.02
DIN 6535HA
P.58~59

Unit : mm

EDP No.	Radius of Ball Nose	Mill Diameter	Shank Diameter	Length of Cut	Length Below Shank	Overall Length	Neck Diameter
	R (±0.02)	D1	D2	L1	L3	L2	D3
G9B81915	R0.75	1.5	4	2.3	20	50	1.45
G9B81016	R0.8	1.6	4	2.4	8	50	1.55
G9B81916	R0.8	1.6	4	2.4	12	50	1.55
G9B81917	R0.8	1.6	4	2.4	16	50	1.55
G9B81918	R0.8	1.6	4	2.4	20	50	1.55
G9B81020	R1.0	2.0	4	3	8	50	1.95
G9B81919	R1.0	2.0	4	3	10	50	1.95
G9B81920	R1.0	2.0	4	3	12	50	1.95
G9B81921	R1.0	2.0	4	3	14	50	1.95
G9B81922	R1.0	2.0	4	3	16	50	1.95
G9B81923	R1.0	2.0	4	3	20	50	1.95
G9B81030	R1.5	3.0	6	4.5	10	50	2.85
G9B81924	R1.5	3.0	6	4.5	12	50	2.85
G9B81925	R1.5	3.0	6	4.5	16	60	2.85
G9B81926	R1.5	3.0	6	4.5	20	60	2.85
G9B81927	R1.5	3.0	6	4.5	25	75	2.85
G9B81040	R2.0	4.0	6	6	12	50	3.85
G9B81928	R2.0	4.0	6	6	16	60	3.85
G9B81929	R2.0	4.0	6	6	20	75	3.85
G9B81930	R2.0	4.0	6	6	25	75	3.85
G9B81931	R2.0	4.0	6	6	30	75	3.85

Mill Dia. Tolerance (mm)	Shank Dia. Tolerance
0 ~ - 0.03	h5



◎ : Excellent ○ : Good

ISO Material Description	P											M				K					
	Non-alloy steel					Low alloy steel				High alloy steel, and tool steel	Stainless steel			Grey cast iron		Nodular cast iron		Malleable cast iron			
VDI 3323	1	2	3	4	5	6	7	8	9	10	11	12	13	14	15	16	17	18	19	20	
HRc	13	25	28	32	10	29	32	38	15	35	15	23	10	10	26	3	25		21		
HB	125	190	250	270	300	180	275	300	350	200	325	200	240	180	180	260	160	250	130	230	
Recommended	◎	◎	◎	◎	◎	◎	◎	◎	◎	◎	◎	○	○	○	○	○	○	○	○	○	
ISO Material Description	N					S					H										
	Aluminum-wrought alloy		Aluminum-cast, alloyed			Copper and Copper Alloys (Bronze / Brass)		Non Metallic Materials			Heat Resistant Super Alloys			Titanium Alloys		Hardened steel	Chilled Cast Iron	Hardened Cast Iron			
VDI 3323	21	22	23	24	25	26	27	28	29	30	31	32	33	34	35	36	37	38	39	40	41
HRc											15	30	25	38	34			55	60	42	55
HB	60	100	75	90	130	110	90	100			200	280	250	350	320	400 Rm	1050 Rm	550	630	400	550
Recommended	○	○	○	○	○	○	○	○													

# TiAIN-COATED SOLID CARBIDE END MILLS 4 FLUTE SHORT LENGTH BALL NOSE

**G9634** PLAIN SHANK

- ▶ Suitable for dry milling applications at high temperatures.
- ▶ Excellent high-performance end mills.
- ▶ 4 flute allows for better work piece finishes.
- ▶ Designed for milling of radius bottom slots, fillets and special contours.

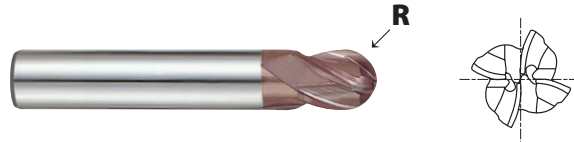

Unit : mm

EDP No.	Radius of Ball Nose	Mill Diameter	Shank Diameter	Length of Cut	Overall Length
	R (±0.02)				
<b>G9634020</b>	R1.0	<b>2.0</b>	6	4	48
<b>G9634030</b>	R1.5	<b>3.0</b>	6	4	48
<b>G9634040</b>	R2.0	<b>4.0</b>	6	6	50
<b>G9634050</b>	R2.5	<b>5.0</b>	6	7	51
<b>G9634060</b>	R3.0	<b>6.0</b>	6	7	51
<b>G9634080</b>	R4.0	<b>8.0</b>	8	9	59
<b>G9634100</b>	R5.0	<b>10.0</b>	10	10	60
<b>G9634120</b>	R6.0	<b>12.0</b>	12	14	71
<b>G9634140</b>	R7.0	<b>14.0</b>	14	14	71
<b>G9634160</b>	R8.0	<b>16.0</b>	16	16	76
<b>G9634180</b>	R9.0	<b>18.0</b>	18	18	76
<b>G9634200</b>	R10.0	<b>20.0</b>	20	20	82

Mill Dia. Tolerance (mm)	Shank Dia. Tolerance
0 ~ - 0.03	h5

◎ : Excellent ○ : Good

ISO Material Description	P										M				K						
	Non-alloy steel					Low alloy steel					High alloyed steel, and tool steel		Stainless steel		Grey cast iron		Nodular cast iron		Malleable cast iron		
VDI 3323	1	2	3	4	5	6	7	8	9	10	11	12	13	14	15	16	17	18	19	20	
HRc		13	25	28	32	10	29	32	38	15	35	15	23	10	10	26	3	25		21	
HB	125	190	250	270	300	180	275	300	350	200	325	200	240	180	180	260	160	250	130	230	
Recommended	◎	◎	◎	◎	◎	◎	◎	◎	◎	◎	◎	○	○	○	○	○	○	○	○	○	
ISO Material Description	N					S					H										
	Aluminum-wrought alloy		Aluminum-cast, alloyed			Copper and Copper Alloys (Bronze / Brass)		Non Metallic Materials			Heat Resistant Super Alloys					Titanium Alloys		Hardened steel	Chilled Cast Iron	Hardened Cast Iron	
VDI 3323	21	22	23	24	25	26	27	28	29	30	31	32	33	34	35	36	37	38	39	40	41
HRc											15	30	25	38	34			55	60	42	55
HB	60	100	75	90	130	110	90	100			200	280	250	350	320	400 Rm	1050 Rm	550	630	400	550
Recommended	○	○	○	○	○	○	○	○			○	○	○	○	○	○	○			○	



**TiAIN-COATED SOLID CARBIDE END MILLS  
2 FLUTE SHORT LENGTH CORNER RADIUS**

**G9B82 PLAIN SHANK**

- ▶ Suitable for dry milling applications at high temperatures.
- ▶ Excellent high-performance end mills.
- ▶ 2 flute design for slotting.



Unit : mm

EDP No.	Corner Radius	Mill Diameter	Shank Diameter	Length of Cut	Overall Length
	R				
G9B82020	R0.2	2.0	4	4	50
G9B82901	R0.3	2.0	4	4	50
G9B82902	R0.5	2.0	4	4	50
G9B82025	R0.2	2.5	4	5	50
G9B82903	R0.3	2.5	4	5	50
G9B82904	R0.5	2.5	4	5	50
G9B82030	R0.2	3.0	4	6	50
G9B82905	R0.3	3.0	4	6	50
G9B82906	R0.5	3.0	4	6	50
G9B82907	R1.0	3.0	4	6	50
G9B82040	R0.2	4.0	4	8	50
G9B82908	R0.3	4.0	4	8	50
G9B82909	R0.5	4.0	4	8	50
G9B82910	R1.0	4.0	4	8	50
G9B82050	R0.2	5.0	6	10	50
G9B82911	R0.3	5.0	6	10	50
G9B82912	R0.5	5.0	6	10	50
G9B82913	R1.0	5.0	6	10	50
G9B82060	R0.2	6.0	6	12	50
G9B82914	R0.3	6.0	6	12	50
G9B82915	R0.5	6.0	6	12	50
G9B82916	R1.0	6.0	6	12	50

▶ NEXT PAGE

Mill Dia. Tolerance (mm)	Shank Dia. Tolerance
0 ~ - 0.03	h5

◎ : Excellent ○ : Good

ISO Material Description	P										M				K						
	Non-alloy steel					Low alloy steel					High alloyed steel, and tool steel		Stainless steel		Grey cast iron		Nodular cast iron		Malleable cast iron		
VDI 3323	1	2	3	4	5	6	7	8	9	10	11	12	13	14	15	16	17	18	19	20	
HRc	13	25	28	32	10	29	32	38	15	35	15	23	10	10	26	3	25			21	
HB	125	190	250	270	300	180	275	300	350	200	325	200	240	180	180	260	160	250	130	230	
Recommended	◎	◎	◎	◎	◎	◎	◎	◎	◎	◎	◎	○	○	○	○	○	○	○	○	○	
ISO Material Description	N					S					H										
	Aluminum-wrought alloy		Aluminum-cast, alloyed			Copper and Copper Alloys (Bronze / Brass)			Non Metallic Materials		Heat Resistant Super Alloys					Titanium Alloys		Hardened steel	Chilled Cast Iron	Hardened Cast Iron	
VDI 3323	21	22	23	24	25	26	27	28	29	30	31	32	33	34	35	36	37	38	39	40	41
HRc											15	30	25	38	34			55	60	42	55
HB	60	100	75	90	130	110	90	100			200	280	250	350	320	400 Rm	1050 Rm	550	630	400	550
Recommended	○	○	○	○	○	○	○	○	○	○										○	

# TiAIN-COATED SOLID CARBIDE END MILLS 2 FLUTE SHORT LENGTH CORNER RADIUS

**G9B82** PLAIN SHANK

- ▶ Suitable for dry milling applications at high temperatures.
- ▶ Excellent high-performance end mills.
- ▶ 2 flute design for slotting.



Unit : mm

EDP No.	Corner Radius	Mill Diameter	Shank Diameter	Length of Cut	Overall Length
	R				
G9B82080	R0.5	8.0	8	16	60
G9B82917	R1.0	8.0	8	16	60
G9B82918	R1.5	8.0	8	16	60
G9B82919	R2.0	8.0	8	16	60
G9B82920	R2.5	8.0	8	16	60
G9B82100	R0.5	10.0	10	20	75
G9B82921	R1.0	10.0	10	20	75
G9B82922	R1.5	10.0	10	20	75
G9B82923	R2.0	10.0	10	20	75
G9B82924	R2.5	10.0	10	20	75
G9B82120	R0.5	12.0	12	24	75
G9B82925	R1.0	12.0	12	24	75
G9B82926	R1.5	12.0	12	24	75
G9B82927	R2.0	12.0	12	24	75
G9B82928	R2.5	12.0	12	24	75

Mill Dia. Tolerance (mm)	Shank Dia. Tolerance
0 ~ - 0.03	h5


◎ : Excellent ○ : Good

ISO Material Description	P										M				K						
	Non-alloy steel					Low alloy steel					High alloyed steel, and tool steel		Stainless steel		Grey cast iron		Nodular cast iron		Malleable cast iron		
VDI 3323	1	2	3	4	5	6	7	8	9	10	11	12	13	14	15	16	17	18	19	20	
HRc		13	25	28	32	10	29	32	38	15	35	15	23	10	10	26	3	25		21	
HB	125	190	250	270	300	180	275	300	350	200	325	200	240	180	180	260	160	250	130	230	
Recommended	◎	◎	◎	◎	◎	◎	◎	◎	◎	◎	◎	○	○	○	○	○	○	○	○	○	
ISO Material Description	N					S					H										
	Aluminum-wrought alloy		Aluminum-cast, alloyed			Copper and Copper Alloys (Bronze / Brass)		Non Metallic Materials			Heat Resistant Super Alloys					Titanium Alloys		Hardened steel	Chilled Cast Iron	Hardened Cast Iron	
VDI 3323	21	22	23	24	25	26	27	28	29	30	31	32	33	34	35	36	37	38	39	40	41
HRc											15	30	25	38	34			55	60	42	55
HB	60	100	75	90	130	110	90	100			200	280	250	350	320	400 Rm	1050 Rm	550	630	400	550
Recommended	○	○	○	○	○	○	○	○	○											○	

**TiAIN-COATED SOLID CARBIDE END MILLS  
2 FLUTE LONG REACH CORNER RADIUS**

**G9B83 PLAIN SHANK**

- ▶ Suitable for dry milling applications at high temperatures.
- ▶ Excellent high-performance end mills.
- ▶ 2 flute design for slotting.

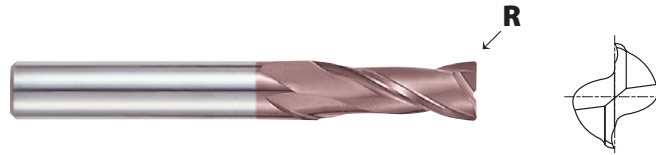

Unit : mm

EDP No.	Corner Radius	Mill Diameter	Shank Diameter	Length of Cut	Overall Length
	R				
G9B83030	R0.5	3.0	4	6	75
G9B83901	R1.0	3.0	4	6	75
G9B83040	R0.5	4.0	4	8	75
G9B83902	R1.0	4.0	4	8	75
G9B83050	R0.5	5.0	6	10	75
G9B83903	R1.0	5.0	6	10	75
G9B83060	R0.5	6.0	6	12	75
G9B83904	R1.0	6.0	6	12	75
G9B83080	R0.5	8.0	8	16	100
G9B83905	R1.0	8.0	8	16	100
G9B83906	R1.5	8.0	8	16	100
G9B83907	R2.0	8.0	8	16	100
G9B83908	R2.5	8.0	8	16	100
G9B83100	R0.5	10.0	10	20	100
G9B83909	R1.0	10.0	10	20	100
G9B83910	R1.5	10.0	10	20	100
G9B83911	R2.0	10.0	10	20	100
G9B83912	R2.5	10.0	10	20	100
G9B83120	R0.5	12.0	12	24	100
G9B83913	R1.0	12.0	12	24	100
G9B83914	R1.5	12.0	12	24	100
G9B83915	R2.0	12.0	12	24	100
G9B83916	R2.5	12.0	12	24	100

Mill Dia. Tolerance (mm)	Shank Dia. Tolerance
0 ~ - 0.03	h5


◎ : Excellent ○ : Good

ISO Material Description	P										M				K						
	Non-alloy steel					Low alloy steel					High alloyed steel, and tool steel		Stainless steel		Grey cast iron		Nodular cast iron		Malleable cast iron		
VDI 3323	1	2	3	4	5	6	7	8	9	10	11	12	13	14	15	16	17	18	19	20	
HRc	13	25	28	32	10	29	32	38	15	35	15	23	10	10	26	3	25		21		
HB	125	190	250	270	300	180	275	300	350	200	325	200	240	180	180	260	160	250	130	230	
Recommended	◎	◎	◎	◎	◎	◎	◎	◎	◎	◎	◎	○	○	○	○	○	○	○	○	○	
ISO Material Description	N										S						H				
	Aluminum-wrought alloy		Aluminum-cast, alloyed			Copper and Copper Alloys (Bronze / Brass)			Non Metallic Materials		Heat Resistant Super Alloys						Titanium Alloys		Hardened steel	Chilled Cast Iron	Hardened Cast Iron
VDI 3323	21	22	23	24	25	26	27	28	29	30	31	32	33	34	35	36	37	38	39	40	41
HRc											15	30	25	38	34			55	60	42	55
HB	60	100	75	90	130	110	90	100			200	280	250	350	320	400 Rm	1050 Rm	550	630	400	550
Recommended	○	○	○	○	○	○	○	○	○	○										○	

# TiAIN-COATED SOLID CARBIDE END MILLS 4 FLUTE SHORT LENGTH CORNER RADIUS

**G9B84** PLAIN SHANK

- ▶ Suitable for dry milling applications at high temperatures.
- ▶ Excellent high-performance end mills.
- ▶ Designed for milling of radius bottom slots, fillets and special contours.

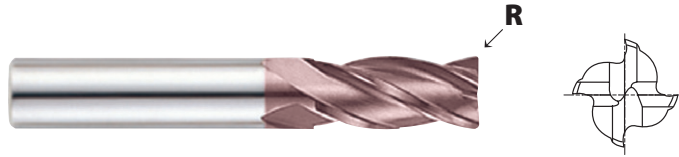

Unit : mm

EDP No.	Corner Radius	Mill Diameter	Shank Diameter	Length of Cut	Overall Length
	R				
G9B84020	R0.2	2.0	4	4	50
G9B84901	R0.3	2.0	4	4	50
G9B84902	R0.5	2.0	4	4	50
G9B84025	R0.2	2.5	4	5	50
G9B84903	R0.3	2.5	4	5	50
G9B84904	R0.5	2.5	4	5	50
G9B84030	R0.2	3.0	4	6	50
G9B84905	R0.3	3.0	4	6	50
G9B84906	R0.5	3.0	4	6	50
G9B84907	R1.0	3.0	4	6	50
G9B84040	R0.2	4.0	4	8	50
G9B84908	R0.3	4.0	4	8	50
G9B84909	R0.5	4.0	4	8	50
G9B84910	R1.0	4.0	4	8	50
G9B84050	R0.2	5.0	6	10	50
G9B84911	R0.3	5.0	6	10	50
G9B84912	R0.5	5.0	6	10	50
G9B84913	R1.0	5.0	6	10	50
G9B84060	R0.2	6.0	6	12	50
G9B84914	R0.3	6.0	6	12	50
G9B84915	R0.5	6.0	6	12	50

▶ NEXT PAGE

Mill Dia. Tolerance (mm)	Shank Dia. Tolerance
0 ~ - 0.03	h5

◎ : Excellent ○ : Good

ISO Material Description	P										M				K						
	Non-alloy steel					Low alloy steel					High alloyed steel, and tool steel	Stainless steel			Grey cast iron	Nodular cast iron		Malleable cast iron			
VDI 3323	1	2	3	4	5	6	7	8	9	10	11	12	13	14	15	16	17	18	19	20	
HRc	13	25	28	32	10	29	32	38	15	35	15	23	10	10	26	3	25		21		
HB	125	190	250	270	300	180	275	300	350	200	325	200	240	180	180	260	160	250	130	230	
Recommended	◎	◎	◎	◎	◎	◎	◎	◎	◎	◎	◎	○	○	○	○	○	○	○	○	○	
ISO Material Description	N					S					H										
	Aluminum-wrought alloy		Aluminum-cast, alloyed			Copper and Copper Alloys (Bronze / Brass)		Non Metallic Materials			Heat Resistant Super Alloys					Titanium Alloys		Hardened steel	Chilled Cast Iron	Hardened Cast Iron	
VDI 3323	21	22	23	24	25	26	27	28	29	30	31	32	33	34	35	36	37	38	39	40	41
HRc											15	30	25	38	34			55	60	42	55
HB	60	100	75	90	130	110	90	100			200	280	250	350	320	400 Rm	1050 Rm	550	630	400	550
Recommended	○	○	○	○	○	○	○	○	○											○	

**TiAIN-COATED SOLID CARBIDE END MILLS  
4 FLUTE SHORT LENGTH CORNER RADIUS**

**G9B84 PLAIN SHANK**

- ▶ Suitable for dry milling applications at high temperatures.
- ▶ Excellent high-performance end mills.
- ▶ Designed for milling of radius bottom slots, fillets and special contours.



Unit : mm

EDP No.	Corner Radius	Mill Diameter	Shank Diameter	Length of Cut	Overall Length
	R				
<b>G9B84916</b>	R1.0	<b>6.0</b>	6	12	50
<b>G9B84080</b>	R0.5	<b>8.0</b>	8	16	60
<b>G9B84917</b>	R1.0	<b>8.0</b>	8	16	60
<b>G9B84918</b>	R1.5	<b>8.0</b>	8	16	60
<b>G9B84919</b>	R2.0	<b>8.0</b>	8	16	60
<b>G9B84920</b>	R2.5	<b>8.0</b>	8	16	60
<b>G9B84100</b>	R0.5	<b>10.0</b>	10	20	75
<b>G9B84921</b>	R1.0	<b>10.0</b>	10	20	75
<b>G9B84922</b>	R1.5	<b>10.0</b>	10	20	75
<b>G9B84923</b>	R2.0	<b>10.0</b>	10	20	75
<b>G9B84924</b>	R2.5	<b>10.0</b>	10	20	75
<b>G9B84120</b>	R0.5	<b>12.0</b>	12	24	75
<b>G9B84925</b>	R1.0	<b>12.0</b>	12	24	75
<b>G9B84926</b>	R1.5	<b>12.0</b>	12	24	75
<b>G9B84927</b>	R2.0	<b>12.0</b>	12	24	75
<b>G9B84928</b>	R2.5	<b>12.0</b>	12	24	75

Mill Dia. Tolerance (mm)	Shank Dia. Tolerance
0 ~ - 0.03	h5


◎ : Excellent ○ : Good

ISO Material Description	P										M				K						
	Non-alloy steel					Low alloy steel					High alloy steel, and tool steel	Stainless steel			Grey cast iron	Nodular cast iron		Malleable cast iron			
VDI 3323	1	2	3	4	5	6	7	8	9	10	11	12	13	14	15	16	17	18	19	20	
HRc		13	25	28	32	10	29	32	38	15	35	15	23	10	10	26	3	25		21	
HB	125	190	250	270	300	180	275	300	350	200	325	200	240	180	180	260	160	250	130	230	
Recommended	◎	◎	◎	◎	◎	◎	◎	◎	◎	◎	◎	○	○	○	○	○	○	○	○	○	
ISO Material Description	N					S					H										
	Aluminum-wrought alloy		Aluminum-cast, alloyed			Copper and Copper Alloys (Bronze / Brass)			Non Metallic Materials	Heat Resistant Super Alloys					Titanium Alloys		Hardened steel	Chilled Cast Iron	Hardened Cast Iron		
VDI 3323	21	22	23	24	25	26	27	28	29	30	31	32	33	34	35	36	37	38	39	40	41
HRc											15	30	25	38	34			55	60	42	55
HB	60	100	75	90	130	110	90	100			200	280	250	350	320	400 Rm	1050 Rm	550	630	400	550
Recommended	○	○	○	○	○	○	○	○	○											○	

# TiAIN-COATED SOLID CARBIDE END MILLS 4 FLUTE LONG REACH CORNER RADIUS

**G9B85** PLAIN SHANK

- ▶ Suitable for dry milling applications at high temperatures.
- ▶ Excellent high-performance end mills.
- ▶ Designed for milling of radius bottom slots, fillets and special contours.

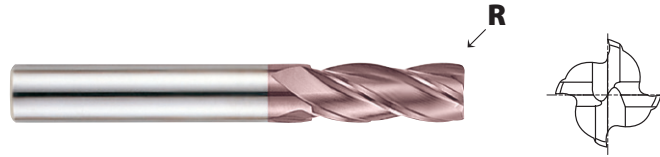

Unit : mm

EDP No.	Corner Radius	Mill Diameter	Shank Diameter	Length of Cut	Overall Length
	R				
G9B85030	R0.5	3.0	4	6	75
G9B85901	R1.0	3.0	4	6	75
G9B85040	R0.5	4.0	4	8	75
G9B85902	R1.0	4.0	4	8	75
G9B85050	R0.5	5.0	6	10	75
G9B85903	R1.0	5.0	6	10	75
G9B85060	R0.5	6.0	6	12	75
G9B85904	R1.0	6.0	6	12	75
G9B85080	R0.5	8.0	8	16	100
G9B85905	R1.0	8.0	8	16	100
G9B85906	R1.5	8.0	8	16	100
G9B85907	R2.0	8.0	8	16	100
G9B85908	R2.5	8.0	8	16	100
G9B85100	R0.5	10.0	10	20	100
G9B85909	R1.0	10.0	10	20	100
G9B85910	R1.5	10.0	10	20	100
G9B85911	R2.0	10.0	10	20	100
G9B85912	R2.5	10.0	10	20	100
G9B85120	R0.5	12.0	12	24	100
G9B85913	R1.0	12.0	12	24	100
G9B85914	R1.5	12.0	12	24	100
G9B85915	R2.0	12.0	12	24	100
G9B85916	R2.5	12.0	12	24	100

Mill Dia. Tolerance (mm)	Shank Dia. Tolerance
0 ~ - 0.03	h5


◎ : Excellent ○ : Good

ISO Material Description	P										M				K						
	Non-alloy steel					Low alloy steel					High alloyed steel, and tool steel	Stainless steel			Grey cast iron	Nodular cast iron		Malleable cast iron			
VDI 3323	1	2	3	4	5	6	7	8	9	10	11	12	13	14	15	16	17	18	19	20	
HRc	13	25	28	32	10	29	32	38	15	35	15	23	10	10	26	3	25		21		
HB	125	190	250	270	300	180	275	300	350	200	325	200	240	180	180	260	160	250	130	230	
Recommended	◎	◎	◎	◎	◎	◎	◎	◎	◎	◎	◎	○	○	○	○	○	○	○	○	○	
ISO Material Description	N					S					H										
	Aluminum-wrought alloy		Aluminum-cast, alloyed			Copper and Copper Alloys (Bronze / Brass)			Non Metallic Materials		Heat Resistant Super Alloys					Titanium Alloys		Hardened steel	Chilled Cast Iron	Hardened Cast Iron	
VDI 3323	21	22	23	24	25	26	27	28	29	30	31	32	33	34	35	36	37	38	39	40	41
HRc											15	30	25	38	34			55	60	42	55
HB	60	100	75	90	130	110	90	100			200	280	250	350	320	400 Rm	1050 Rm	550	630	400	550
Recommended	○	○	○	○	○	○	○	○	○											○	

**TiAIN-COATED SOLID CARBIDE END MILLS  
2 FLUTE SHORT LENGTH**

**G9424 PLAIN SHANK**

- ▶ Suitable for dry milling applications at high temperatures.
- ▶ Excellent high-performance end mills.
- ▶ 2 flute design for slotting.



CARBIDE
2
30°
DIN 6535HA
P.63

Unit : mm

EDP No.	Mill Diameter	Shank Diameter	Length of Cut	Overall Length
G9424010	1.0	4	3	40
G9424015	1.5	4	4.5	40
G9424020	2.0	2	8	32
G9424025	2.5	2.5	8	32
G9424030	3.0	3	12	32
G9424035	3.5	3.5	12	32
G9424040	4.0	4	12	40
G9424045	4.5	4.5	14	50
G9424050	5.0	5	14	50
G9424055	5.5	5.5	16	50
G9424060	6.0	6	16	50
G9424070	7.0	7	20	60
G9424080	8.0	8	20	60
G9424090	9.0	9	20	60
G9424100	10.0	10	22	70
G9424120	12.0	12	22	70
G9424140	14.0	14	25	75
G9424160	16.0	16	25	75
G9424200	20.0	20	32	100

Mill Dia. Tolerance (mm)	Shank Dia. Tolerance
0 ~ -0.03	h5

◎ : Excellent ○ : Good

ISO Material Description	P										M				K						
	Non-alloy steel					Low alloy steel					High alloyed steel, and tool steel		Stainless steel		Grey cast iron		Nodular cast iron		Malleable cast iron		
VDI 3323	1	2	3	4	5	6	7	8	9	10	11	12	13	14	15	16	17	18	19	20	
HRc	13	25	28	32	10	29	32	38	15	35	15	23	10	10	26	3	25		21		
HB	125	190	250	270	300	180	275	300	350	200	325	200	240	180	180	260	160	250	130	230	
Recommended	◎	◎	◎	◎	◎	◎	◎	◎	◎	◎	◎	○	○	○	○	○	○	○	○	○	
ISO Material Description	N					S					H										
	Aluminum-wrought alloy		Aluminum-cast, alloyed			Copper and Copper Alloys (Bronze / Brass)			Non Metallic Materials		Heat Resistant Super Alloys				Titanium Alloys		Hardened steel	Chilled Cast Iron	Hardened Cast Iron		
VDI 3323	21	22	23	24	25	26	27	28	29	30	31	32	33	34	35	36	37	38	39	40	41
HRc											15	30	25	38	34			55	60	42	55
HB	60	100	75	90	130	110	90	100			200	280	250	350	320	400 Rm	1050 Rm	550	630	400	550
Recommended	○	○	○	○	○	○	○	○	○	○	○	○	○	○	○	○	○			○	

# TiAIN-COATED SOLID CARBIDE END MILLS 2 FLUTE SHORT LENGTH WITH CHAMFER

**G9G44** PLAIN SHANK


- ▶ Suitable for dry milling applications at high temperatures.
- ▶ Excellent high-performance end mills.
- ▶ 2 flute design for slotting.



Unit : mm

EDP No.	Mill Diameter	Shank Diameter	Length of Cut	Overall Length	Chamfer
<b>G9G44030</b>	<b>3.0</b>	3	12	32	0.10
<b>G9G44040</b>	<b>4.0</b>	4	12	40	0.10
<b>G9G44050</b>	<b>5.0</b>	5	14	50	0.10
<b>G9G44060</b>	<b>6.0</b>	6	16	50	0.10
<b>G9G44080</b>	<b>8.0</b>	8	20	60	0.13
<b>G9G44100</b>	<b>10.0</b>	10	22	70	0.13
<b>G9G44120</b>	<b>12.0</b>	12	22	70	0.18
<b>G9G44140</b>	<b>14.0</b>	14	25	75	0.18
<b>G9G44160</b>	<b>16.0</b>	16	25	75	0.18
<b>G9G44200</b>	<b>20.0</b>	20	32	100	0.23

Mill Dia. Tolerance (mm)	Shank Dia. Tolerance
0 ~ - 0.03	h5

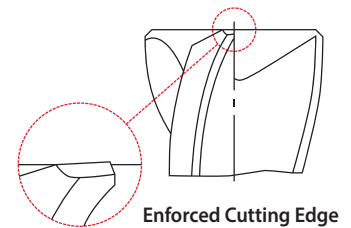

◎ : Excellent ○ : Good


ISO Material Description	P										M				K						
	Non-alloy steel					Low alloy steel					High alloyed steel, and tool steel		Stainless steel		Grey cast iron		Nodular cast iron		Malleable cast iron		
VDI 3323	1	2	3	4	5	6	7	8	9	10	11	12	13	14	15	16	17	18	19	20	
HRc		13	25	28	32	10	29	32	38	15	35	15	23	10	10	26	3	25		21	
HB	125	190	250	270	300	180	275	300	350	200	325	200	240	180	180	260	160	250	130	230	
Recommended	◎	◎	◎	◎	◎	◎	◎	◎	◎	◎	◎	○	○	○	○	○	○	○	○	○	
ISO Material Description	N					S					H										
	Aluminum-wrought alloy		Aluminum-cast, alloyed			Copper and Copper Alloys (Bronze / Brass)		Non Metallic Materials			Heat Resistant Super Alloys					Titanium Alloys		Hardened steel	Chilled Cast Iron	Hardened Cast Iron	
VDI 3323	21	22	23	24	25	26	27	28	29	30	31	32	33	34	35	36	37	38	39	40	41
HRc											15	30	25	38	34			55	60	42	55
HB	60	100	75	90	130	110	90	100			200	280	250	350	320	400 Rm	1050 Rm	550	630	400	550
Recommended	○	○	○	○	○	○	○	○	○	○	○	○	○	○	○	○	○			○	



**TiAIN-COATED SOLID CARBIDE END MILLS  
2 FLUTE SHORT LENGTH**

**G9A68 PLAIN SHANK**

- ▶ Suitable for dry milling applications at high temperatures.
- ▶ Excellent high-performance end mills.
- ▶ 2 flute design for slotting.



CARBIDE
2
30°
DIN 6535HA
P.63

Unit : mm

EDP No.	Mill Diameter	Shank Diameter	Length of Cut	Overall Length
G9A68010	1.0	3	3	39
G9A68015	1.5	3	5	39
G9A68020	2.0	3	7	39
G9A68025	2.5	3	7	39
G9A68030	3.0	3	9	39
G9A68040	4.0	4	14	51
G9A68050	5.0	5	16	51
G9A68060	6.0	6	19	64
G9A68080	8.0	8	21	64
G9A68100	10.0	10	22	70
G9A68120	12.0	12	25	76
G9A68160	16.0	16	32	89
G9A68200	20.0	20	38	102

Mill Dia. Tolerance (mm)	Shank Dia. Tolerance
0 ~ - 0.03	h5



◎ : Excellent ○ : Good

ISO Material Description	P										M				K						
	Non-alloy steel					Low alloy steel					High alloyed steel, and tool steel		Stainless steel		Grey cast iron		Nodular cast iron		Malleable cast iron		
VDI 3323	1	2	3	4	5	6	7	8	9	10	11	12	13	14	15	16	17	18	19	20	
HRc		13	25	28	32	10	29	32	38	15	35	15	23	10	10	26	3	25		21	
HB	125	190	250	270	300	180	275	300	350	200	325	200	240	180	180	260	160	250	130	230	
Recommended	◎	◎	◎	◎	◎	◎	◎	◎	◎	◎	◎	○	○	○	○	○	○	○	○	○	
ISO Material Description	N					S					H										
	Aluminum-wrought alloy		Aluminum-cast, alloyed			Copper and Copper Alloys (Bronze / Brass)		Non Metallic Materials			Heat Resistant Super Alloys			Titanium Alloys		Hardened steel	Chilled Cast Iron	Hardened Cast Iron			
VDI 3323	21	22	23	24	25	26	27	28	29	30	31	32	33	34	35	36	37	38	39	40	41
HRc											15	30	25	38	34			55	60	42	55
HB	60	100	75	90	130	110	90	100			200	280	250	350	320	400 Rm	1050 Rm	550	630	400	550
Recommended	○	○	○	○	○	○	○	○	○	○	○	○	○	○	○	○	○			○	

# TiAIN-COATED SOLID CARBIDE END MILLS 2 FLUTE SHORT LENGTH

**G9444** FLAT SHANK

- ▶ Suitable for dry milling applications at high temperatures.
- ▶ Excellent high-performance end mills.
- ▶ 2 flute design for slotting.



Unit : mm

EDP No.	Mill Diameter	Shank Diameter	Length of Cut	Overall Length
G9444020	2.0	6	3	50
G9444030	3.0	6	4	50
G9444035	3.5	6	4	50
G9444040	4.0	6	5	54
G9444045	4.5	6	5	54
G9444050	5.0	6	6	54
G9444060	6.0	6	7	54
G9444070	7.0	8	8	58
G9444080	8.0	8	9	58
G9444090	9.0	10	10	66
G9444100	10.0	10	11	66
G9444120	12.0	12	12	73
G9444140	14.0	14	14	75
G9444160	16.0	16	16	82
G9444180	18.0	18	18	84
G9444200	20.0	20	20	92

Mill Dia. Tolerance (mm)	Shank Dia. Tolerance
0 ~ - 0.03	h5



◎ : Excellent ○ : Good

ISO Material Description	P										M				K						
	Non-alloy steel					Low alloy steel					High alloyed steel, and tool steel		Stainless steel		Grey cast iron		Nodular cast iron		Malleable cast iron		
VDI 3323	1	2	3	4	5	6	7	8	9	10	11	12	13	14	15	16	17	18	19	20	
HRc		13	25	28	32	10	29	32	38	15	35	15	23	10	10	26	3	25		21	
HB	125	190	250	270	300	180	275	300	350	200	325	200	240	180	180	260	160	250	130	230	
Recommended	◎	◎	◎	◎	◎	◎	◎	◎	◎	◎	◎	○	○	○	○	○	○	○	○	○	
ISO Material Description	N					S					H										
	Aluminum-wrought alloy		Aluminum-cast, alloyed			Copper and Copper Alloys (Bronze / Brass)			Non Metallic Materials		Heat Resistant Super Alloys					Titanium Alloys		Hardened steel	Chilled Cast Iron	Hardened Cast Iron	
VDI 3323	21	22	23	24	25	26	27	28	29	30	31	32	33	34	35	36	37	38	39	40	41
HRc											15	30	25	38	34			55	60	42	55
HB	60	100	75	90	130	110	90	100			200	280	250	350	320	400 Rm	1050 Rm	550	630	400	550
Recommended	○	○	○	○	○	○	○	○	○	○	○	○	○	○	○	○	○	○	○	○	○

## TiAIN-COATED SOLID CARBIDE END MILLS 2 FLUTE LONG LENGTH

### G9527 PLAIN SHANK

- ▶ Suitable for dry milling applications at high temperatures.
- ▶ Excellent high-performance end mills.
- ▶ 2 flute design for slotting.



Unit : mm

EDP No.	Mill Diameter	Shank Diameter	Length of Cut	Overall Length
G9527035	3.5	3.5	7	50
G9527040	4.0	4	8	50
G9527045	4.5	4.5	8	50
G9527050	5.0	5	10	50
G9527055	5.5	5.5	10	57
G9527060	6.0	6	10	57
G9527065	6.5	6.5	13	60
G9527070	7.0	7	13	60
G9527075	7.5	7.5	16	63
G9527080	8.0	8	16	63
G9527085	8.5	8.5	16	67
G9527090	9.0	9	16	67
G9527095	9.5	9.5	19	72
G9527100	10.0	10	19	72
G9527110	11.0	11	22	83
G9527120	12.0	12	22	83
G9527130	13.0	13	22	83
G9527140	14.0	14	22	83
G9527150	15.0	15	26	92
G9527160	16.0	16	26	92
G9527180	18.0	18	26	92
G9527200	20.0	20	32	104

Mill Dia. Tolerance (mm)	Shank Dia. Tolerance
0 ~ - 0.03	h5


◎ : Excellent ○ : Good

ISO Material Description	P										M				K						
	Non-alloy steel					Low alloy steel					High alloyed steel, and tool steel		Stainless steel		Grey cast iron		Nodular cast iron		Malleable cast iron		
VDI 3323	1	2	3	4	5	6	7	8	9	10	11	12	13	14	15	16	17	18	19	20	
HRc	13	25	28	32	10	29	32	38	15	35	15	23	10	10	26	3	25		21		
HB	125	190	250	270	300	180	275	300	350	200	325	200	240	180	180	260	160	250	130	230	
Recommended	◎	◎	◎	◎	◎	◎	◎	◎	◎	◎	◎	○	○	○	○	○	○	○	○	○	
ISO Material Description	N										S						H				
	Aluminum-wrought alloy		Aluminum-cast, alloyed			Copper and Copper Alloys (Bronze / Brass)			Non Metallic Materials		Heat Resistant Super Alloys						Titanium Alloys		Hardened steel	Chilled Cast Iron	Hardened Cast Iron
VDI 3323	21	22	23	24	25	26	27	28	29	30	31	32	33	34	35	36	37	38	39	40	41
HRc											15	30	25	38	34			55	60	42	55
HB	60	100	75	90	130	110	90	100			200	280	250	350	320	400 Rm	1050 Rm	550	630	400	550
Recommended	○	○	○	○	○	○	○	○	○	○	○	○	○	○	○	○	○			○	

# TiAIN-COATED SOLID CARBIDE END MILLS 2 FLUTE LONG LENGTH

**G9445** FLAT SHANK

- Suitable for dry milling applications at high temperatures.
- Excellent high-performance end mills.
- 2 flute design for slotting.



Unit : mm

EDP No.	Mill Diameter	Shank Diameter	Length of Cut	Overall Length
G9445901	2.0	● 3	6	38
G9445028	2.8	6	7	57
G9445030	3.0	6	7	57
G9445035	3.5	6	7	57
G9445038	3.8	6	8	57
G9445040	4.0	6	8	57
G9445045	4.5	6	8	57
G9445048	4.8	6	10	57
G9445050	5.0	6	10	57
G9445957	5.8	6	10	57
G9445060	6.0	6	10	57
G9445967	6.8	8	13	63
G9445070	7.0	8	13	63
G9445977	7.8	8	16	63
G9445080	8.0	8	16	63
G9445087	8.7	10	16	72
G9445090	9.0	10	16	72
G9445097	9.7	10	19	72
G9445100	10.0	10	19	72
G9445117	11.7	12	22	83
G9445120	12.0	12	22	83

● with plain shank  
► NEXT PAGE

Mill Dia. Tolerance (mm)	Shank Dia. Tolerance
0 ~ - 0.03	h5


◎ : Excellent ○ : Good

ISO Material Description	P										M				K						
	Non-alloy steel					Low alloy steel					High alloyed steel, and tool steel		Stainless steel		Grey cast iron		Nodular cast iron		Malleable cast iron		
VDI 3323	1	2	3	4	5	6	7	8	9	10	11	12	13	14	15	16	17	18	19	20	
HRc	13	25	28	32	10	29	32	38	15	35	15	23	10	10	26	3	25		21		
HB	125	190	250	270	300	180	275	300	350	200	325	200	240	180	180	260	160	250	130	230	
Recommended	◎	◎	◎	◎	◎	◎	◎	◎	◎	◎	◎	○	○	○	○	○	○	○	○	○	
ISO Material Description	N					S					H										
	Aluminum-wrought alloy		Aluminum-cast, alloyed			Copper and Copper Alloys (Bronze / Brass)			Non Metallic Materials		Heat Resistant Super Alloys					Titanium Alloys		Hardened steel		Chilled Cast Iron	Hardened Cast Iron
VDI 3323	21	22	23	24	25	26	27	28	29	30	31	32	33	34	35	36	37	38	39	40	41
HRc											15	30	25	38	34			55	60	42	55
HB	60	100	75	90	130	110	90	100			200	280	250	350	320	400 Rm	1050 Rm	550	630	400	550
Recommended	○	○	○	○	○	○	○	○	○	○	○	○	○	○	○	○	○	○	○	○	○

**TiAIN-COATED SOLID CARBIDE END MILLS  
2 FLUTE LONG LENGTH**

**G9445 FLAT SHANK**

- ▶ Suitable for dry milling applications at high temperatures.
- ▶ Excellent high-performance end mills.
- ▶ 2 flute design for slotting.



CARBIDE
DIN 6527
2
≈ 30°
DIN 6535HA
DIN 6535HB
P.63

Unit : mm

EDP No.	Mill Diameter	Shank Diameter	Length of Cut	Overall Length
<b>G9445137</b>	<b>13.7</b>	14	22	83
<b>G9445140</b>	<b>14.0</b>	14	22	83
<b>G9445157</b>	<b>15.7</b>	16	26	92
<b>G9445160</b>	<b>16.0</b>	16	26	92
<b>G9445177</b>	<b>17.7</b>	18	26	92
<b>G9445180</b>	<b>18.0</b>	18	26	92
<b>G9445197</b>	<b>19.7</b>	20	32	104
<b>G9445200</b>	<b>20.0</b>	20	32	104

Mill Dia. Tolerance (mm)	Shank Dia. Tolerance
0 ~ - 0.03	h5


◎ : Excellent ○ : Good

ISO Material Description	P										M				K						
	Non-alloy steel					Low alloy steel					High alloyed steel, and tool steel		Stainless steel		Grey cast iron		Nodular cast iron		Malleable cast iron		
VDI 3323	1	2	3	4	5	6	7	8	9	10	11	12	13	14	15	16	17	18	19	20	
HRc	13	25	28	32	32	10	29	32	38	15	35	15	23	10	10	26	3	25		21	
HB	125	190	250	270	300	180	275	300	350	200	325	200	240	180	180	260	160	250	130	230	
Recommended	◎	◎	◎	◎	◎	◎	◎	◎	◎	◎	◎	○	○	○	○	○	○	○	○	○	
ISO Material Description	N					S					H										
	Aluminum- wrought alloy		Aluminum-cast, alloyed			Copper and Copper Alloys (Bronze / Brass)			Non Metallic Materials		Heat Resistant Super Alloys					Titanium Alloys		Hardened steel	Chilled Cast Iron	Hardened Cast Iron	
VDI 3323	21	22	23	24	25	26	27	28	29	30	31	32	33	34	35	36	37	38	39	40	41
HRc											15	30	25	38	34			55	60	42	55
HB	60	100	75	90	130	110	90	100			200	280	250	350	320	400 Rm	1050 Rm	550	630	400	550
Recommended	○	○	○	○	○	○	○	○	○	○	○	○	○	○	○	○	○			○	

# TiAIN-COATED SOLID CARBIDE END MILLS 2 FLUTE LONG LENGTH WITH CHAMFER

**G9G45** FLAT SHANK


- ▶ Suitable for dry milling applications at high temperatures.
- ▶ Excellent high-performance end mills.
- ▶ 2 flute design for slotting.

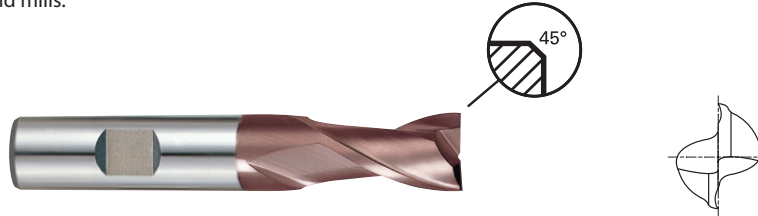

Unit : mm

EDP No.	Mill Diameter	Shank Diameter	Length of Cut	Overall Length	Chamfer
<b>G9G45030</b>	<b>3.0</b>	6	7	57	0.10
<b>G9G45040</b>	<b>4.0</b>	6	8	57	0.10
<b>G9G45050</b>	<b>5.0</b>	6	10	57	0.10
<b>G9G45060</b>	<b>6.0</b>	6	10	57	0.10
<b>G9G45080</b>	<b>8.0</b>	8	16	63	0.13
<b>G9G45100</b>	<b>10.0</b>	10	19	72	0.13
<b>G9G45120</b>	<b>12.0</b>	12	22	83	0.18
<b>G9G45140</b>	<b>14.0</b>	14	22	83	0.18
<b>G9G45160</b>	<b>16.0</b>	16	26	92	0.18
<b>G9G45200</b>	<b>20.0</b>	20	32	104	0.23

Mill Dia. Tolerance (mm)	Shank Dia. Tolerance
0 ~ - 0.03	h5

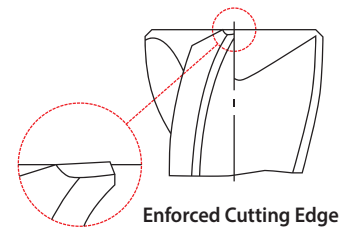


◎ : Excellent ○ : Good

ISO Material Description	P										M				K						
	Non-alloy steel					Low alloy steel					High alloyed steel, and tool steel		Stainless steel		Grey cast iron		Nodular cast iron		Malleable cast iron		
VDI 3323	1	2	3	4	5	6	7	8	9	10	11	12	13	14	15	16	17	18	19	20	
HRc		13	25	28	32	10	29	32	38	15	35	15	23	10	10	26	3	25		21	
HB	125	190	250	270	300	180	275	300	350	200	325	200	240	180	180	260	160	250	130	230	
Recommended	◎	◎	◎	◎	◎	◎	◎	◎	◎	◎	◎	○	○	○	○	○	○	○	○	○	
ISO Material Description	N					S					H										
	Aluminum-wrought alloy		Aluminum-cast, alloyed			Copper and Copper Alloys (Bronze / Brass)			Non Metallic Materials		Heat Resistant Super Alloys					Titanium Alloys		Hardened steel	Chilled Cast Iron	Hardened Cast Iron	
VDI 3323	21	22	23	24	25	26	27	28	29	30	31	32	33	34	35	36	37	38	39	40	41
HRc											15	30	25	38	34			55	60	42	55
HB	60	100	75	90	130	110	90	100			200	280	250	350	320	400 Rm	1050 Rm	550	630	400	550
Recommended	○	○	○	○	○	○	○	○	○	○	○	○	○	○	○	○	○	○	○	○	○

**TiAIN-COATED SOLID CARBIDE END MILLS  
2 FLUTE EXTRA LONG LENGTH**

**G9452 PLAIN SHANK**

- ▶ Suitable for dry milling applications at high temperatures.
- ▶ Excellent high-performance end mills.
- ▶ 2 flute design for slotting.



CARBIDE
2
30°
DIN 6535HA
P.63

Unit : mm

EDP No.	Mill Diameter	Shank Diameter	Length of Cut	Overall Length
G9452903	3.0	3	20	60
G9452030	3.0	3	30	75
G9452904	4.0	4	20	60
G9452040	4.0	4	30	75
G9452905	5.0	5	25	75
G9452050	5.0	5	40	100
G9452906	6.0	6	30	75
G9452060	6.0	6	50	150
G9452908	8.0	8	30	75
G9452080	8.0	8	50	150
G9452910	10.0	10	40	100
G9452100	10.0	10	60	150
G9452912	12.0	12	45	100
G9452120	12.0	12	75	150
G9452914	14.0	14	45	100
G9452140	14.0	14	65	150
G9452916	16.0	16	45	100
G9452160	16.0	16	65	150
G9452918	18.0	18	45	100
G9452180	18.0	18	65	150
G9452920	20.0	20	45	100
G9452200	20.0	20	65	150

Mill Dia. Tolerance (mm)	Shank Dia. Tolerance
0 ~ - 0.03	h5



◎ : Excellent ○ : Good

ISO Material Description	P										M				K						
	Non-alloy steel					Low alloy steel					High alloyed steel, and tool steel		Stainless steel		Grey cast iron		Nodular cast iron		Malleable cast iron		
VDI 3323	1	2	3	4	5	6	7	8	9	10	11	12	13	14	15	16	17	18	19	20	
HRc	13	25	28	32	10	29	32	38	15	35	15	23	10	10	26	3	25		21		
HB	125	190	250	270	300	180	275	300	350	200	325	200	240	180	180	260	160	250	130	230	
Recommended	◎	◎	◎	◎	◎	◎	◎	◎	◎	◎	◎	○	○	○	○	○	○	○	○	○	
ISO Material Description	N										S						H				
	Aluminum- wrought alloy		Aluminum-cast, alloyed			Copper and Copper Alloys (Bronze / Brass)		Non Metallic Materials			Heat Resistant Super Alloys				Titanium Alloys		Hardened steel	Chilled Cast Iron	Hardened Cast Iron		
VDI 3323	21	22	23	24	25	26	27	28	29	30	31	32	33	34	35	36	37	38	39	40	41
HRc											15	30	25	38	34			55	60	42	55
HB	60	100	75	90	130	110	90	100			200	280	250	350	320	400 Rm	1050 Rm	550	630	400	550
Recommended	○	○	○	○	○	○	○	○	○	○	○	○	○	○	○	○	○	○	○	○	○

# TiAIN-COATED SOLID CARBIDE END MILLS 2 FLUTE RIB PROCESSING

## G9B80 PLAIN SHANK

- Suitable for dry milling applications at high temperatures.
- Excellent high-performance end mills.
- 2 flute design for slotting.



Unit : mm

EDP No.	Mill Diameter	Shank Diameter	Length of Cut	Length Below Shank	Overall Length	Neck Diameter
	D1	D2	L1	L3	L2	D3
G9B80004	0.4	4	0.7	2	50	0.37
G9B80901	0.4	4	0.7	4	50	0.37
G9B80005	0.5	4	0.75	2	50	0.45
G9B80902	0.5	4	0.75	4	50	0.45
G9B80903	0.5	4	0.75	6	50	0.45
G9B80006	0.6	4	0.9	2	50	0.55
G9B80904	0.6	4	0.9	4	50	0.55
G9B80905	0.6	4	0.9	6	50	0.55
G9B80007	0.7	4	1.1	4	50	0.65
G9B80906	0.7	4	1.1	6	50	0.65
G9B80008	0.8	4	1.2	4	50	0.75
G9B80907	0.8	4	1.2	6	50	0.75
G9B80908	0.8	4	1.2	8	50	0.75
G9B80009	0.9	4	1.4	6	50	0.85
G9B80909	0.9	4	1.4	8	50	0.85
G9B80910	0.9	4	1.4	10	50	0.85
G9B80010	1.0	4	1.5	6	50	0.95
G9B80911	1.0	4	1.5	8	50	0.95
G9B80912	1.0	4	1.5	10	50	0.95
G9B80913	1.0	4	1.5	12	50	0.95
G9B80012	1.2	4	1.8	6	50	1.15
G9B80914	1.2	4	1.8	8	50	1.15
G9B80915	1.2	4	1.8	10	50	1.15
G9B80916	1.2	4	1.8	12	50	1.15

► NEXT PAGE

Mill Dia. Tolerance (mm)	Shank Dia. Tolerance
0 ~ - 0.03	h5

◎ : Excellent ○ : Good


ISO Material Description	P										M				K						
	Non-alloy steel					Low alloy steel					High alloyed steel, and tool steel		Stainless steel		Grey cast iron		Nodular cast iron		Malleable cast iron		
VDI 3323	1	2	3	4	5	6	7	8	9	10	11	12	13	14	15	16	17	18	19	20	
HRc	13	25	28	32	32	10	29	32	38	15	35	15	23	10	10	26	3	25		21	
HB	125	190	250	270	300	180	275	300	350	200	325	200	240	180	180	260	160	250	130	230	
Recommended	◎	◎	◎	◎	◎	◎	◎	◎	◎	◎	◎	○	○	○	○	○	○	○	○	○	
ISO Material Description	N				S					H											
	Aluminum-wrought alloy		Aluminum-cast, alloyed		Copper and Copper Alloys (Bronze / Brass)			Non Metallic Materials		Heat Resistant Super Alloys				Titanium Alloys		Hardened steel		Chilled Cast Iron		Hardened Cast Iron	
VDI 3323	21	22	23	24	25	26	27	28	29	30	31	32	33	34	35	36	37	38	39	40	41
HRc											15	30	25	38	34			55	60	42	55
HB	60	100	75	90	130	110	90	100			200	280	250	350	320	400 Rm	1050 Rm	550	630	400	550
Recommended	○	○	○	○	○	○	○	○													



**TiAIN-COATED SOLID CARBIDE END MILLS  
2 FLUTE RIB PROCESSING**

**G9B80 PLAIN SHANK**

- ▶ Suitable for dry milling applications at high temperatures.
- ▶ Excellent high-performance end mills.
- ▶ 2 flute design for slotting.

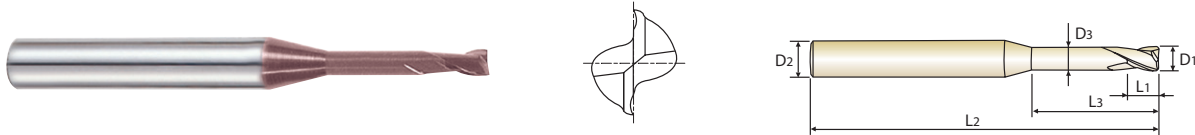

Unit : mm

EDP No.	Mill Diameter	Shank Diameter	Length of Cut	Length Below Shank	Overall Length	Neck Diameter
	D1	D2	L1	L3	L2	D3
G9B80015	1.5	4	2.3	6	50	1.45
G9B80917	1.5	4	2.3	8	50	1.45
G9B80918	1.5	4	2.3	10	50	1.45
G9B80919	1.5	4	2.3	12	50	1.45
G9B80920	1.5	4	2.3	14	50	1.45
G9B80921	1.5	4	2.3	16	50	1.45
G9B80922	1.5	4	2.3	18	50	1.45
G9B80923	1.5	4	2.3	20	50	1.45
G9B80020	2.0	4	3	6	50	1.95
G9B80924	2.0	4	3	8	50	1.95
G9B80925	2.0	4	3	10	50	1.95
G9B80926	2.0	4	3	12	50	1.95
G9B80927	2.0	4	3	14	50	1.95
G9B80928	2.0	4	3	16	50	1.95
G9B80929	2.0	4	3	18	50	1.95
G9B80930	2.0	4	3	20	50	1.95
G9B80025	2.5	4	3.7	8	50	2.40
G9B80931	2.5	4	3.7	12	50	2.40
G9B80932	2.5	4	3.7	16	50	2.40
G9B80933	2.5	4	3.7	20	50	2.40
G9B80030	3.0	6	4.5	8	50	2.85
G9B80934	3.0	6	4.5	12	50	2.85
G9B80935	3.0	6	4.5	16	60	2.85
G9B80936	3.0	6	4.5	20	60	2.85

▶ NEXT PAGE

Mill Dia. Tolerance (mm)	Shank Dia. Tolerance
0 ~ - 0.03	h5



◎ : Excellent ○ : Good

ISO Material Description	P										M				K						
	Non-alloy steel					Low alloy steel					High alloyed steel, and tool steel		Stainless steel		Grey cast iron		Nodular cast iron		Malleable cast iron		
VDI 3323	1	2	3	4	5	6	7	8	9	10	11	12	13	14	15	16	17	18	19	20	
HRc	13	25	28	32	32	10	29	32	38	15	35	15	23	10	10	26	3	25		21	
HB	125	190	250	270	300	180	275	300	350	200	325	200	240	180	180	260	160	250	130	230	
Recommended	◎	◎	◎	◎	◎	◎	◎	◎	◎	◎	◎	○	○	○	○	○	○	○	○	○	
ISO Material Description	N					S					H										
	Aluminum-wrought alloy		Aluminum-cast, alloyed			Copper and Copper Alloys (Bronze / Brass)			Non Metallic Materials		Heat Resistant Super Alloys					Titanium Alloys		Hardened steel	Chilled Cast Iron	Hardened Cast Iron	
VDI 3323	21	22	23	24	25	26	27	28	29	30	31	32	33	34	35	36	37	38	39	40	41
HRc											15	30	25	38	34			55	60	42	55
HB	60	100	75	90	130	110	90	100			200	280	250	350	320	400 Rm	1050 Rm	550	630	400	550
Recommended	○	○	○	○	○	○	○	○													

# TiAIN-COATED SOLID CARBIDE END MILLS 2 FLUTE RIB PROCESSING

## G9B80 PLAIN SHANK

- ▶ Suitable for dry milling applications at high temperatures.
- ▶ Excellent high-performance end mills.
- ▶ 2 flute design for slotting.



Unit : mm

EDP No.	Mill Diameter	Shank Diameter	Length of Cut	Length Below Shank	Overall Length	Neck Diameter
	D1	D2	L1	L3	L2	D3
<b>G9B80937</b>	<b>3.0</b>	6	4.5	25	75	2.85
<b>G9B80040</b>	<b>4.0</b>	6	6	12	50	3.85
<b>G9B80938</b>	<b>4.0</b>	6	6	16	60	3.85
<b>G9B80939</b>	<b>4.0</b>	6	6	20	75	3.85
<b>G9B80940</b>	<b>4.0</b>	6	6	25	75	3.85
<b>G9B80941</b>	<b>4.0</b>	6	6	30	75	3.85
<b>G9B80942</b>	<b>4.0</b>	6	6	35	75	3.85

Mill Dia. Tolerance (mm)	Shank Dia. Tolerance
0 ~ - 0.03	h5


◎ : Excellent ○ : Good

ISO Material Description	P										M				K						
	Non-alloy steel					Low alloy steel					High alloyed steel, and tool steel	Stainless steel			Grey cast iron	Nodular cast iron		Malleable cast iron			
VDI 3323	1	2	3	4	5	6	7	8	9	10	11	12	13	14	15	16	17	18	19	20	
HRc		13	25	28	32	10	29	32	38	15	35	15	23	10	10	26	3	25		21	
HB	125	190	250	270	300	180	275	300	350	200	325	200	240	180	180	260	160	250	130	230	
Recommended	◎	◎	◎	◎	◎	◎	◎	◎	◎	◎	◎	○	○	○	○	○	○	○	○	○	
ISO Material Description	N					S					H										
	Aluminum-wrought alloy		Aluminum-cast, alloyed			Copper and Copper Alloys (Bronze / Brass)		Non Metallic Materials			Heat Resistant Super Alloys					Titanium Alloys		Hardened steel	Chilled Cast Iron	Hardened Cast Iron	
VDI 3323	21	22	23	24	25	26	27	28	29	30	31	32	33	34	35	36	37	38	39	40	41
HRc											15	30	25	38	34			55	60	42	55
HB	60	100	75	90	130	110	90	100			200	280	250	350	320	400 Rm	1050 Rm	550	630	400	550
Recommended	○	○	○	○	○	○	○	○													

## TiAIN-COATED SOLID CARBIDE END MILLS 3 FLUTE SHORT LENGTH THROW AWAY

**G9553** PLAIN SHANK  
**G9410** FLAT SHANK

- ▶ Suitable for dry milling applications at high temperatures.
- ▶ Excellent high-performance end mills.
- ▶ 3 flute design combines the advantage of 2 flute and 4 flute end mill.



Unit : mm

EDP No.		Mill Diameter	Shank Diameter	Length of Cut	Overall Length
PLAIN	FLAT				
<b>G9553005</b>	-	<b>0.5</b>	3	1.5	38
<b>G9553006</b>	-	<b>0.6</b>	3	1.5	38
<b>G9553008</b>	-	<b>0.8</b>	3	2	38
<b>G9553010</b>	-	<b>1.0</b>	3	2	38
<b>G9553012</b>	-	<b>1.2</b>	3	2	38
<b>G9553015</b>	-	<b>1.5</b>	3	2	38
<b>G9553018</b>	-	<b>1.8</b>	3	2	38
-	<b>G9410020</b>	<b>2.0</b>	6	4	35
-	<b>G9410025</b>	<b>2.5</b>	6	5	36
-	<b>G9410030</b>	<b>3.0</b>	6	5	36
-	<b>G9410035</b>	<b>3.5</b>	6	6	37
-	<b>G9410040</b>	<b>4.0</b>	6	7	38
-	<b>G9410045</b>	<b>4.5</b>	6	8	38
-	<b>G9410050</b>	<b>5.0</b>	6	8	39
-	<b>G9410055</b>	<b>5.5</b>	6	8	39
-	<b>G9410957</b>	<b>5.8</b>	6	8	39
-	<b>G9410060</b>	<b>6.0</b>	6	8	39
-	<b>G9410967</b>	<b>6.8</b>	8	10	42
-	<b>G9410070</b>	<b>7.0</b>	8	10	42
-	<b>G9410977</b>	<b>7.8</b>	8	10	42
-	<b>G9410080</b>	<b>8.0</b>	8	11	43
-	<b>G9410087</b>	<b>8.7</b>	10	11	48
-	<b>G9410090</b>	<b>9.0</b>	10	11	48
-	<b>G9410097</b>	<b>9.7</b>	10	11	48

▶ NEXT PAGE

Mill Dia. Tolerance (mm)	Shank Dia. Tolerance
0 ~ - 0.03	h5


◎ : Excellent ○ : Good

ISO Material Description	P										M				K						
	Non-alloy steel					Low alloy steel					High alloyed steel, and tool steel	Stainless steel			Grey cast iron		Nodular cast iron		Malleable cast iron		
VDI 3323	1	2	3	4	5	6	7	8	9	10	11	12	13	14	15	16	17	18	19	20	
HRc	13	25	28	32	10	29	32	38	15	35	15	23	10	10	26	3	25		21		
HB	125	190	250	270	300	180	275	300	350	200	325	200	240	180	180	260	160	250	130	230	
Recommended	◎	◎	◎	◎	◎	◎	◎	◎	◎	◎	◎	○	○	○	○	○	○	○	○	○	
ISO Material Description	N					S					H										
	Aluminum-wrought alloy		Aluminum-cast, alloyed			Copper and Copper Alloys (Bronze / Brass)			Non Metallic Materials		Heat Resistant Super Alloys					Titanium Alloys		Hardened steel	Chilled Cast Iron	Hardened Cast Iron	
VDI 3323	21	22	23	24	25	26	27	28	29	30	31	32	33	34	35	36	37	38	39	40	41
HRc											15	30	25	38	34			55	60	42	55
HB	60	100	75	90	130	110	90	100			200	280	250	350	320	400 Rm	1050 Rm	550	630	400	550
Recommended	○	○	○	○	○	○	○	○	○	○	○	○	○	○	○	○	○	○	○	○	○

## TiAIN-COATED SOLID CARBIDE END MILLS 3 FLUTE SHORT LENGTH THROW AWAY

**G9553** PLAIN SHANK  
**G9410** FLAT SHANK

- ▶ Suitable for dry milling applications at high temperatures.
- ▶ Excellent high-performance end mills.
- ▶ 3 flute design combines the advantage of 2 flute and 4 flute end mill.



Unit : mm

EDP No.		Mill Diameter	Shank Diameter	Length of Cut	Overall Length
PLAIN	FLAT				
-	<b>G9410100</b>	<b>10.0</b>	10	13	50
-	<b>G9410120</b>	<b>12.0</b>	12	15	55
-	<b>G9410140</b>	<b>14.0</b>	14	15	58
-	<b>G9410160</b>	<b>16.0</b>	16	18	62
-	<b>G9410180</b>	<b>18.0</b>	18	20	70
-	<b>G9410200</b>	<b>20.0</b>	20	22	75

Mill Dia. Tolerance (mm)	Shank Dia. Tolerance
0 ~ - 0.03	h5


◎ : Excellent ○ : Good

ISO Material Description	P										M				K						
	Non-alloy steel					Low alloy steel					High alloyed steel, and tool steel		Stainless steel		Grey cast iron		Nodular cast iron		Malleable cast iron		
VDI 3323	1	2	3	4	5	6	7	8	9	10	11	12	13	14	15	16	17	18	19	20	
HRc		13	25	28	32	10	29	32	38	15	35	15	23	10	10	26	3	25		21	
HB	125	190	250	270	300	180	275	300	350	200	325	200	240	180	180	260	160	250	130	230	
Recommended	◎	◎	◎	◎	◎	◎	◎	◎	◎	◎	◎	○	○	○	○	○	○	○	○	○	
ISO Material Description	N					S					H										
	Aluminum-wrought alloy		Aluminum-cast, alloyed			Copper and Copper Alloys (Bronze / Brass)			Non Metallic Materials		Heat Resistant Super Alloys					Titanium Alloys		Hardened steel	Chilled Cast Iron	Hardened Cast Iron	
VDI 3323	21	22	23	24	25	26	27	28	29	30	31	32	33	34	35	36	37	38	39	40	41
HRc											15	30	25	38	34			55	60	42	55
HB	60	100	75	90	130	110	90	100			200	280	250	350	320	400 Rm	1050 Rm	550	630	400	550
Recommended	○	○	○	○	○	○	○	○	○	○	○	○	○	○	○	○	○	○	○	○	○

## TiAIN-COATED SOLID CARBIDE END MILLS 3 FLUTE SHORT LENGTH THROW AWAY WITH CHAMFER

### G9G46 FLAT SHANK


- ▶ Suitable for dry milling applications at high temperatures.
- ▶ Excellent high-performance end mills.
- ▶ 3 flute design combines the advantage of 2 flute and 4 flute end mill.

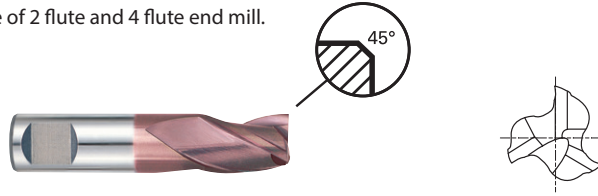

Unit : mm

EDP No.	Mill Diameter	Shank Diameter	Length of Cut	Overall Length	Chamfer
G9G46030	3.0	6	5	36	0.10
G9G46040	4.0	6	7	38	0.10
G9G46050	5.0	6	8	39	0.10
G9G46060	6.0	6	8	39	0.10
G9G46080	8.0	8	11	43	0.13
G9G46100	10.0	10	13	50	0.13
G9G46120	12.0	12	15	55	0.18
G9G46140	14.0	14	15	58	0.18
G9G46160	16.0	16	18	62	0.18
G9G46200	20.0	20	22	75	0.23

Mill Dia. Tolerance (mm)	Shank Dia. Tolerance
0 ~ - 0.03	h5

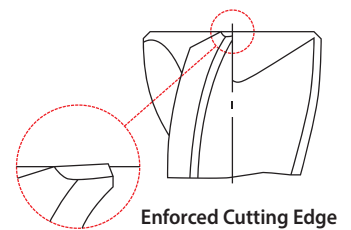


◎ : Excellent ○ : Good

ISO Material Description	P										M				K						
	Non-alloy steel					Low alloy steel					High alloyed steel, and tool steel	Stainless steel			Grey cast iron	Nodular cast iron		Malleable cast iron			
VDI 3323	1	2	3	4	5	6	7	8	9	10	11	12	13	14	15	16	17	18	19	20	
HRc		13	25	28	32	10	29	32	38	15	35	15	23	10	10	26	3	25		21	
HB	125	190	250	270	300	180	275	300	350	200	325	200	240	180	180	260	160	250	130	230	
Recommended	◎	◎	◎	◎	◎	◎	◎	◎	◎	◎	◎	○	○	○	○	○	○	○	○	○	
ISO Material Description	N										S						H				
	Aluminum-wrought alloy		Aluminum-cast, alloyed			Copper and Copper Alloys (Bronze / Brass)			Non Metallic Materials		Heat Resistant Super Alloys						Titanium Alloys		Hardened steel	Chilled Cast Iron	Hardened Cast Iron
VDI 3323	21	22	23	24	25	26	27	28	29	30	31	32	33	34	35	36	37	38	39	40	41
HRc											15	30	25	38	34			55	60	42	55
HB	60	100	75	90	130	110	90	100			200	280	250	350	320	400 Rm	1050 Rm	550	630	400	550
Recommended	○	○	○	○	○	○	○	○	○	○	○	○	○	○	○	○	○			○	

# TiAIN-COATED SOLID CARBIDE END MILLS 3 FLUTE SHORT LENGTH

**G9425** PLAIN SHANK

- ▶ Suitable for dry milling applications at high temperatures.
- ▶ Excellent high-performance end mills.
- ▶ 3 flute design combines the advantage of 2 flute and 4 flute end mill.



Unit : mm

EDP No.	Mill Diameter	Shank Diameter	Length of Cut	Overall Length
G9425010	1.0	4	3	40
G9425015	1.5	4	4.5	40
G9425020	2.0	2	8	32
G9425025	2.5	2.5	8	32
G9425030	3.0	3	12	32
G9425035	3.5	3.5	12	32
G9425040	4.0	4	12	40
G9425045	4.5	4.5	14	50
G9425050	5.0	5	14	50
G9425055	5.5	5.5	16	50
G9425060	6.0	6	16	50
G9425070	7.0	7	20	60
G9425080	8.0	8	20	60
G9425090	9.0	9	20	60
G9425100	10.0	10	22	70
G9425120	12.0	12	22	70
G9425140	14.0	14	25	75
G9425160	16.0	16	25	75
G9425200	20.0	20	32	100

Mill Dia. Tolerance (mm)	Shank Dia. Tolerance
0 ~ - 0.03	h5

◎ : Excellent ○ : Good

ISO Material Description	P										M				K						
	Non-alloy steel					Low alloy steel					High alloyed steel, and tool steel		Stainless steel		Grey cast iron		Nodular cast iron		Malleable cast iron		
VDI 3323	1	2	3	4	5	6	7	8	9	10	11	12	13	14	15	16	17	18	19	20	
HRc	13	25	28	32	10	29	32	38	15	35	15	23	10	10	26	3	25		21		
HB	125	190	250	270	300	180	275	300	350	200	325	200	240	180	180	260	160	250	130	230	
Recommended	◎	◎	◎	◎	◎	◎	◎	◎	◎	◎	◎	○	○	○	○	○	○	○	○	○	
ISO Material Description	N					S					H										
	Aluminum-wrought alloy		Aluminum-cast, alloyed			Copper and Copper Alloys (Bronze / Brass)			Non Metallic Materials		Heat Resistant Super Alloys					Titanium Alloys		Hardened steel		Chilled Cast Iron	Hardened Cast Iron
VDI 3323	21	22	23	24	25	26	27	28	29	30	31	32	33	34	35	36	37	38	39	40	41
HRc											15	30	25	38	34			55	60	42	55
HB	60	100	75	90	130	110	90	100			200	280	250	350	320	400 Rm	1050 Rm	550	630	400	550
Recommended	○	○	○	○	○	○	○	○	○	○	○	○	○	○	○	○	○	○	○	○	○

## TiAIN-COATED SOLID CARBIDE END MILLS 3 FLUTE SHORT LENGTH WITH CHAMFER

### G9G47 PLAIN SHANK


- ▶ Suitable for dry milling applications at high temperatures.
- ▶ Excellent high-performance end mills.
- ▶ 3 flute design combines the advantage of 2 flute and 4 flute end mill.



Unit : mm

EDP No.	Mill Diameter	Shank Diameter	Length of Cut	Overall Length	Chamfer
G9G47030	3.0	3	12	32	0.10
G9G47040	4.0	4	12	40	0.10
G9G47050	5.0	5	14	50	0.10
G9G47060	6.0	6	16	50	0.10
G9G47080	8.0	8	20	60	0.13
G9G47100	10.0	10	22	70	0.13
G9G47120	12.0	12	22	70	0.18
G9G47140	14.0	14	25	75	0.18
G9G47160	16.0	16	25	75	0.18
G9G47200	20.0	20	32	100	0.23

Mill Dia. Tolerance (mm)	Shank Dia. Tolerance
0 ~ - 0.03	h5

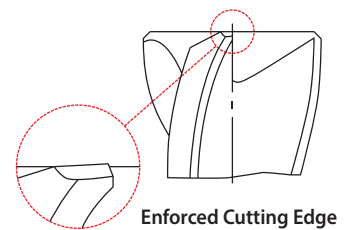



◎ : Excellent ○ : Good

ISO Material Description	P										M				K						
	Non-alloy steel					Low alloy steel					High alloyed steel, and tool steel	Stainless steel			Grey cast iron	Nodular cast iron		Malleable cast iron			
VDI 3323	1	2	3	4	5	6	7	8	9	10	11	12	13	14	15	16	17	18	19	20	
HRc	13	25	28	32	32	10	29	32	38	15	35	15	23	10	10	26	3	25		21	
HB	125	190	250	270	300	180	275	300	350	200	325	200	240	180	180	260	160	250	130	230	
Recommended	◎	◎	◎	◎	◎	◎	◎	◎	◎	◎	◎	○	○	○	○	○	○	○	○	○	
ISO Material Description	N					S					H										
	Aluminum-wrought alloy		Aluminum-cast, alloyed			Copper and Copper Alloys (Bronze / Brass)		Non Metallic Materials			Heat Resistant Super Alloys					Titanium Alloys		Hardened steel	Chilled Cast Iron	Hardened Cast Iron	
VDI 3323	21	22	23	24	25	26	27	28	29	30	31	32	33	34	35	36	37	38	39	40	41
HRc											15	30	25	38	34			55	60	42	55
HB	60	100	75	90	130	110	90	100			200	280	250	350	320	400 Rm	1050 Rm	550	630	400	550
Recommended	○	○	○	○	○	○	○	○	○	○	○	○	○	○	○	○	○			○	

# TiAIN-COATED SOLID CARBIDE END MILLS 3 FLUTE SHORT LENGTH

**G9439** FLAT SHANK

- ▶ Suitable for dry milling applications at high temperatures.
- ▶ Excellent high-performance end mills.
- ▶ 3 flute design combines the advantage of 2 flute and 4 flute end mill.



Unit : mm

EDP No.	Mill Diameter	Shank Diameter	Length of Cut	Overall Length
G9439020	2.0	6	3	50
G9439030	3.0	6	4	50
G9439035	3.5	6	4	50
G9439040	4.0	6	5	54
G9439045	4.5	6	5	54
G9439050	5.0	6	6	54
G9439060	6.0	6	7	54
G9439070	7.0	8	8	58
G9439080	8.0	8	9	58
G9439090	9.0	10	10	66
G9439100	10.0	10	11	66
G9439120	12.0	12	12	73
G9439140	14.0	14	14	75
G9439160	16.0	16	16	82
G9439180	18.0	18	18	84
G9439200	20.0	20	20	92

Mill Dia. Tolerance (mm)	Shank Dia. Tolerance
0 ~ - 0.03	h5

◎ : Excellent ○ : Good



ISO Material Description	P										M				K						
	Non-alloy steel					Low alloy steel					High alloyed steel, and tool steel		Stainless steel		Grey cast iron		Nodular cast iron		Malleable cast iron		
VDI 3323	1	2	3	4	5	6	7	8	9	10	11	12	13	14	15	16	17	18	19	20	
HRc	13	25	28	32	10	29	32	38	15	35	15	23	10	10	26	3	25		21		
HB	125	190	250	270	300	180	275	300	350	200	325	200	240	180	180	260	160	250	130	230	
Recommended	◎	◎	◎	◎	◎	◎	◎	◎	◎	◎	◎	○	○	○	○	○	○	○	○	○	
ISO Material Description	N					S					H										
	Aluminum-wrought alloy		Aluminum-cast, alloyed			Copper and Copper Alloys (Bronze / Brass)			Non Metallic Materials		Heat Resistant Super Alloys					Titanium Alloys		Hardened steel	Chilled Cast Iron	Hardened Cast Iron	
VDI 3323	21	22	23	24	25	26	27	28	29	30	31	32	33	34	35	36	37	38	39	40	41
HRc											15	30	25	38	34			55	60	42	55
HB	60	100	75	90	130	110	90	100			200	280	250	350	320	400 Rm	1050 Rm	550	630	400	550
Recommended	○	○	○	○	○	○	○	○	○	○	○	○	○	○	○	○	○			○	



## TiAIN-COATED SOLID CARBIDE END MILLS 3 FLUTE LONG LENGTH

**G9528** PLAIN SHANK

- ▶ Suitable for dry milling applications at high temperatures.
- ▶ Excellent high-performance end mills.
- ▶ 3 flute design combines the advantage of 2 flute and 4 flute end mill.



Unit : mm

EDP No.	Mill Diameter	Shank Diameter	Length of Cut	Overall Length
G9528035	3.5	3.5	7	50
G9528040	4.0	4	8	50
G9528045	4.5	4.5	8	50
G9528050	5.0	5	10	50
G9528055	5.5	5.5	10	57
G9528060	6.0	6	10	57
G9528065	6.5	6.5	13	60
G9528070	7.0	7	13	60
G9528075	7.5	7.5	16	63
G9528080	8.0	8	16	63
G9528085	8.5	8.5	16	67
G9528090	9.0	9	16	67
G9528095	9.5	9.5	19	72
G9528100	10.0	10	19	72
G9528110	11.0	11	22	83
G9528120	12.0	12	22	83
G9528130	13.0	13	22	83
G9528140	14.0	14	22	83
G9528150	15.0	15	26	92
G9528160	16.0	16	26	92
G9528180	18.0	18	26	92
G9528200	20.0	20	32	104

Mill Dia. Tolerance (mm)	Shank Dia. Tolerance
0 ~ -0.03	h5



◎ : Excellent ○ : Good

ISO Material Description	P										M				K						
	Non-alloy steel					Low alloy steel					High alloyed steel, and tool steel	Stainless steel			Grey cast iron		Nodular cast iron		Malleable cast iron		
VDI 3323	1	2	3	4	5	6	7	8	9	10	11	12	13	14	15	16	17	18	19	20	
HRc	13	25	28	32	10	29	32	38	15	35	15	23	10	10	26	3	25		21		
HB	125	190	250	270	300	180	275	300	350	200	325	200	240	180	180	260	160	250	130	230	
Recommended	◎	◎	◎	◎	◎	◎	◎	◎	◎	◎	◎	○	○	○	○	○	○	○	○	○	
ISO Material Description	N										S						H				
	Aluminum-wrought alloy		Aluminum-cast, alloyed			Copper and Copper Alloys (Bronze / Brass)			Non Metallic Materials		Heat Resistant Super Alloys						Titanium Alloys		Hardened steel	Chilled Cast Iron	Hardened Cast Iron
VDI 3323	21	22	23	24	25	26	27	28	29	30	31	32	33	34	35	36	37	38	39	40	41
HRc											15	30	25	38	34			55	60	42	55
HB	60	100	75	90	130	110	90	100			200	280	250	350	320	400 Rm	1050 Rm	550	630	400	550
Recommended	○	○	○	○	○	○	○	○	○	○	○	○	○	○	○	○	○			○	

# TiAIN-COATED SOLID CARBIDE END MILLS 3 FLUTE LONG LENGTH

**G9433** FLAT SHANK

- ▶ Suitable for dry milling applications at high temperatures.
- ▶ Excellent high-performance end mills.
- ▶ 3 flute design combines the advantage of 2 flute and 4 flute end mill.



Unit : mm

EDP No.	Mill Diameter	Shank Diameter	Length of Cut	Overall Length
G9433030	3.0	6	7	57
G9433040	4.0	6	8	57
G9433050	5.0	6	10	57
G9433060	6.0	6	10	57
G9433080	8.0	8	16	63
G9433090	9.0	10	16	72
G9433100	10.0	10	19	72
G9433120	12.0	12	22	83
G9433140	14.0	14	22	83
G9433160	16.0	16	26	92
G9433180	18.0	18	26	92
G9433200	20.0	20	32	104

Mill Dia. Tolerance (mm)	Shank Dia. Tolerance
0 ~ - 0.03	h5

◎ : Excellent ○ : Good

ISO Material Description	P										M				K						
	Non-alloy steel					Low alloy steel					High alloyed steel, and tool steel		Stainless steel		Grey cast iron		Nodular cast iron		Malleable cast iron		
VDI 3323	1	2	3	4	5	6	7	8	9	10	11	12	13	14	15	16	17	18	19	20	
HRc		13	25	28	32	10	29	32	38	15	35	15	23	10	10	26	3	25		21	
HB	125	190	250	270	300	180	275	300	350	200	325	200	240	180	180	260	160	250	130	230	
Recommended	◎	◎	◎	◎	◎	◎	◎	◎	◎	◎	◎	○	○	○	○	○	○	○	○	○	
ISO Material Description	N					S					H										
	Aluminum-wrought alloy		Aluminum-cast, alloyed			Copper and Copper Alloys (Bronze / Brass)			Non Metallic Materials		Heat Resistant Super Alloys					Titanium Alloys		Hardened steel	Chilled Cast Iron	Hardened Cast Iron	
VDI 3323	21	22	23	24	25	26	27	28	29	30	31	32	33	34	35	36	37	38	39	40	41
HRc											15	30	25	38	34			55	60	42	55
HB	60	100	75	90	130	110	90	100			200	280	250	350	320	400 Rm	1050 Rm	550	630	400	550
Recommended	○	○	○	○	○	○	○	○	○	○	○	○	○	○	○	○	○	○	○	○	○

## TiAIN-COATED SOLID CARBIDE END MILLS 3 FLUTE LONG LENGTH WITH CHAMFER

### G9G48 FLAT SHANK


- ▶ Suitable for dry milling applications at high temperatures.
- ▶ Excellent high-performance end mills.
- ▶ 3 flute design combines the advantage of 2 flute and 4 flute end mill.



Unit : mm

EDP No.	Mill Diameter	Shank Diameter	Length of Cut	Overall Length	Chamfer
G9G48030	3.0	6	7	57	0.10
G9G48040	4.0	6	8	57	0.10
G9G48050	5.0	6	10	57	0.10
G9G48060	6.0	6	10	57	0.10
G9G48080	8.0	8	16	63	0.13
G9G48100	10.0	10	19	72	0.13
G9G48120	12.0	12	22	83	0.18
G9G48140	14.0	14	22	83	0.18
G9G48160	16.0	16	26	92	0.18
G9G48200	20.0	20	32	104	0.23

Mill Dia. Tolerance (mm)	Shank Dia. Tolerance
0 ~ - 0.03	h5

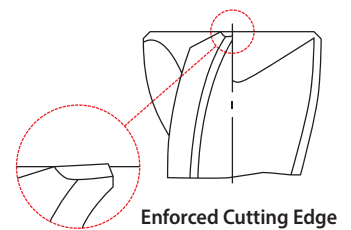


◎ : Excellent ○ : Good

ISO Material Description	P										M				K						
	Non-alloy steel					Low alloy steel					High alloyed steel, and tool steel	Stainless steel			Grey cast iron	Nodular cast iron		Malleable cast iron			
VDI 3323	1	2	3	4	5	6	7	8	9	10	11	12	13	14	15	16	17	18	19	20	
HRc	13	25	28	32	32	10	29	32	38	15	35	15	23	10	10	26	3	25		21	
HB	125	190	250	270	300	180	275	300	350	200	325	200	240	180	180	260	160	250	130	230	
Recommended	◎	◎	◎	◎	◎	◎	◎	◎	◎	◎	◎	○	○	○	○	○	○	○	○	○	
ISO Material Description	N					S					H										
	Aluminum-wrought alloy		Aluminum-cast, alloyed			Copper and Copper Alloys (Bronze / Brass)			Non Metallic Materials		Heat Resistant Super Alloys					Titanium Alloys		Hardened steel	Chilled Cast Iron	Hardened Cast Iron	
VDI 3323	21	22	23	24	25	26	27	28	29	30	31	32	33	34	35	36	37	38	39	40	41
HRc											15	30	25	38	34			55	60	42	55
HB	60	100	75	90	130	110	90	100			200	280	250	350	320	400 Rm	1050 Rm	550	630	400	550
Recommended	○	○	○	○	○	○	○	○	○	○	○	○	○	○	○	○	○			○	

# TiAIN-COATED SOLID CARBIDE END MILLS 3 FLUTE 45° HELIX LONG LENGTH

**G9447** FLAT SHANK

- ▶ Suitable for dry milling applications at high temperatures.
- ▶ Excellent high-performance end mills.



Unit : mm

EDP No.	Mill Diameter	Shank Diameter	Length of Cut	Overall Length
G9447030	3.0	6	7	57
G9447035	3.5	6	7	57
G9447040	4.0	6	8	57
G9447045	4.5	6	8	57
G9447050	5.0	6	10	57
G9447060	6.0	6	10	57
G9447070	7.0	8	13	63
G9447080	8.0	8	16	63
G9447090	9.0	10	16	72
G9447100	10.0	10	19	72
G9447120	12.0	12	22	83
G9447140	14.0	14	22	83
G9447160	16.0	16	26	92
G9447180	18.0	18	26	92
G9447200	20.0	20	32	104

Mill Dia. Tolerance (mm)	Shank Dia. Tolerance
0 ~ - 0.03	h5


◎ : Excellent ○ : Good

ISO Material Description	P										M				K						
	Non-alloy steel					Low alloy steel					High alloyed steel, and tool steel	Stainless steel			Grey cast iron	Nodular cast iron		Malleable cast iron			
VDI 3323	1	2	3	4	5	6	7	8	9	10	11	12	13	14	15	16	17	18	19	20	
HRc		13	25	28	32	10	29	32	38	15	35	15	23	10	10	26	3	25		21	
HB	125	190	250	270	300	180	275	300	350	200	325	200	240	180	180	260	160	250	130	230	
Recommended	◎	◎	◎	◎	◎	◎	◎	◎	◎	◎	◎	○	○	○	○	○	○	○	○	○	
ISO Material Description	N					S					H										
	Aluminum-wrought alloy		Aluminum-cast, alloyed			Copper and Copper Alloys (Bronze / Brass)		Non Metallic Materials			Heat Resistant Super Alloys					Titanium Alloys		Hardened steel	Chilled Cast Iron	Hardened Cast Iron	
VDI 3323	21	22	23	24	25	26	27	28	29	30	31	32	33	34	35	36	37	38	39	40	41
HRc											15	30	25	38	34			55	60	42	55
HB	60	100	75	90	130	110	90	100			200	280	250	350	320	400 Rm	1050 Rm	550	630	400	550
Recommended	○	○	○	○	○	○	○	○	○	○	○	○	○	○	○	○	○			○	

## TiAIN-COATED SOLID CARBIDE END MILLS 3 FLUTE 45° HELIX LONG LENGTH WITH CHAMFER

### G9G49 FLAT SHANK


- ▶ Suitable for dry milling applications at high temperatures.
- ▶ Excellent high-performance end mills.

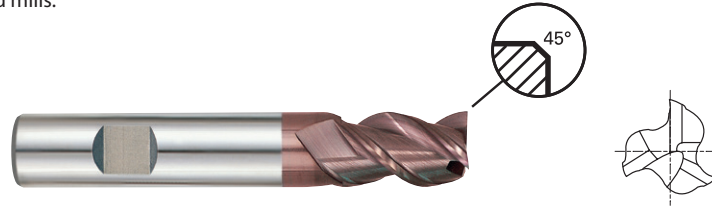

Unit : mm

EDP No.	Mill Diameter	Shank Diameter	Length of Cut	Overall Length	Chamfer
G9G49030	3.0	6	7	57	0.10
G9G49040	4.0	6	8	57	0.10
G9G49050	5.0	6	10	57	0.10
G9G49060	6.0	6	10	57	0.10
G9G49080	8.0	8	16	63	0.13
G9G49100	10.0	10	19	72	0.13
G9G49120	12.0	12	22	83	0.18
G9G49140	14.0	14	22	83	0.18
G9G49160	16.0	16	26	92	0.18
G9G49200	20.0	20	32	104	0.23

Mill Dia. Tolerance (mm)	Shank Dia. Tolerance
0 ~ - 0.03	h5

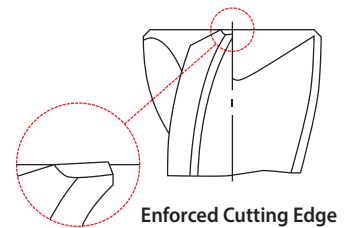


◎ : Excellent ○ : Good

ISO Material Description	P										M				K						
	Non-alloy steel					Low alloy steel					High alloyed steel, and tool steel	Stainless steel			Grey cast iron	Nodular cast iron		Malleable cast iron			
VDI 3323	1	2	3	4	5	6	7	8	9	10	11	12	13	14	15	16	17	18	19	20	
HRc	13	25	28	32	32	10	29	32	38	15	35	15	23	10	10	26	3	25		21	
HB	125	190	250	270	300	180	275	300	350	200	325	200	240	180	180	260	160	250	130	230	
Recommended	◎	◎	◎	◎	◎	◎	◎	◎	◎	◎	◎	○	○	○	○	○	○	○	○	○	
ISO Material Description	N					S					H										
	Aluminum-wrought alloy		Aluminum-cast, alloyed			Copper and Copper Alloys (Bronze / Brass)			Non Metallic Materials		Heat Resistant Super Alloys					Titanium Alloys		Hardened steel	Chilled Cast Iron	Hardened Cast Iron	
VDI 3323	21	22	23	24	25	26	27	28	29	30	31	32	33	34	35	36	37	38	39	40	41
HRc											15	30	25	38	34			55	60	42	55
HB	60	100	75	90	130	110	90	100			200	280	250	350	320	400 Rm	1050 Rm	550	630	400	550
Recommended	○	○	○	○	○	○	○	○			○	○	○	○	○	○	○			○	

# TiAIN-COATED SOLID CARBIDE END MILLS 4 FLUTE SHORT LENGTH

**G9432** PLAIN SHANK

- ▶ Suitable for dry milling applications at high temperatures.
- ▶ Excellent high-performance end mills.
- ▶ 4 flute allows for better work piece finishes.



Unit : mm

EDP No.	Mill Diameter	Shank Diameter	Length of Cut	Overall Length
G9432010	1.0	4	3	40
G9432015	1.5	4	4.5	40
G9432020	2.0	2	8	32
G9432025	2.5	2.5	8	32
G9432030	3.0	3	12	32
G9432035	3.5	3.5	12	32
G9432040	4.0	4	12	40
G9432045	4.5	4.5	14	50
G9432050	5.0	5	14	50
G9432055	5.5	5.5	16	50
G9432060	6.0	6	16	50
G9432070	7.0	7	20	60
G9432080	8.0	8	20	60
G9432090	9.0	9	20	60
G9432100	10.0	10	22	70
G9432120	12.0	12	22	70
G9432140	14.0	14	25	75
G9432160	16.0	16	25	75
G9432200	20.0	20	32	100

Mill Dia. Tolerance (mm)	Shank Dia. Tolerance
0 ~ - 0.03	h5


◎ : Excellent ○ : Good

ISO Material Description	P										M				K						
	Non-alloy steel					Low alloy steel					High alloyed steel, and tool steel	Stainless steel			Grey cast iron		Nodular cast iron		Malleable cast iron		
VDI 3323	1	2	3	4	5	6	7	8	9	10	11	12	13	14	15	16	17	18	19	20	
HRc	13	25	28	32	10	29	32	38	15	35	15	23	10	10	26	3	25		21		
HB	125	190	250	270	300	180	275	300	350	200	325	200	240	180	180	260	160	250	130	230	
Recommended	◎	◎	◎	◎	◎	◎	◎	◎	◎	◎	◎	○	○	○	○	○	○	○	○	○	
ISO Material Description	N					S					H										
	Aluminum-wrought alloy		Aluminum-cast, alloyed			Copper and Copper Alloys (Bronze / Brass)		Non Metallic Materials			Heat Resistant Super Alloys					Titanium Alloys		Hardened steel		Chilled Cast Iron	Hardened Cast Iron
VDI 3323	21	22	23	24	25	26	27	28	29	30	31	32	33	34	35	36	37	38	39	40	41
HRc											15	30	25	38	34			55	60	42	55
HB	60	100	75	90	130	110	90	100			200	280	250	350	320	400 Rm	1050 Rm	550	630	400	550
Recommended	○	○	○	○	○	○	○	○	○	○	○	○	○	○	○	○	○	○	○	○	○

## TiAIN-COATED SOLID CARBIDE END MILLS 4 FLUTE SHORT LENGTH WITH CHAMFER

### G9G50 PLAIN SHANK


- ▶ Suitable for dry milling applications at high temperatures.
- ▶ Excellent high-performance end mills.
- ▶ 4 flute allows for better work piece finishes.

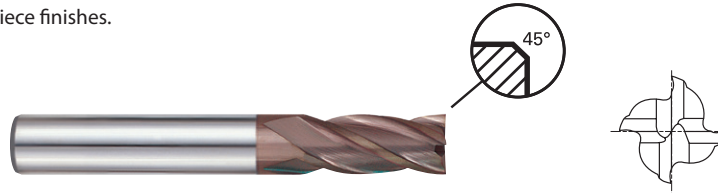

Unit : mm

EDP No.	Mill Diameter	Shank Diameter	Length of Cut	Overall Length	Chamfer
G9G50030	3.0	3	12	32	0.10
G9G50040	4.0	4	12	40	0.10
G9G50050	5.0	5	14	50	0.10
G9G50060	6.0	6	16	50	0.10
G9G50080	8.0	8	20	60	0.13
G9G50100	10.0	10	22	70	0.13
G9G50120	12.0	12	22	70	0.18
G9G50140	14.0	14	25	75	0.18
G9G50160	16.0	16	25	75	0.18
G9G50200	20.0	20	32	100	0.23

Mill Dia. Tolerance (mm)	Shank Dia. Tolerance
0 ~ - 0.03	h5

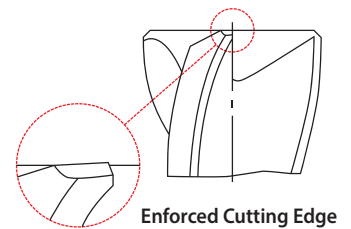


◎ : Excellent ○ : Good

ISO Material Description	P										M				K						
	Non-alloy steel					Low alloy steel					High alloyed steel, and tool steel	Stainless steel			Grey cast iron		Nodular cast iron		Malleable cast iron		
VDI 3323	1	2	3	4	5	6	7	8	9	10	11	12	13	14	15	16	17	18	19	20	
HRc		13	25	28	32	10	29	32	38	15	35	15	23	10	10	26	3	25		21	
HB	125	190	250	270	300	180	275	300	350	200	325	200	240	180	180	260	160	250	130	230	
Recommended	◎	◎	◎	◎	◎	◎	◎	◎	◎	◎	◎	○	○	○	○	○	○	○	○	○	
ISO Material Description	N					S					H										
	Aluminum-wrought alloy		Aluminum-cast, alloyed			Copper and Copper Alloys (Bronze / Brass)		Non Metallic Materials			Heat Resistant Super Alloys			Titanium Alloys		Hardened steel	Chilled Cast Iron	Hardened Cast Iron			
VDI 3323	21	22	23	24	25	26	27	28	29	30	31	32	33	34	35	36	37	38	39	40	41
HRc											15	30	25	38	34			55	60	42	55
HB	60	100	75	90	130	110	90	100			200	280	250	350	320	400 Rm	1050 Rm	550	630	400	550
Recommended	○	○	○	○	○	○	○	○	○	○	○	○	○	○	○	○	○			○	

# TiAIN-COATED SOLID CARBIDE END MILLS 4 FLUTE SHORT LENGTH

**G9A69** PLAIN SHANK

- ▶ Suitable for dry milling applications at high temperatures.
- ▶ Excellent high-performance end mills.
- ▶ 4 flute allows for better work piece finishes.



Unit : mm

EDP No.	Mill Diameter	Shank Diameter	Length of Cut	Overall Length
G9A69010	1.0	3	3	39
G9A69015	1.5	3	5	39
G9A69020	2.0	3	7	39
G9A69025	2.5	3	7	39
G9A69030	3.0	3	10	39
G9A69040	4.0	4	14	51
G9A69050	5.0	5	16	51
G9A69060	6.0	6	19	64
G9A69080	8.0	8	21	64
G9A69100	10.0	10	22	70
G9A69120	12.0	12	25	76
G9A69160	16.0	16	32	89
G9A69200	20.0	20	38	102

Mill Dia. Tolerance (mm)	Shank Dia. Tolerance
0 ~ - 0.03	h5

◎ : Excellent ○ : Good



ISO Material Description	P										M				K						
	Non-alloy steel					Low alloy steel					High alloyed steel, and tool steel		Stainless steel		Grey cast iron		Nodular cast iron		Malleable cast iron		
VDI 3323	1	2	3	4	5	6	7	8	9	10	11	12	13	14	15	16	17	18	19	20	
HRc	13	25	28	32	10	29	32	38	15	35	15	23	10	10	26	3	25		21		
HB	125	190	250	270	300	180	275	300	350	200	325	200	240	180	180	260	160	250	130	230	
Recommended	◎	◎	◎	◎	◎	◎	◎	◎	◎	◎	◎	○	○	○	○	○	○	○	○	○	
ISO Material Description	N					S					H										
	Aluminum-wrought alloy		Aluminum-cast, alloyed			Copper and Copper Alloys (Bronze / Brass)			Non Metallic Materials		Heat Resistant Super Alloys					Titanium Alloys		Hardened steel		Chilled Cast Iron	Hardened Cast Iron
VDI 3323	21	22	23	24	25	26	27	28	29	30	31	32	33	34	35	36	37	38	39	40	41
HRc											15	30	25	38	34			55	60	42	55
HB	60	100	75	90	130	110	90	100			200	280	250	350	320	400 Rm	1050 Rm	550	630	400	550
Recommended	○	○	○	○	○	○	○	○	○	○	○	○	○	○	○	○	○			○	



## TiAIN-COATED SOLID CARBIDE END MILLS 4 FLUTE SHORT LENGTH

### G9448 FLAT SHANK

- ▶ Suitable for dry milling applications at high temperatures.
- ▶ Excellent high-performance end mills.
- ▶ 4 flute allows for better work piece finishes.



Unit : mm

EDP No.	Mill Diameter	Shank Diameter	Length of Cut	Overall Length
G9448020	2.0	6	4	50
G9448025	2.5	6	4	50
G9448030	3.0	6	5	50
G9448035	3.5	6	6	50
G9448040	4.0	6	8	54
G9448045	4.5	6	8	54
G9448050	5.0	6	9	54
G9448060	6.0	6	10	54
G9448070	7.0	8	11	58
G9448080	8.0	8	12	58
G9448090	9.0	10	13	66
G9448100	10.0	10	14	66
G9448120	12.0	12	16	73
G9448140	14.0	14	18	75
G9448160	16.0	16	22	82
G9448180	18.0	18	24	84
G9448200	20.0	20	26	92

Mill Dia. Tolerance (mm)	Shank Dia. Tolerance
0 ~ -0.03	h5



◎ : Excellent ○ : Good

ISO Material Description	P										M				K						
	Non-alloy steel					Low alloy steel					High alloyed steel, and tool steel		Stainless steel		Grey cast iron		Nodular cast iron		Malleable cast iron		
VDI3323	1	2	3	4	5	6	7	8	9	10	11	12	13	14	15	16	17	18	19	20	
HRc	13	25	28	32	10	29	32	38	15	35	15	23	10	10	26	3	25		21		
HB	125	190	250	270	300	180	275	300	350	200	325	200	240	180	180	260	160	250	130	230	
Recommended	◎	◎	◎	◎	◎	◎	◎	◎	◎	◎	◎	○	○	○	○	○	○	○	○	○	
ISO Material Description	N										S						H				
	Aluminum-wrought alloy		Aluminum-cast, alloyed			Copper and Copper Alloys (Bronze / Brass)			Non Metallic Materials		Heat Resistant Super Alloys						Titanium Alloys		Hardened steel	Chilled Cast Iron	Hardened Cast Iron
VDI3323	21	22	23	24	25	26	27	28	29	30	31	32	33	34	35	36	37	38	39	40	41
HRc											15	30	25	38	34			55	60	42	55
HB	60	100	75	90	130	110	90	100			200	280	250	350	320	400 Rm	1050 Rm	550	630	400	550
Recommended	○	○	○	○	○	○	○	○	○	○	○	○	○	○	○	○	○			○	

# TiAIN-COATED SOLID CARBIDE END MILLS 4 FLUTE LONG LENGTH

**G9540** PLAIN SHANK

- ▶ Suitable for dry milling applications at high temperatures.
- ▶ Excellent high-performance end mills.
- ▶ 4 flute allows for better work piece finishes.



Unit : mm

EDP No.	Mill Diameter	Shank Diameter	Length of Cut	Overall Length
G9540035	3.5	3.5	10	50
G9540040	4.0	4	11	50
G9540045	4.5	4.5	11	50
G9540050	5.0	5	13	50
G9540055	5.5	5.5	13	57
G9540060	6.0	6	13	57
G9540065	6.5	6.5	16	60
G9540070	7.0	7	16	60
G9540075	7.5	7.5	19	63
G9540080	8.0	8	19	63
G9540085	8.5	8.5	19	67
G9540090	9.0	9	19	67
G9540095	9.5	9.5	22	72
G9540100	10.0	10	22	72
G9540110	11.0	11	26	83
G9540120	12.0	12	26	83
G9540130	13.0	13	26	83
G9540140	14.0	14	26	83
G9540150	15.0	15	32	92
G9540160	16.0	16	32	92
G9540180	18.0	18	32	92
G9540200	20.0	20	38	104

Mill Dia. Tolerance (mm)	Shank Dia. Tolerance
0 ~ - 0.03	h5


◎ : Excellent ○ : Good

ISO Material Description	P										M				K						
	Non-alloy steel					Low alloy steel					High alloyed steel, and tool steel	Stainless steel			Grey cast iron		Nodular cast iron		Malleable cast iron		
VDI 3323	1	2	3	4	5	6	7	8	9	10	11	12	13	14	15	16	17	18	19	20	
HRc	13	25	28	32	10	29	32	38	15	35	15	23	10	10	10	26	3	25	21		
HB	125	190	250	270	300	180	275	300	350	200	325	200	240	180	180	260	160	250	130	230	
Recommended	◎	◎	◎	◎	◎	◎	◎	◎	◎	◎	◎	○	○	○	○	○	○	○	○	○	
ISO Material Description	N					S					H										
	Aluminum-wrought alloy		Aluminum-cast, alloyed			Copper and Copper Alloys (Bronze / Brass)		Non Metallic Materials			Heat Resistant Super Alloys			Titanium Alloys		Hardened steel		Chilled Cast Iron	Hardened Cast Iron		
VDI 3323	21	22	23	24	25	26	27	28	29	30	31	32	33	34	35	36	37	38	39	40	41
HRc											15	30	25	38	34			55	60	42	55
HB	60	100	75	90	130	110	90	100			200	280	250	350	320	400 Rm	1050 Rm	550	630	400	550
Recommended	○	○	○	○	○	○	○	○	○	○	○	○	○	○	○	○	○			○	

## TiAIN-COATED SOLID CARBIDE END MILLS 4 FLUTE LONG LENGTH

### G9449 FLAT SHANK

- ▶ Suitable for dry milling applications at high temperatures.
- ▶ Excellent high-performance end mills.
- ▶ 4 flute allows for better work piece finishes.



Unit : mm

EDP No.	Mill Diameter	Shank Diameter	Length of Cut	Overall Length
G9449901	2.0	● 3	7	38
G9449030	3.0	6	8	57
G9449035	3.5	6	10	57
G9449040	4.0	6	11	57
G9449045	4.5	6	11	57
G9449050	5.0	6	13	57
G9449060	6.0	6	13	57
G9449070	7.0	8	16	63
G9449080	8.0	8	19	63
G9449090	9.0	10	19	72
G9449100	10.0	10	22	72
G9449120	12.0	12	26	83
G9449140	14.0	14	26	83
G9449160	16.0	16	32	92
G9449180	18.0	18	32	92
G9449200	20.0	20	38	104

● with plain shank

Mill Dia. Tolerance (mm)	Shank Dia. Tolerance
0 ~ - 0.03	h5


◎ : Excellent ○ : Good

ISO Material Description	P										M				K						
	Non-alloy steel					Low alloy steel					High alloyed steel, and tool steel	Stainless steel			Grey cast iron		Nodular cast iron		Malleable cast iron		
VDI 3323	1	2	3	4	5	6	7	8	9	10	11	12	13	14	15	16	17	18	19	20	
HRc	13	25	28	32	10	29	32	38	15	35	15	23	10	10	26	3	25		21		
HB	125	190	250	270	300	180	275	300	350	200	325	200	240	180	180	260	160	250	130	230	
Recommended	◎	◎	◎	◎	◎	◎	◎	◎	◎	◎	◎	○	○	○	○	○	○	○	○	○	
ISO Material Description	N										S						H				
	Aluminum-wrought alloy		Aluminum-cast, alloyed			Copper and Copper Alloys (Bronze / Brass)			Non Metallic Materials		Heat Resistant Super Alloys						Titanium Alloys		Hardened steel	Chilled Cast Iron	Hardened Cast Iron
VDI 3323	21	22	23	24	25	26	27	28	29	30	31	32	33	34	35	36	37	38	39	40	41
HRc											15	30	25	38	34			55	60	42	55
HB	60	100	75	90	130	110	90	100			200	280	250	350	320	400 Rm	1050 Rm	550	630	400	550
Recommended	○	○	○	○	○	○	○	○	○	○	○	○	○	○	○	○	○			○	

# TiAIN-COATED SOLID CARBIDE END MILLS 4 FLUTE LONG LENGTH WITH CHAMFER

**G9G51** FLAT SHANK


- ▶ Suitable for dry milling applications at high temperatures.
- ▶ Excellent high-performance end mills.
- ▶ 4 flute allows for better work piece finishes.

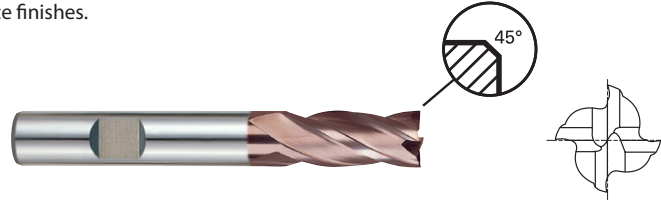

Unit : mm

EDP No.	Mill Diameter	Shank Diameter	Length of Cut	Overall Length	Chamfer
<b>G9G51030</b>	<b>3.0</b>	6	8	57	0.10
<b>G9G51040</b>	<b>4.0</b>	6	11	57	0.10
<b>G9G51050</b>	<b>5.0</b>	6	13	57	0.10
<b>G9G51060</b>	<b>6.0</b>	6	13	57	0.10
<b>G9G51080</b>	<b>8.0</b>	8	19	63	0.13
<b>G9G51100</b>	<b>10.0</b>	10	22	72	0.13
<b>G9G51120</b>	<b>12.0</b>	12	26	83	0.18
<b>G9G51140</b>	<b>14.0</b>	14	26	83	0.18
<b>G9G51160</b>	<b>16.0</b>	16	32	92	0.18
<b>G9G51200</b>	<b>20.0</b>	20	38	104	0.23

Mill Dia. Tolerance (mm)	Shank Dia. Tolerance
0 ~ - 0.03	h5

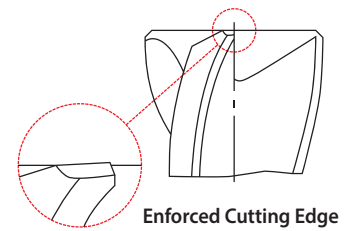


◎ : Excellent ○ : Good

ISO Material Description	P										M				K						
	Non-alloy steel					Low alloy steel					High alloyed steel, and tool steel		Stainless steel		Grey cast iron		Nodular cast iron		Malleable cast iron		
VDI 3323	1	2	3	4	5	6	7	8	9	10	11	12	13	14	15	16	17	18	19	20	
HRc																					
HB	125	190	250	270	300	180	275	300	350	200	325	200	240	180	180	260	160	250	130	230	
Recommended	◎	◎	◎	◎	◎	◎	◎	◎	◎	◎	◎	○	○	○	○	○	○	○	○	○	
ISO Material Description	N					S					H										
	Aluminum-wrought alloy		Aluminum-cast, alloyed			Copper and Copper Alloys (Bronze / Brass)			Non Metallic Materials		Heat Resistant Super Alloys					Titanium Alloys		Hardened steel	Chilled Cast Iron	Hardened Cast Iron	
VDI 3323	21	22	23	24	25	26	27	28	29	30	31	32	33	34	35	36	37	38	39	40	41
HRc																					
HB	60	100	75	90	130	110	90	100			200	280	250	350	320	400 Rm	1050 Rm	550	630	400	550
Recommended	○	○	○	○	○	○	○	○	○	○	○	○	○	○	○	○	○	○	○	○	○

**TiAIN-COATED SOLID CARBIDE END MILLS  
4 FLUTE EXTRA LONG LENGTH**

**G9453 PLAIN SHANK**

- ▶ Suitable for dry milling applications at high temperatures.
- ▶ Excellent high-performance end mills.
- ▶ 4 flute allows for better work piece finishes.



CARBIDE
4
30°
DIN 6535HA
P.68

Unit : mm

EDP No.	Mill Diameter	Shank Diameter	Length of Cut	Overall Length
G9453903	3.0	3	20	60
G9453030	3.0	3	30	75
G9453904	4.0	4	20	60
G9453040	4.0	4	30	75
G9453905	5.0	5	25	75
G9453050	5.0	5	40	100
G9453906	6.0	6	30	75
G9453060	6.0	6	50	150
G9453908	8.0	8	30	75
G9453080	8.0	8	50	150
G9453910	10.0	10	40	100
G9453100	10.0	10	60	150
G9453912	12.0	12	45	100
G9453120	12.0	12	75	150
G9453914	14.0	14	45	100
G9453140	14.0	14	65	150
G9453916	16.0	16	45	100
G9453160	16.0	16	65	150
G9453918	18.0	18	45	100
G9453180	18.0	18	65	150
G9453920	20.0	20	45	100
G9453200	20.0	20	65	150

Mill Dia. Tolerance (mm)	Shank Dia. Tolerance
0 ~ - 0.03	h5

◎ : Excellent ○ : Good

ISO Material Description	P										M				K					
	Non-alloy steel					Low alloy steel					High alloyed steel, and tool steel	Stainless steel			Grey cast iron	Nodular cast iron		Malleable cast iron		
VDI 3323	1	2	3	4	5	6	7	8	9	10	11	12	13	14	15	16	17	18	19	20
HRc	13	25	28	32	10	29	32	38	15	35	15	23	10	10	26	3	25		21	
HB	125	190	250	270	300	180	275	300	350	200	325	200	240	180	180	260	160	250	130	230
Recommended	◎	◎	◎	◎	◎	◎	◎	◎	◎	◎	◎	○	○	○	○	○	○	○	○	○


  

ISO Material Description	N										S						H				
	Aluminum-wrought alloy		Aluminum-cast, alloyed			Copper and Copper Alloys (Bronze / Brass)			Non Metallic Materials		Heat Resistant Super Alloys						Titanium Alloys		Hardened steel	Chilled Cast Iron	Hardened Cast Iron
VDI 3323	21	22	23	24	25	26	27	28	29	30	31	32	33	34	35	36	37	38	39	40	41
HRc											15	30	25	38	34			55	60	42	55
HB	60	100	75	90	130	110	90	100			200	280	250	350	320	400 Rm	1050 Rm	550	630	400	550
Recommended	○	○	○	○	○	○	○	○			○	○	○	○	○	○	○			○	

# TiAIN-COATED SOLID CARBIDE END MILLS 4&6 FLUTE 45° HELIX SHORT / LONG LENGTH

**G9F45** PLAIN SHANK  
**G9F46** PLAIN SHANK

- Suitable for dry milling applications at high temperatures.
- Excellent high-performance end mills.



## SHORT

Unit : mm


EDP No.	Mill Diameter	Shank Diameter	Length of Cut	Overall Length	No. of Flute
G9F45030	3.0	4	6	50	4
G9F45040	4.0	4	11	50	4
G9F45050	5.0	6	13	50	6
G9F45060	6.0	6	16	50	6
G9F45080	8.0	8	19	60	6
G9F45100	10.0	10	22	75	6
G9F45120	12.0	12	26	75	6
G9F45140	14.0	14	30	90	6
G9F45160	16.0	16	32	100	6
G9F45180	18.0	18	38	100	6
G9F45000	20.0	20	38	100	6

## LONG

Unit : mm

EDP No.	Mill Diameter	Shank Diameter	Length of Cut	Overall Length	No. of Flute
G9F46120	12.0	12	50	100	6
G9F46160	16.0	16	65	150	6
G9F46200	20.0	20	75	150	6

Mill Dia. Tolerance (mm)	Shank Dia. Tolerance
0 ~ - 0.03	h5




◎ : Excellent ○ : Good

ISO Material Description	P										M				K						
	Non-alloy steel					Low alloy steel					High alloyed steel, and tool steel		Stainless steel		Grey cast iron		Nodular cast iron		Malleable cast iron		
VDI 3323	1	2	3	4	5	6	7	8	9	10	11	12	13	14	15	16	17	18	19	20	
HRc	13	25	28	32	32	10	29	32	38	15	35	15	23	10	10	26	3	25	21	21	
HB	125	190	250	270	300	180	275	300	350	200	325	200	240	180	180	260	160	250	130	230	
Recommended	○	○	○	○	○	○	○	○	◎	◎	◎	○	○	○	○	○	○	○	○	○	
ISO Material Description	N				S					H											
	Aluminum-wrought alloy		Aluminum-cast, alloyed		Copper and Copper Alloys (Bronze / Brass)			Non Metallic Materials		Heat Resistant Super Alloys				Titanium Alloys		Hardened steel		Chilled Cast Iron		Hardened Cast Iron	
VDI 3323	21	22	23	24	25	26	27	28	29	30	31	32	33	34	35	36	37	38	39	40	41
HRc											15	30	25	38	34			55	60	42	55
HB	60	100	75	90	130	110	90	100			200	280	250	350	320	400 Rm	1050 Rm	550	630	400	550
Recommended																		○	○	○	○

**X-COATED SOLID CARBIDE END MILLS  
MULTI FLUTE LONG LENGTH ROUGHING - COARSE**

**G9A42 FLAT SHANK**

- Suitable for dry milling applications at high temperatures.
- Excellent high-performance end mills.
- Fast chip ejection.

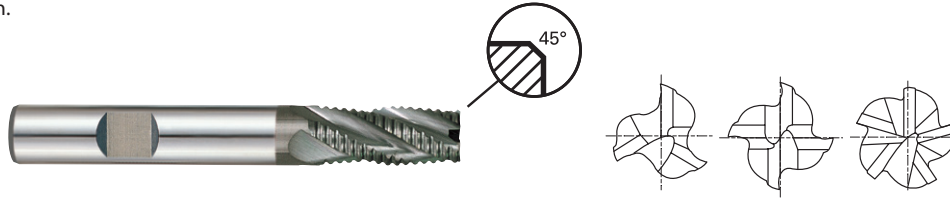


Unit : mm

EDP No.	Mill Diameter	Shank Diameter	Length of Cut	Overall Length	No. of Flute	Chamfer
	h10	h5				
<b>G9A42060</b>	<b>6.0</b>	6	16	57	3	0.60
<b>G9A42080</b>	<b>8.0</b>	8	16	63	3	0.60
<b>G9A42100</b>	<b>10.0</b>	10	22	72	4	0.60
<b>G9A42120</b>	<b>12.0</b>	12	26	83	4	0.74
<b>G9A42140</b>	<b>14.0</b>	14	26	83	4	0.94
<b>G9A42160</b>	<b>16.0</b>	16	32	92	4	0.94
<b>G9A42180</b>	<b>18.0</b>	18	32	92	4	0.94
<b>G9A42200</b>	<b>20.0</b>	20	38	104	4	0.94
<b>G9A42250</b>	<b>25.0</b>	25	45	121	5	0.94

**Tolerances according to DIN 7160 & 7161**

Tolerance range in $\mu\text{m}$					
Nominal-Diameter in mm					
	from 1 to 3	over 3 to 6	over 6 to 10	over 10 to 18	over 18 to 30
<b>h10</b>	0 -40	0 -48	0 -58	0 -70	0 -84
<b>h5</b>	0 -4	0 -5	0 -6	0 -8	0 -9

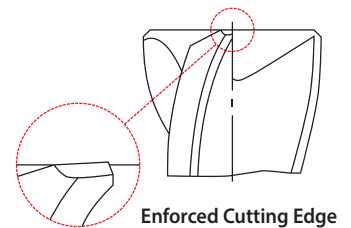

◎ : Excellent ○ : Good

ISO Material Description	P										M				K						
	Non-alloy steel					Low alloy steel					High alloy steel, and tool steel	Stainless steel			Grey cast iron	Nodular cast iron		Malleable cast iron			
VDI 3323	1	2	3	4	5	6	7	8	9	10	11	12	13	14	15	16	17	18	19	20	
HRc	13	25	28	32	32	10	29	32	38	15	35	15	23	10	10	26	3	25		21	
HB	125	190	250	270	300	180	275	300	350	200	325	200	240	180	180	260	160	250	130	230	
Recommended	◎	◎	◎	◎	◎	◎	◎	◎	◎	◎	◎	○	○	○	○	○	○	○	○	○	
ISO Material Description	N										S						H				
	Aluminum-wrought alloy		Aluminum-cast, alloyed			Copper and Copper Alloys (Bronze / Brass)			Non Metallic Materials		Heat Resistant Super Alloys						Titanium Alloys		Hardened steel	Chilled Cast Iron	Hardened Cast Iron
VDI 3323	21	22	23	24	25	26	27	28	29	30	31	32	33	34	35	36	37	38	39	40	41
HRc											15	30	25	38	34			55	60	42	55
HB	60	100	75	90	130	110	90	100			200	280	250	350	320	400 Rm	1050 Rm	550	630	400	550
Recommended	○	○	○	○	○	○	○	○			○	○	○	○	○	○	○			○	

# TiAlN-COATED SOLID CARBIDE END MILLS 2 FLUTE DRILL MILLS

**G9400** PLAIN SHANK





Unit : mm

EDP No.	Mill Diameter	Shank Diameter	Length of Cut	Overall Length
G9400030	3.0	4	6	50
G9400040	4.0	5	8	50
G9400050	5.0	6	10	50
G9400060	6.0	8	12	60
G9400080	8.0	10	16	70
G9400100	10.0	12	18	70
G9400120	12.0	12	20	70
G9400140	14.0	14	24	80
G9400160	16.0	16	26	80
G9400200	20.0	20	32	100

► TiN, TiCN and TiAlN Coatings are available on your request.

- Performs many drilling and milling operations that are not presently done with the standard end mill.
- Among the many vertical milling machine operations, applications for the Drill Mill are:  
Drilling, Slotting, NC Milling, Drilling & Slotting, Profile Milling and Chamfering.

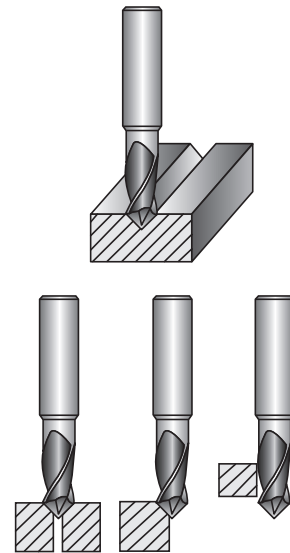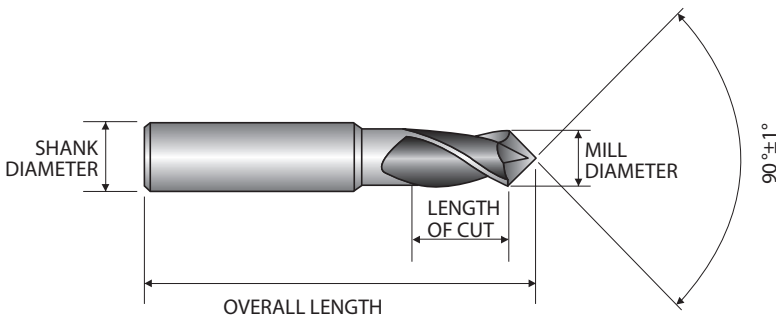

Mill Dia. Tolerance (mm)	Shank Dia. Tolerance
Ø3 ~ Ø10=h9	h5
Ø12 ~ Ø20=d9	

◎ : Excellent ○ : Good

ISO Material Description	P										M				K						
	Non-alloy steel					Low alloy steel					High alloyed steel, and tool steel		Stainless steel		Grey cast iron		Nodular cast iron		Malleable cast iron		
VDI 3323	1	2	3	4	5	6	7	8	9	10	11	12	13	14	15	16	17	18	19	20	
HRc	13	25	28	32	10	29	32	38	15	35	15	23	10	10	26	3	25	21			
HB	125	190	250	270	300	180	275	300	350	200	325	200	240	180	180	260	160	250	130	230	
Recommended	◎	◎	◎	◎	◎	◎	◎	◎	◎	◎	◎	○	○	○	○	○	○	○	○	○	
ISO Material Description	N				S						H										
	Aluminum- wrought alloy		Aluminum-cast, alloyed		Copper and Copper Alloys (Bronze / Brass)			Non Metallic Materials			Heat Resistant Super Alloys				Titanium Alloys		Hardened steel		Chilled Cast Iron		Hardened Cast Iron
VDI 3323	21	22	23	24	25	26	27	28	29	30	31	32	33	34	35	36	37	38	39	40	41
HRc											15	30	25	38	34	55	60	42	55		
HB	60	100	75	90	130	110	90	100			200	280	250	350	320	400 Rm	1050 Rm	550	630	400	550
Recommended	○	○	○	○	○																




**G9624, G9A70, G9437, G9438, G9454, G9455** SERIES

Vc = m/min.  
 fz = mm/tooth  
 RPM = rev./min.  
 FEED = mm/min.  
 Ap = mm

**2 FLUTE BALL NOSE**

ISO	VDI 3323	Material Description	Ae	Parameter	Mill Diameter (Ø)											
					2.0	3.0	4.0	5.0	6.0	8.0	10.0	12.0	14.0	16.0	18.0	20.0
<b>P</b>	1-4	Non-alloy steel	0.2D	Vc	80	105	110	125	135	155	170	190	200	205	215	225
				fz	0.026	0.025	0.035	0.045	0.06	0.089	0.122	0.15	0.165	0.18	0.188	0.201
				RPM	12732	11141	8754	7958	7162	6167	5411	5040	4547	4078	3802	3581
				FEED	662	557	613	716	859	1098	1320	1512	1501	1468	1430	1440
	Ap		0.2	0.2	0.2	0.2	0.2	0.3	0.3	0.3	0.3	0.3	0.3	0.3	0.3	
	5		0.2D	Vc	55	80	90	95	110	125	135	150	160	160	170	175
				fz	0.023	0.023	0.031	0.04	0.06	0.08	0.1	0.12	0.128	0.141	0.148	0.158
				RPM	8754	8488	7162	6048	5836	4974	4297	3979	3638	3183	3006	2785
		FEED		403	390	444	484	700	796	859	955	931	898	890	880	
	Ap	0.2	0.2	0.2	0.2	0.2	0.3	0.3	0.3	0.3	0.3	0.3	0.3	0.3		
	6-7	Low alloy steel	0.2D	Vc	80	105	110	125	135	155	170	190	200	205	215	225
				fz	0.026	0.025	0.035	0.045	0.06	0.089	0.122	0.15	0.165	0.18	0.188	0.201
RPM				12732	11141	8754	7958	7162	6167	5411	5040	4547	4078	3802	3581	
FEED				662	557	613	716	859	1098	1320	1512	1501	1468	1430	1440	
Ap	0.2		0.2	0.2	0.2	0.2	0.3	0.3	0.3	0.3	0.3	0.3	0.3	0.3		
8-9	0.2D		Vc	55	80	90	95	110	125	135	150	160	160	170	175	
			fz	0.023	0.023	0.031	0.04	0.06	0.08	0.1	0.12	0.128	0.141	0.148	0.158	
			RPM	8754	8488	7162	6048	5836	4974	4297	3979	3638	3183	3006	2785	
		FEED	403	390	444	484	700	796	859	955	931	898	890	880		
Ap	0.2	0.2	0.2	0.2	0.2	0.3	0.3	0.3	0.3	0.3	0.3	0.3	0.3			
10	High alloyed steel, and tool steel	0.2D	Vc	80	105	110	125	135	155	170	190	200	205	215	225	
			fz	0.026	0.025	0.035	0.045	0.06	0.089	0.122	0.15	0.165	0.18	0.188	0.201	
			RPM	12732	11141	8754	7958	7162	6167	5411	5040	4547	4078	3802	3581	
			FEED	662	557	613	716	859	1098	1320	1512	1501	1468	1430	1440	
Ap		0.2	0.2	0.2	0.2	0.2	0.3	0.3	0.3	0.3	0.3	0.3	0.3	0.3		
11.1 - 11.2		0.2D	Vc	55	80	90	95	110	125	135	150	160	160	170	175	
			fz	0.023	0.023	0.031	0.04	0.06	0.08	0.1	0.12	0.128	0.141	0.148	0.158	
			RPM	8754	8488	7162	6048	5836	4974	4297	3979	3638	3183	3006	2785	
	FEED		403	390	444	484	700	796	859	955	931	898	890	880		
Ap	0.2	0.2	0.2	0.2	0.2	0.3	0.3	0.3	0.3	0.3	0.3	0.3	0.3			
<b>K</b>	15-20	Grey cast iron Nodular cast iron Malleable cast iron	0.7D	Vc	65	65	65	65	65	65	65	65	60	65	60	65
				fz	0.01	0.016	0.028	0.04	0.053	0.092	0.112	0.131	0.164	0.177	0.209	0.2
				RPM	10345	6897	5173	4138	3448	2586	2069	1724	1364	1293	1061	1035
				FEED	207	221	290	331	366	476	463	452	447	458	444	414
Ap	0.3	0.3	0.3	0.3	0.3	0.3	0.3	0.3	0.3	0.3	0.3	0.3	0.3			
<b>N</b>	21~22	Aluminum-wrought alloy	0.7D	Vc	195	195	195	190	195	200	195	195	190	195	190	185
				fz	0.006	0.01	0.013	0.019	0.023	0.034	0.044	0.061	0.073	0.07	0.079	0.092
				RPM	31035	20690	15518	12096	10345	7958	6207	5173	4320	3879	3360	2944
				FEED	372	414	403	460	476	541	546	631	631	543	531	542
Ap	0.3	0.3	0.3	0.3	0.3	0.3	0.3	0.3	0.3	0.3	0.3	0.3	0.3			
23~25	Aluminum-cast, alloyed	0.7D	Vc	195	195	195	190	195	200	195	195	190	195	190	185	
			fz	0.006	0.01	0.013	0.019	0.023	0.034	0.044	0.061	0.073	0.07	0.079	0.092	
			RPM	31035	20690	15518	12096	10345	7958	6207	5173	4320	3879	3360	2944	
			FEED	372	414	403	460	476	541	546	631	631	543	531	542	
Ap	0.3	0.3	0.3	0.3	0.3	0.3	0.3	0.3	0.3	0.3	0.3	0.3	0.3			
<b>H</b>	38.1	Hardened steel	0.2D	Vc	25	35	45	50	50	50	55	55	55	60	60	60
				fz	0.016	0.016	0.021	0.024	0.03	0.046	0.054	0.07	0.081	0.091	0.1	0.111
				RPM	3979	3714	3581	3183	2653	1989	1751	1459	1251	1194	1061	955
				FEED	127	119	150	153	159	183	189	204	203	217	212	212
Ap	0.2	0.2	0.2	0.2	0.2	0.3	0.3	0.3	0.3	0.3	0.3	0.3	0.3			
40	Chilled Cast Iron	0.2D	Vc	55	80	90	95	110	125	135	150	160	160	170	175	
			fz	0.023	0.023	0.031	0.04	0.06	0.08	0.1	0.12	0.128	0.141	0.148	0.158	
			RPM	8754	8488	7162	6048	5836	4974	4297	3979	3638	3183	3006	2785	
			FEED	403	390	444	484	700	796	859	955	931	898	890	880	
Ap	0.2	0.2	0.2	0.2	0.2	0.3	0.3	0.3	0.3	0.3	0.3	0.3	0.3			

※ The FEED, in long & extra long types, should be reduced by around 50%



## G9B81 SERIES


Vc = m/min.  
 fz = mm/tooth  
 RPM = rev./min.  
 FEED = mm/min.  
 Ap = mm

### 2 FLUTE BALL NOSE

ISO	VDI 3323	Material Description	Parameter	Mill Diameter (Ø)				
				0.4	0.5	0.6	0.8	1.0
<b>P</b>	1-4	Non-alloy steel	Vc	33~43	41~53	50~64	66~85	77~97
			fz	0.003~0.006	0.003~0.006	0.004~0.008	0.004~0.008	0.004~0.010
			RPM	26350~34000	26350~34000	26350~34000	26350~34000	24650~31000
			FEED	150~415	150~415	190~535	190~535	210~595
			Ap	0.018~0.036	0.023~0.045	0.027~0.054	0.036~0.072	0.045~0.090
	5		Vc	24~30	30~38	36~46	48~61	55~69
			fz	0.002~0.005	0.002~0.005	0.002~0.006	0.002~0.006	0.003~0.007
			RPM	19100~24200	19100~24200	19100~24200	19100~24200	17400~22100
			FEED	75~230	75~230	95~300	95~300	105~330
			Ap	0.018~0.036	0.023~0.045	0.027~0.054	0.036~0.072	0.045~0.090
	6-7	Low alloy steel	Vc	33~43	41~53	50~64	66~85	77~97
			fz	0.003~0.006	0.003~0.006	0.004~0.008	0.004~0.008	0.004~0.010
			RPM	26350~34000	26350~34000	26350~34000	26350~34000	24650~31000
			FEED	150~415	150~415	190~535	190~535	210~595
			Ap	0.018~0.036	0.023~0.045	0.027~0.054	0.036~0.072	0.045~0.090
	8-9		Vc	24~30	30~38	36~46	48~61	55~69
			fz	0.002~0.005	0.002~0.005	0.002~0.006	0.002~0.006	0.003~0.007
			RPM	19100~24200	19100~24200	19100~24200	19100~24200	17400~22100
			FEED	75~230	75~230	95~300	95~300	105~330
			Ap	0.018~0.036	0.023~0.045	0.027~0.054	0.036~0.072	0.045~0.090
	10	High alloyed steel, and tool steel	Vc	33~43	41~53	50~64	66~85	77~97
			fz	0.003~0.006	0.003~0.006	0.004~0.008	0.004~0.008	0.004~0.010
			RPM	26350~34000	26350~34000	26350~34000	26350~34000	24650~31000
			FEED	150~415	150~415	190~535	190~535	210~595
Ap			0.018~0.036	0.023~0.045	0.027~0.054	0.036~0.072	0.045~0.090	
11.1 - 11.2	Vc		24~30	30~38	36~46	48~61	55~69	
	fz		0.002~0.005	0.002~0.005	0.002~0.006	0.002~0.006	0.003~0.007	
	RPM		19100~24200	19100~24200	19100~24200	19100~24200	17400~22100	
	FEED		75~230	75~230	95~300	95~300	105~330	
	Ap		0.018~0.036	0.023~0.045	0.027~0.054	0.036~0.072	0.045~0.090	

※ The FEED, in long & extra long types, should be reduced by around 50%

▶ NEXT PAGE

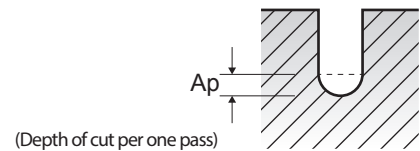


## G9B81 SERIES

Vc = m/min.  
 fz = mm/tooth  
 RPM = rev./min.  
 FEED = mm/min.  
 Ap = mm

### 2 FLUTE BALL NOSE

VDI 3323	Material Description	Parameter	Mill Diameter (Ø)							
			1.2	1.4	1.5	1.6	1.8	2.0	3.0	4.0
1-4	Non-alloy steel	Vc	77~98	79~97	75~97	78~101	82~103	82~101	85~104	90~117
		fz	0.005~0.013	0.006~0.015	0.007~0.016	0.007~0.017	0.007~0.018	0.008~0.021	0.012~0.030	0.015~0.036
		RPM	20500~26000	18000~22000	16000~20500	15500~20000	14500~18200	13000~16000	9000~11000	7200~9350
		FEED	210~665	210~665	210~665	210~665	210~665	210~665	210~665	210~665
		Ap	0.055~0.100	0.062~0.125	0.070~0.135	0.075~0.145	0.080~0.160	0.090~0.180	0.135~0.270	0.180~0.360
5	Non-alloy steel	Vc	55~69	56~67	54~70	56~70	58~72	59~72	57~108	63~83
		fz	0.004~0.009	0.004~0.011	0.005~0.011	0.005~0.012	0.005~0.013	0.006~0.014	0.009~0.014	0.011~0.025
		RPM	14500~18300	12800~15300	11500~14900	11200~14000	10200~12800	9400~11500	6000~11500	5000~6600
		FEED	105~330	105~330	105~330	105~330	105~330	105~330	105~330	105~330
		Ap	0.055~0.100	0.062~0.125	0.070~0.135	0.075~0.145	0.080~0.160	0.090~0.180	0.135~0.270	0.180~0.360
6-7	Low alloy steel	Vc	77~98	79~97	75~97	78~101	82~103	82~101	85~104	90~117
		fz	0.005~0.013	0.006~0.015	0.007~0.016	0.007~0.017	0.007~0.018	0.008~0.021	0.012~0.030	0.015~0.036
		RPM	20500~26000	18000~22000	16000~20500	15500~20000	14500~18200	13000~16000	9000~11000	7200~9350
		FEED	210~665	210~665	210~665	210~665	210~665	210~665	210~665	210~665
		Ap	0.055~0.100	0.062~0.125	0.070~0.135	0.075~0.145	0.080~0.160	0.090~0.180	0.135~0.270	0.180~0.360
8-9	Low alloy steel	Vc	55~69	56~67	54~70	56~70	58~72	59~72	57~108	63~83
		fz	0.004~0.009	0.004~0.011	0.005~0.011	0.005~0.012	0.005~0.013	0.006~0.014	0.009~0.014	0.011~0.025
		RPM	14500~18300	12800~15300	11500~14900	11200~14000	10200~12800	9400~11500	6000~11500	5000~6600
		FEED	105~330	105~330	105~330	105~330	105~330	105~330	105~330	105~330
		Ap	0.055~0.100	0.062~0.125	0.070~0.135	0.075~0.145	0.080~0.160	0.090~0.180	0.135~0.270	0.180~0.360
10	High alloyed steel, and tool steel	Vc	77~98	79~97	75~97	78~101	82~103	82~101	85~104	90~117
		fz	0.005~0.013	0.006~0.015	0.007~0.016	0.007~0.017	0.007~0.018	0.008~0.021	0.012~0.030	0.015~0.036
		RPM	20500~26000	18000~22000	16000~20500	15500~20000	14500~18200	13000~16000	9000~11000	7200~9350
		FEED	210~665	210~665	210~665	210~665	210~665	210~665	210~665	210~665
		Ap	0.055~0.100	0.062~0.125	0.070~0.135	0.075~0.145	0.080~0.160	0.090~0.180	0.135~0.270	0.180~0.360
11.1 - 11.2	High alloyed steel, and tool steel	Vc	55~69	56~67	54~70	56~70	58~72	59~72	57~108	63~83
		fz	0.004~0.009	0.004~0.011	0.005~0.011	0.005~0.012	0.005~0.013	0.006~0.014	0.009~0.014	0.011~0.025
		RPM	14500~18300	12800~15300	11500~14900	11200~14000	10200~12800	9400~11500	6000~11500	5000~6600
		FEED	105~330	105~330	105~330	105~330	105~330	105~330	105~330	
		Ap	0.055~0.100	0.062~0.125	0.070~0.135	0.075~0.145	0.080~0.160	0.090~0.180	0.135~0.270	0.180~0.360

※ The FEED, in long & extra long types, should be reduced by around 50%

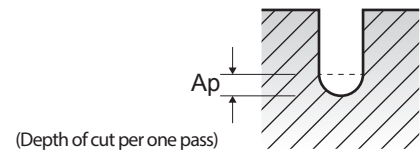


## G9634 SERIES

Vc = m/min.  
 fz = mm/tooth  
 RPM = rev./min.  
 FEED = mm/min.

### 4 FLUTE BALL NOSE

ISO	VDI 3323	Material Description	Ae	Parameter	Mill Diameter (Ø)											
					2.0	3.0	4.0	5.0	6.0	8.0	10.0	12.0	14.0	16.0	18.0	20.0
P	1-4	Non-alloy steel	0.2D	Vc	85	110	110	125	135	155	170	190	200	205	215	225
				fz	0.013	0.019	0.027	0.033	0.046	0.068	0.089	0.112	0.124	0.136	0.14	0.15
				RPM	13528	11671	8754	7958	7162	6167	5411	5040	4547	4078	3802	3581
				FEED	703	887	945	1050	1318	1677	1926	2258	2255	2219	2129	2149
	Ap		0.2	0.2	0.2	0.2	0.2	0.3	0.3	0.3	0.3	0.3	0.3	0.3	0.3	
	5		0.2D	Vc	65	80	90	95	110	125	135	150	160	160	170	175
				fz	0.01	0.017	0.024	0.03	0.046	0.06	0.076	0.089	0.099	0.108	0.111	0.119
				RPM	10345	8488	7162	6048	5836	4974	4297	3979	3638	3183	3006	2785
		FEED		414	577	688	726	1074	1194	1306	1416	1441	1375	1335	1326	
	Ap	0.2	0.2	0.2	0.2	0.2	0.3	0.3	0.3	0.3	0.3	0.3	0.3	0.3		
	6-7	Low alloy steel	0.2D	Vc	85	110	110	125	135	155	170	190	200	205	215	225
				fz	0.013	0.019	0.027	0.033	0.046	0.068	0.089	0.112	0.124	0.136	0.14	0.15
RPM				13528	11671	8754	7958	7162	6167	5411	5040	4547	4078	3802	3581	
FEED				703	887	945	1050	1318	1677	1926	2258	2255	2219	2129	2149	
Ap	0.2		0.2	0.2	0.2	0.2	0.3	0.3	0.3	0.3	0.3	0.3	0.3	0.3		
8-9	0.2D		Vc	65	80	90	95	110	125	135	150	160	160	170	175	
			fz	0.01	0.017	0.024	0.03	0.046	0.06	0.076	0.089	0.099	0.108	0.111	0.119	
			RPM	10345	8488	7162	6048	5836	4974	4297	3979	3638	3183	3006	2785	
		FEED	414	577	688	726	1074	1194	1306	1416	1441	1375	1335	1326		
Ap	0.2	0.2	0.2	0.2	0.2	0.3	0.3	0.3	0.3	0.3	0.3	0.3	0.3			
10	High alloyed steel, and tool steel	0.2D	Vc	85	110	110	125	135	155	170	190	200	205	215	225	
			fz	0.013	0.019	0.027	0.033	0.046	0.068	0.089	0.112	0.124	0.136	0.14	0.15	
			RPM	13528	11671	8754	7958	7162	6167	5411	5040	4547	4078	3802	3581	
			FEED	703	887	945	1050	1318	1677	1926	2258	2255	2219	2129	2149	
Ap		0.2	0.2	0.2	0.2	0.2	0.3	0.3	0.3	0.3	0.3	0.3	0.3	0.3		
11.1 - 11.2		0.2D	Vc	65	80	90	95	110	125	135	150	160	160	170	175	
			fz	0.01	0.017	0.024	0.03	0.046	0.06	0.076	0.089	0.099	0.108	0.111	0.119	
			RPM	10345	8488	7162	6048	5836	4974	4297	3979	3638	3183	3006	2785	
	FEED		414	577	688	726	1074	1194	1306	1416	1441	1375	1335	1326		
Ap	0.2	0.2	0.2	0.2	0.2	0.3	0.3	0.3	0.3	0.3	0.3	0.3	0.3			
K	15-20	Grey cast iron Nodular cast iron Malleable cast iron	0.7D	Vc	65	65	65	65	65	65	65	65	60	65	60	
				fz	0.008	0.012	0.021	0.03	0.04	0.068	0.083	0.097	0.125	0.135	0.159	0.15
				RPM	10345	6897	5173	4138	3448	2586	2069	1724	1364	1293	1061	1035
				FEED	331	331	434	497	552	703	687	669	682	698	675	621
Ap	0.3	0.3	0.3	0.3	0.3	0.3	0.3	0.3	0.3	0.3	0.3	0.3	0.3			
N	21~22	Aluminum-wrought alloy	0.7D	Vc	195	195	195	190	195	200	195	195	190	195	185	
				fz	0.005	0.007	0.01	0.015	0.017	0.026	0.033	0.046	0.055	0.053	0.06	0.069
				RPM	31035	20690	15518	12096	10345	7958	6207	5173	4320	3879	3360	2944
				FEED	621	579	621	726	703	828	819	952	950	822	806	813
Ap	0.3	0.3	0.3	0.3	0.3	0.3	0.3	0.3	0.3	0.3	0.3	0.3	0.3			
N	23~25	Aluminum-cast, alloyed	0.7D	Vc	195	195	195	190	195	200	195	195	190	195	185	
				fz	0.005	0.007	0.01	0.015	0.017	0.026	0.033	0.046	0.055	0.053	0.06	0.069
				RPM	31035	20690	15518	12096	10345	7958	6207	5173	4320	3879	3360	2944
				FEED	621	579	621	726	703	828	819	952	950	822	806	813
Ap	0.3	0.3	0.3	0.3	0.3	0.3	0.3	0.3	0.3	0.3	0.3	0.3	0.3			
H	38.1	Hardened steel	0.2D	Vc	25	35	45	50	50	55	55	55	55	55	60	60
				fz	0.008	0.012	0.016	0.019	0.022	0.034	0.041	0.053	0.062	0.073	0.076	0.084
				RPM	3979	3714	3581	3183	2653	2188	1751	1459	1251	1094	1061	955
				FEED	127	178	229	242	233	298	287	309	310	320	323	321
Ap	0.2	0.2	0.2	0.2	0.2	0.3	0.3	0.3	0.3	0.3	0.3	0.3	0.3			
H	40	Chilled Cast Iron	0.2D	Vc	65	80	90	95	110	125	135	150	160	160	170	175
				fz	0.01	0.017	0.024	0.03	0.046	0.06	0.076	0.089	0.099	0.108	0.111	0.119
				RPM	10345	8488	7162	6048	5836	4974	4297	3979	3638	3183	3006	2785
				FEED	414	577	688	726	1074	1194	1306	1416	1441	1375	1335	1326
Ap	0.2	0.2	0.2	0.2	0.2	0.3	0.3	0.3	0.3	0.3	0.3	0.3	0.3			

※ The FEED, in long & extra long types, should be reduced by around 50%




## G9B82, G9B83 SERIES

Vc = m/min.  
 fz = mm/tooth  
 RPM = rev./min.  
 FEED = mm/min.

### 2 FLUTE CORNER RADIUS - SLOTTING

ISO	VDI 3323	Material Description	Ae	Ap	Parameter	Mill Diameter (Ø)										
						2.0	3.0	4.0	5.0	6.0	8.0	10.0	12.0			
P	1-4	Non-alloy steel	1.0D	0.5D (Up to Ø3 : 0.2D)	Vc	50	55	65	70	70	70	70	70			
					fz	0.01	0.015	0.025	0.031	0.039	0.057	0.064	0.065			
	RPM				7958	5836	5173	4456	3714	2785	2228	1857				
	FEED				159	175	259	276	290	318	285	241				
	5				Low alloy steel	1.0D	0.5D (Up to Ø3 : 0.2D)	Vc	30	35	40	40	45	45	40	45
								fz	0.01	0.016	0.025	0.031	0.041	0.05	0.05	0.048
	RPM	4775	3714	3183				2546	2387	1790	1273	1194				
	FEED	95	119	159				158	196	179	127	115				
	6-7	High alloyed steel, and tool steel	1.0D	0.5D (Up to Ø3 : 0.2D)				Vc	50	55	65	70	70	70	70	70
								fz	0.01	0.015	0.025	0.031	0.039	0.057	0.064	0.065
	RPM				7958	5836	5173	4456	3714	2785	2228	1857				
	FEED				159	175	259	276	290	318	285	241				
8-9	High alloyed steel, and tool steel				1.0D	0.5D (Up to Ø3 : 0.2D)	Vc	30	35	40	40	45	45	40	45	
							fz	0.01	0.016	0.025	0.031	0.041	0.05	0.05	0.048	
RPM		4775	3714	3183			2546	2387	1790	1273	1194					
FEED		95	119	159			158	196	179	127	115					
10		High alloyed steel, and tool steel	1.0D	0.5D (Up to Ø3 : 0.2D)			Vc	50	55	65	70	70	70	70	70	
							fz	0.01	0.015	0.025	0.031	0.039	0.057	0.064	0.065	
RPM	7958				5836	5173	4456	3714	2785	2228	1857					
FEED	159				175	259	276	290	318	285	241					
11.1 - 11.2	High alloyed steel, and tool steel				1.0D	0.5D (Up to Ø3 : 0.2D)	Vc	30	35	40	40	45	45	40	45	
							fz	0.01	0.016	0.025	0.031	0.041	0.05	0.05	0.048	
RPM		4775	3714	3183			2546	2387	1790	1273	1194					
FEED		95	119	159			158	196	179	127	115					
M		14.1	Stainless steel	1.0D			0.5D (Up to Ø3 : 0.2D)	Vc	25	30	35	35	35	35	35	35
								fz	0.009	0.016	0.025	0.031	0.04	0.053	0.059	0.058
	RPM				3979	3183		2785	2228	1857	1393	1114	928			
	FEED				72	102		139	138	149	148	131	108			
K	15-20	Grey cast iron Nodular cast iron Malleable cast iron	1.0D	1.0D	Vc	60	55	60	55	55	55	60	55			
					fz	0.012	0.018	0.024	0.03	0.043	0.063	0.077	0.102			
					RPM	9549	5836	4775	3501	2918	2188	1910	1459			
					FEED	229	210	229	210	251	276	294	298			
N	21~22	Aluminum- wrought alloy	1.0D	1.0D	Vc	140	145	140	145	145	145	145	140			
					fz	0.01	0.015	0.021	0.025	0.032	0.043	0.053	0.065			
					RPM	22282	15385	11141	9231	7692	5769	4615	3714			
					FEED	446	462	468	462	492	496	489	483			
	23~25	Aluminum-cast, alloyed	1.0D	1.0D	Vc	140	145	140	145	145	145	145	140			
					fz	0.01	0.015	0.021	0.025	0.032	0.043	0.053	0.065			
					RPM	22282	15385	11141	9231	7692	5769	4615	3714			
					FEED	446	462	468	462	492	496	489	483			
	26-28	Copper and Copper Alloys (Bronze / Brass)	1.0D	1.0D	Vc	105	105	110	105	105	110	105	105			
					fz	0.01	0.015	0.019	0.025	0.033	0.043	0.055	0.066			
					RPM	16711	11141	8754	6685	5570	4377	3342	2785			
					FEED	334	334	333	334	368	376	368	368			
29.1	Non Metallic Materials	1.0D	1.0D	Vc	105	105	110	105	105	110	105	105				
				fz	0.01	0.015	0.019	0.025	0.033	0.043	0.055	0.066				
				RPM	16711	11141	8754	6685	5570	4377	3342	2785				
				FEED	334	334	333	334	368	376	368	368				
H	40	Chilled Cast Iron	1.0D	1.0D	Vc	30	35	40	40	45	45	40	45			
					fz	0.01	0.016	0.025	0.031	0.041	0.05	0.05	0.048			
					RPM	4775	3714	3183	2546	2387	1790	1273	1194			
					FEED	95	119	159	158	196	179	127	115			

※ The FEED, in long & extra long types, should be reduced by around 50%




## G9B84, G9B85 SERIES

Vc = m/min.  
 fz = mm/tooth  
 RPM = rev./min.  
 FEED = mm/min.

### 4 FLUTE CORNER RADIUS - SIDE CUTTING

ISO	VDI 3323	Material Description	Ae	Ap	Parameter	Mill Diameter (Ø)									
						1.0	1.5	2.0	3.0	4.0	5.0	6.0	8.0	10.0	12.0
P	1-4	Non-alloy steel	0.1D	1.0D	Vc	55	55	60	70	80	85	90	90	85	90
					fz	0.002	0.005	0.006	0.009	0.019	0.024	0.029	0.043	0.047	0.047
					RPM	17507	11671	9549	7427	6366	5411	4775	3581	2706	2387
					FEED	140	233	229	267	484	519	554	616	509	449
	5	Non-alloy steel	0.1D	1.0D	Vc	30	35	40	45	50	50	55	55	55	55
					fz	0.002	0.004	0.006	0.009	0.019	0.024	0.031	0.038	0.038	0.037
					RPM	9549	7427	6366	4775	3979	3183	2918	2188	1751	1459
					FEED	76	119	153	172	302	306	362	333	266	216
	6-7	Low alloy steel	0.1D	1.0D	Vc	55	55	60	70	80	85	90	90	85	90
					fz	0.002	0.005	0.006	0.009	0.019	0.024	0.029	0.043	0.047	0.047
					RPM	17507	11671	9549	7427	6366	5411	4775	3581	2706	2387
					FEED	140	233	229	267	484	519	554	616	509	449
8-9	Low alloy steel	0.1D	1.0D	Vc	30	35	40	45	50	50	55	55	55	55	
				fz	0.002	0.004	0.006	0.009	0.019	0.024	0.031	0.038	0.038	0.037	
				RPM	9549	7427	6366	4775	3979	3183	2918	2188	1751	1459	
				FEED	76	119	153	172	302	306	362	333	266	216	
10	High alloyed steel, and tool steel	0.1D	1.0D	Vc	55	55	60	70	80	85	90	90	85	90	
				fz	0.002	0.005	0.006	0.009	0.019	0.024	0.029	0.043	0.047	0.047	
				RPM	17507	11671	9549	7427	6366	5411	4775	3581	2706	2387	
				FEED	140	233	229	267	484	519	554	616	509	449	
11.1 - 11.2	High alloyed steel, and tool steel	0.1D	1.0D	Vc	30	35	40	45	50	50	55	55	55	55	
				fz	0.002	0.004	0.006	0.009	0.019	0.024	0.031	0.038	0.038	0.037	
				RPM	9549	7427	6366	4775	3979	3183	2918	2188	1751	1459	
				FEED	76	119	153	172	302	306	362	333	266	216	
M	14.1	Stainless steel	0.1D	1.0D	Vc	25	35	35	35	40	40	45	45	45	45
fz	0.002	0.004	0.006	0.009	0.018	0.024	0.029	0.042	0.044	0.045					
RPM	7958	7427	5570	3714	3183	2546	2387	1790	1432	1194					
FEED	64	119	134	134	229	244	277	301	252	215					
K	15-20	Grey cast iron Nodular cast iron Malleable cast iron	1.0D	1.0D	Vc	60	55	60	55	60	55	55	55	60	55
fz	0.008	0.013	0.017	0.026	0.035	0.044	0.065	0.093	0.116	0.155					
RPM	19099	11671	9549	5836	4775	3501	2918	2188	1910	1459					
FEED	611	607	649	607	668	616	759	814	886	905					
N	21~22	Aluminum-wrought alloy	1.0D	1.0D	Vc	140	130	140	145	140	145	145	145	145	140
					fz	0.006	0.011	0.015	0.021	0.03	0.036	0.047	0.063	0.078	0.095
					RPM	44563	27587	22282	15385	11141	9231	7692	5769	4615	3714
					FEED	1070	1214	1337	1292	1337	1329	1446	1454	1440	1411
	23~25	Aluminum-cast, alloyed	1.0D	1.0D	Vc	140	130	140	145	140	145	145	145	145	140
					fz	0.006	0.011	0.015	0.021	0.03	0.036	0.047	0.063	0.078	0.095
					RPM	44563	27587	22282	15385	11141	9231	7692	5769	4615	3714
					FEED	1070	1214	1337	1292	1337	1329	1446	1454	1440	1411
	26-28	Copper and Copper Alloys (Bronze / Brass)	1.0D	1.0D	Vc	80	95	105	105	110	105	105	110	105	105
					fz	0.006	0.011	0.016	0.024	0.029	0.038	0.048	0.063	0.081	0.096
					RPM	25465	20160	16711	11141	8754	6685	5570	4377	3342	2785
					FEED	611	887	1070	1070	1015	1016	1070	1103	1083	1070
29.1	Non Metallic Materials	1.0D	1.0D	Vc	80	95	105	105	110	105	105	110	105	105	
				fz	0.006	0.011	0.016	0.024	0.029	0.038	0.048	0.063	0.081	0.096	
				RPM	25465	20160	16711	11141	8754	6685	5570	4377	3342	2785	
				FEED	611	887	1070	1070	1015	1016	1070	1103	1083	1070	
H	40	Chilled Cast Iron	1.0D	1.0D	Vc	30	35	40	45	50	55	55	55	55	
fz	0.002	0.004	0.006	0.009	0.019	0.024	0.031	0.038	0.038	0.037					
RPM	9549	7427	6366	4775	3979	3183	2918	2188	1751	1459					
FEED	76	119	153	172	302	306	362	333	266	216					

※ The FEED, in long & extra long types, should be reduced by around 50%




**G9424, G9G44, G9A68, G9444, G9527, G9445, G9G45, G9452 SERIES**

Vc = m/min.  
fz = mm/tooth  
RPM = rev./min.  
FEED = mm/min.

**2 FLUTE - SLOTTING**

ISO	VDI 3323	Material Description	Ae	Ap	Parameter	Mill Diameter (Ø)															
						1.0	1.5	2.0	3.0	4.0	5.0	6.0	8.0	10.0	12.0	14.0	16.0	20.0			
P	1-4	Non-alloy steel	1.0D	0.5D (Up to Ø3: 0.2D)	Vc	45	45	50	55	65	70	70	70	70	70	75	75	70			
					fz	0.004	0.008	0.01	0.015	0.025	0.031	0.039	0.057	0.064	0.065	0.063	0.062	0.063			
	RPM		14324	9549	7958	5836	5173	4456	3714	2785	2228	1857	1705	1492	1114						
	FEED		115	153	159	175	259	276	290	318	285	241	215	185	140						
	5	Low alloy steel	1.0D	0.5D (Up to Ø3: 0.2D)	Vc	25	25	30	35	40	40	45	45	40	45	45	50	45			
					fz	0.004	0.008	0.01	0.016	0.025	0.031	0.041	0.05	0.05	0.048	0.048	0.05	0.05			
	RPM		7958	5305	4775	3714	3183	2546	2387	1790	1273	1194	1023	995	716						
	FEED		64	85	95	119	159	158	196	179	127	115	98	99	72						
	6-7	Low alloy steel	1.0D	0.5D (Up to Ø3: 0.2D)	Vc	45	45	50	55	65	70	70	70	70	70	75	75	70			
					fz	0.004	0.008	0.01	0.015	0.025	0.031	0.039	0.057	0.064	0.065	0.063	0.062	0.063			
	RPM		14324	9549	7958	5836	5173	4456	3714	2785	2228	1857	1705	1492	1114						
	FEED		115	153	159	175	259	276	290	318	285	241	215	185	140						
8-9	Low alloy steel	1.0D	0.5D (Up to Ø3: 0.2D)	Vc	25	25	30	35	40	40	45	45	40	45	45	50	45				
				fz	0.004	0.008	0.01	0.016	0.025	0.031	0.041	0.05	0.05	0.048	0.048	0.05	0.05				
RPM		7958	5305	4775	3714	3183	2546	2387	1790	1273	1194	1023	995	716							
FEED		64	85	95	119	159	158	196	179	127	115	98	99	72							
10	High alloyed steel, and tool steel	1.0D	0.5D (Up to Ø3: 0.2D)	Vc	45	45	50	55	65	70	70	70	70	70	75	75	70				
				fz	0.004	0.008	0.01	0.015	0.025	0.031	0.039	0.057	0.064	0.065	0.063	0.062	0.063				
RPM		14324	9549	7958	5836	5173	4456	3714	2785	2228	1857	1705	1492	1114							
FEED		115	153	159	175	259	276	290	318	285	241	215	185	140							
11.1 - 11.2	High alloyed steel, and tool steel	1.0D	0.5D (Up to Ø3: 0.2D)	Vc	25	25	30	35	40	40	45	45	40	45	45	50	45				
				fz	0.004	0.008	0.01	0.016	0.025	0.031	0.041	0.05	0.05	0.048	0.048	0.05	0.05				
RPM		7958	5305	4775	3714	3183	2546	2387	1790	1273	1194	1023	995	716							
FEED		64	85	95	119	159	158	196	179	127	115	98	99	72							
M	14.1	Stainless steel	1.0D	0.5D (Up to Ø3: 0.2D)	Vc	20	25	25	30	35	35	35	35	35	35	35	35				
					fz	0.003	0.007	0.009	0.016	0.025	0.031	0.04	0.053	0.059	0.058	0.059	0.068	0.064			
					RPM	6366	5305	3979	3183	2785	2228	1857	1393	1114	928	796	696	557			
					FEED	38	74	72	102	139	138	149	148	131	108	94	95	71			
K	15-20	Grey cast iron Nodular cast iron Malleable cast iron	1.0D	1.0D	Vc	60	55	60	55	60	55	55	55	60	55	55	55				
					fz	0.005	0.008	0.012	0.018	0.024	0.03	0.043	0.063	0.077	0.102	0.119	0.145	0.189			
					RPM	19099	11671	9549	5836	4775	3501	2918	2188	1910	1459	1251	1094	875			
					FEED	191	187	229	210	229	210	251	276	294	298	298	317	331			
N	21~22	Aluminum-wrought alloy	1.0D	1.0D	Vc	140	130	140	145	140	145	145	145	145	140	145	145	140			
					fz	0.004	0.007	0.01	0.015	0.021	0.025	0.032	0.043	0.053	0.065	0.073	0.085	0.11			
					RPM	44563	27587	22282	15385	11141	9231	7692	5769	4615	3714	3297	2885	2228			
					FEED	357	386	446	462	468	462	492	496	489	483	481	490	490			
	23~25	Aluminum-cast, alloyed	1.0D	1.0D	Vc	140	130	140	145	140	145	145	145	145	140	145	145	140			
					fz	0.004	0.007	0.01	0.015	0.021	0.025	0.032	0.043	0.053	0.065	0.073	0.085	0.11			
					RPM	44563	27587	22282	15385	11141	9231	7692	5769	4615	3714	3297	2885	2228			
					FEED	357	386	446	462	468	462	492	496	489	483	481	490	490			
	26-28	Copper and Copper Alloys (Bronze / Brass)	1.0D	1.0D	Vc	80	95	105	105	110	105	105	110	105	105	105	110	105			
					fz	0.004	0.007	0.01	0.015	0.019	0.025	0.033	0.043	0.055	0.066	0.078	0.085	0.11			
					RPM	25465	20160	16711	11141	8754	6685	5570	4377	3342	2785	2387	2188	1671			
					FEED	204	282	334	334	333	334	368	376	368	368	372	372	368			
	29.1	Non Metallic Materials	1.0D	1.0D	Vc	80	95	105	105	110	105	105	110	105	105	105	110	105			
					fz	0.004	0.007	0.01	0.015	0.019	0.025	0.033	0.043	0.055	0.066	0.078	0.085	0.11			
					RPM	25465	20160	16711	11141	8754	6685	5570	4377	3342	2785	2387	2188	1671			
					FEED	204	282	334	334	333	334	368	376	368	368	372	372	368			
H	40	Chilled Cast Iron	1.0D	0.5D (Up to Ø3: 0.2D)	Vc	25	25	30	35	40	40	45	45	40	45	45	50	45			
					fz	0.004	0.008	0.01	0.016	0.025	0.031	0.041	0.05	0.05	0.048	0.048	0.05	0.05			
					RPM	7958	5305	4775	3714	3183	2546	2387	1790	1273	1194	1023	995	716			
					FEED	64	85	95	119	159	158	196	179	127	115	98	99	72			

※ The FEED, in long & extra long types, should be reduced by around 50%



## G9B80 SERIES


Vc = m/min.  
 fz = mm/tooth  
 RPM = rev./min.  
 FEED = mm/min.  
 Ap = mm

### 2 FLUTE - SLOTTING

ISO	VDI 3323	Material Description	Parameter	Mill Diameter (Ø)								
				0.4	0.5	0.6	0.7	0.8	0.9	1.0		
P	1-4	Non-alloy steel	Vc	33~43	42~53	50~64	58~75	58~75	61~76	60~75		
			fz	0.003~0.005	0.003~0.005	0.004~0.007	0.004~0.007	0.005~0.009	0.006~0.011	0.006~0.014		
			RPM	26500~34000	26500~34000	26500~34000	26500~34000	23000~30000	21500~27000	19000~24000		
			FEED	170~370	170~370	210~485	210~485	240~535	240~610	240~690		
			Ap	0.007~0.018	0.009~0.022	0.011~0.026	0.012~0.031	0.014~0.035	0.030~0.060	0.045~0.090		
			5	Non-alloy steel	Vc	24~30	30~38	36~45	42~53	41~53	42~54	42~53
					fz	0.002~0.006	0.002~0.006	0.003~0.008	0.003~0.008	0.003~0.010	0.005~0.012	0.006~0.015
					RPM	19000~24000	19000~24000	19000~24000	19000~24000	16500~21000	15000~19000	13500~17000
	FEED	72~290			72~290	95~365	95~365	100~410	135~460	160~510		
	Ap	0.007~0.018			0.009~0.022	0.011~0.026	0.012~0.031	0.014~0.035	0.030~0.060	0.045~0.090		
	6-7	Low alloy steel			Vc	33~43	42~53	50~64	58~75	58~75	61~76	60~75
					fz	0.003~0.005	0.003~0.005	0.004~0.007	0.004~0.007	0.005~0.009	0.006~0.011	0.006~0.014
					RPM	26500~34000	26500~34000	26500~34000	26500~34000	23000~30000	21500~27000	19000~24000
			FEED	170~370	170~370	210~485	210~485	240~535	240~610	240~690		
			Ap	0.007~0.018	0.009~0.022	0.011~0.026	0.012~0.031	0.014~0.035	0.030~0.060	0.045~0.090		
			8-9	Low alloy steel	Vc	24~30	30~38	36~45	42~53	41~53	42~54	42~53
					fz	0.002~0.006	0.002~0.006	0.003~0.008	0.003~0.008	0.003~0.010	0.005~0.012	0.006~0.015
					RPM	19000~24000	19000~24000	19000~24000	19000~24000	16500~21000	15000~19000	13500~17000
	FEED	72~290			72~290	95~365	95~365	100~410	135~460	160~510		
	Ap	0.007~0.018			0.009~0.022	0.011~0.026	0.012~0.031	0.014~0.035	0.030~0.060	0.045~0.090		
	10	High alloyed steel, and tool steel			Vc	33~43	42~53	50~64	58~75	58~75	61~76	60~75
					fz	0.003~0.005	0.003~0.005	0.004~0.007	0.004~0.007	0.005~0.009	0.006~0.011	0.006~0.014
					RPM	26500~34000	26500~34000	26500~34000	26500~34000	23000~30000	21500~27000	19000~24000
			FEED	170~370	170~370	210~485	210~485	240~535	240~610	240~690		
Ap			0.007~0.018	0.009~0.022	0.011~0.026	0.012~0.031	0.014~0.035	0.030~0.060	0.045~0.090			
11.1 - 11.2			High alloyed steel, and tool steel	Vc	24~30	30~38	36~45	42~53	41~53	42~54	42~53	
				fz	0.002~0.006	0.002~0.006	0.003~0.008	0.003~0.008	0.003~0.010	0.005~0.012	0.006~0.015	
				RPM	19000~24000	19000~24000	19000~24000	19000~24000	16500~21000	15000~19000	13500~17000	
	FEED	72~290		72~290	95~365	95~365	100~410	135~460	160~510			
	Ap	0.007~0.018		0.009~0.022	0.011~0.026	0.012~0.031	0.014~0.035	0.030~0.060	0.045~0.090			

※ The FEED, in long & extra long types, should be reduced by around 50%

▶ NEXT PAGE

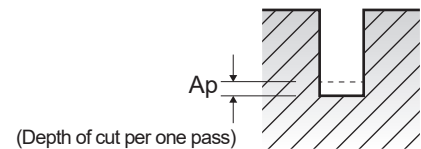




## G9B80 SERIES

Vc = m/min.  
 fz = mm/tooth  
 RPM = rev./min.  
 FEED = mm/min.  
 Ap = mm

### 2 FLUTE - SLOTTING

VDI 3323	Material Description	Parameter	Mill Diameter (Ø)								
			1.2	1.4	1.5	1.6	1.8	2.0	2.5	3.0	4.0
1-4	Non-alloy steel	Vc	58~72	60~75	59~73	60~75	62~79	63~79	63~79	64~80	64~82
		fz	0.008~0.020	0.009~0.023	0.010~0.025	0.010~0.026	0.011~0.027	0.012~0.031	0.015~0.038	0.018~0.045	0.024~0.059
		RPM	15500~19000	13600~17000	12500~15500	12000~15000	11000~14000	10000~12500	8000~10000	6800~8500	5100~6500
		FEED	240~765	240~765	240~765	240~765	240~765	240~765	240~765	240~765	240~765
		Ap	0.055~0.100	0.062~0.125	0.070~0.135	0.075~0.145	0.080~0.160	0.090~0.180	0.112~0.235	0.135~0.270	0.180~0.360
5	Non-alloy steel	Vc	41~53	43~53	42~54	44~55	44~55	44~56	45~57	44~57	44~57
		fz	0.007~0.018	0.008~0.021	0.009~0.022	0.009~0.023	0.010~0.026	0.011~0.028	0.014~0.035	0.017~0.043	0.023~0.057
		RPM	11000~14000	9800~12000	8950~11500	8700~10900	7800~9800	7000~8950	5700~7200	4700~6000	3500~4500
		FEED	160~510	160~510	160~510	160~510	160~510	160~510	160~510	160~510	160~510
		Ap	0.055~0.100	0.062~0.125	0.070~0.135	0.075~0.145	0.080~0.160	0.090~0.180	0.112~0.235	0.135~0.270	0.180~0.360
6-7	Low alloy steel	Vc	58~72	60~75	59~73	60~75	62~79	63~79	63~79	64~80	64~82
		fz	0.008~0.020	0.009~0.023	0.010~0.025	0.010~0.026	0.011~0.027	0.012~0.031	0.015~0.038	0.018~0.045	0.024~0.059
		RPM	15500~19000	13600~17000	12500~15500	12000~15000	11000~14000	10000~12500	8000~10000	6800~8500	5100~6500
		FEED	240~765	240~765	240~765	240~765	240~765	240~765	240~765	240~765	240~765
		Ap	0.055~0.100	0.062~0.125	0.070~0.135	0.075~0.145	0.080~0.160	0.090~0.180	0.112~0.235	0.135~0.270	0.180~0.360
8-9	Low alloy steel	Vc	41~53	43~53	42~54	44~55	44~55	44~56	45~57	44~57	44~57
		fz	0.007~0.018	0.008~0.021	0.009~0.022	0.009~0.023	0.010~0.026	0.011~0.028	0.014~0.035	0.017~0.043	0.023~0.057
		RPM	11000~14000	9800~12000	8950~11500	8700~10900	7800~9800	7000~8950	5700~7200	4700~6000	3500~4500
		FEED	160~510	160~510	160~510	160~510	160~510	160~510	160~510	160~510	160~510
		Ap	0.055~0.100	0.062~0.125	0.070~0.135	0.075~0.145	0.080~0.160	0.090~0.180	0.112~0.235	0.135~0.270	0.180~0.360
10	High alloyed steel, and tool steel	Vc	58~72	60~75	59~73	60~75	62~79	63~79	63~79	64~80	64~82
		fz	0.008~0.020	0.009~0.023	0.010~0.025	0.010~0.026	0.011~0.027	0.012~0.031	0.015~0.038	0.018~0.045	0.024~0.059
		RPM	15500~19000	13600~17000	12500~15500	12000~15000	11000~14000	10000~12500	8000~10000	6800~8500	5100~6500
		FEED	240~765	240~765	240~765	240~765	240~765	240~765	240~765	240~765	240~765
		Ap	0.055~0.100	0.062~0.125	0.070~0.135	0.075~0.145	0.080~0.160	0.090~0.180	0.112~0.235	0.135~0.270	0.180~0.360
11.1 - 11.2	High alloyed steel, and tool steel	Vc	41~53	43~53	42~54	44~55	44~55	44~56	45~57	44~57	44~57
		fz	0.007~0.018	0.008~0.021	0.009~0.022	0.009~0.023	0.010~0.026	0.011~0.028	0.014~0.035	0.017~0.043	0.023~0.057
		RPM	11000~14000	9800~12000	8950~11500	8700~10900	7800~9800	7000~8950	5700~7200	4700~6000	3500~4500
		FEED	160~510	160~510	160~510	160~510	160~510	160~510	160~510	160~510	
		Ap	0.055~0.100	0.062~0.125	0.070~0.135	0.075~0.145	0.080~0.160	0.090~0.180	0.112~0.235	0.135~0.270	0.180~0.360

※ The FEED, in long & extra long types, should be reduced by around 50%

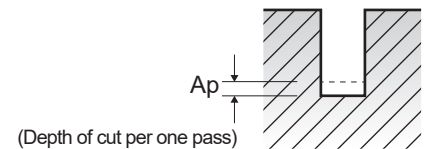

## G9553, G9G46, G9410, G9425, G9G47, G9439


## G9528, G9433, G9G48, G9447, G9G49 SERIES

Vc = m/min.  
 fz = mm/tooth  
 RPM = rev./min.  
 FEED = mm/min.

### 3 FLUTE - SLOTTING

ISO	VDI 3323	Material Description	Ae	Ap	Parameter	Mill Diameter (Ø)															
						1.0	1.5	2.0	3.0	4.0	5.0	6.0	8.0	10.0	12.0	14.0	16.0	20.0			
P	1-4	Non-alloy steel	1.0D	0.5D (Up to Ø3 : 0.2D)	Vc	45	60	50	55	65	70	70	70	70	70	75	75	70			
					fz	0.002	0.003	0.005	0.007	0.012	0.015	0.018	0.027	0.03	0.031	0.029	0.029	0.029			
					RPM	14324	12732	7958	5836	5173	4456	3714	2785	2228	1857	1705	1492	1114			
	FEED		86	115	119	123	186	201	201	226	201	173	148	130	97						
	5		1.0D	0.5D (Up to Ø3 : 0.2D)	Vc	25	25	30	35	40	40	45	45	40	45	45	50	45			
					fz	0.002	0.004	0.005	0.007	0.012	0.014	0.02	0.024	0.023	0.022	0.022	0.023	0.024			
		RPM			7958	5305	4775	3714	3183	2546	2387	1790	1273	1194	1023	995	716				
	6-7	1.0D	0.5D (Up to Ø3 : 0.2D)	Vc	45	60	50	55	65	70	70	70	70	70	75	75	70				
				fz	0.002	0.003	0.005	0.007	0.012	0.015	0.018	0.027	0.03	0.031	0.029	0.029	0.029				
				RPM	14324	12732	7958	5836	5173	4456	3714	2785	2228	1857	1705	1492	1114				
	8-9	1.0D	0.5D (Up to Ø3 : 0.2D)	Vc	25	25	30	35	40	40	45	45	40	45	45	50	45				
				fz	0.002	0.004	0.005	0.007	0.012	0.014	0.02	0.024	0.023	0.022	0.022	0.023	0.024				
RPM				7958	5305	4775	3714	3183	2546	2387	1790	1273	1194	1023	995	716					
10	1.0D	0.5D (Up to Ø3 : 0.2D)	Vc	45	60	50	55	65	70	70	70	70	70	75	75	70					
			fz	0.002	0.003	0.005	0.007	0.012	0.015	0.018	0.027	0.03	0.031	0.029	0.029	0.029					
			RPM	14324	12732	7958	5836	5173	4456	3714	2785	2228	1857	1705	1492	1114					
11.1 - 11.2	1.0D	0.5D (Up to Ø3 : 0.2D)	Vc	25	25	30	35	40	40	45	45	40	45	45	50	45					
			fz	0.002	0.004	0.005	0.007	0.012	0.014	0.02	0.024	0.023	0.022	0.022	0.023	0.024					
			RPM	7958	5305	4775	3714	3183	2546	2387	1790	1273	1194	1023	995	716					
M	14.1	Stainless steel	1.0D	0.5D (Up to Ø3 : 0.2D)	Vc	20	25	25	30	35	35	35	35	35	35	35	35				
					fz	0.002	0.003	0.004	0.007	0.011	0.015	0.019	0.025	0.028	0.026	0.027	0.031	0.03			
					RPM	6366	5305	3979	3183	2785	2228	1857	1393	1114	928	796	696	557			
K	15-20	Grey cast iron Nodular cast iron Malleable cast iron	1.0D	1.0D	Vc	60	55	60	55	60	55	55	55	60	55	55	55				
					fz	0.003	0.005	0.007	0.011	0.013	0.018	0.026	0.036	0.046	0.063	0.073	0.086	0.115			
					RPM	19099	11671	9549	5836	4775	3501	2918	2188	1910	1459	1251	1094	875			
N	21~22	Aluminum-wrought alloy	1.0D	1.0D	Vc	140	130	140	145	140	145	145	145	145	140	145	145	140			
					fz	0.002	0.004	0.006	0.009	0.013	0.015	0.019	0.026	0.032	0.038	0.043	0.05	0.065			
					RPM	44563	27587	22282	15385	11141	9231	7692	5769	4615	3714	3297	2885	2228			
	FEED		267	331	401	415	434	415	438	450	443	423	425	433	434						
	23~25		1.0D	1.0D	Vc	140	130	140	145	140	145	145	145	145	140	145	145	140			
					fz	0.002	0.004	0.006	0.009	0.013	0.015	0.019	0.026	0.032	0.038	0.043	0.05	0.065			
		RPM			44563	27587	22282	15385	11141	9231	7692	5769	4615	3714	3297	2885	2228				
	26-28	1.0D	1.0D	Vc	80	95	105	105	110	105	105	110	105	105	105	110	105				
				fz	0.002	0.004	0.006	0.009	0.012	0.015	0.02	0.025	0.032	0.039	0.046	0.05	0.065				
				RPM	25465	20160	16711	11141	8754	6685	5570	4377	3342	2785	2387	2188	1671				
	29.1	1.0D	1.0D	Vc	80	95	105	105	110	105	105	110	105	105	105	110	105				
				fz	0.002	0.004	0.006	0.009	0.012	0.015	0.02	0.025	0.032	0.039	0.046	0.05	0.065				
RPM				25465	20160	16711	11141	8754	6685	5570	4377	3342	2785	2387	2188	1671					
H	40	Chilled Cast Iron	1.0D	1.0D	Vc	25	25	30	35	40	40	45	45	40	45	45	50	45			
					fz	0.002	0.004	0.005	0.007	0.012	0.014	0.02	0.024	0.023	0.022	0.022	0.023	0.024			
					RPM	7958	5305	4775	3714	3183	2546	2387	1790	1273	1194	1023	995	716			
					FEED	48	64	72	78	115	107	143	129	88	79	68	69	52			

※ The FEED, in long & extra long types, should be reduced by around 50%



**G9553, G9G46, G9410, G9425, G9G47, G9439**


**G9528, G9433, G9G48, G9447, G9G49 SERIES**

Vc = m/min.  
 fz = mm/tooth  
 RPM = rev./min.  
 FEED = mm/min.

**3 FLUTE - SIDE CUTTING**

ISO	VDI 3323	Material Description	Ae	Ap	Parameter	Mill Diameter (Ø)															
						1.0	1.5	2.0	3.0	4.0	5.0	6.0	8.0	10.0	12.0	14.0	16.0	20.0			
P	1-4	Non-alloy steel	0.1D	1.0D	Vc	55	55	60	70	80	85	90	90	85	90	90	95	90			
					fz	0.002	0.005	0.006	0.009	0.019	0.024	0.03	0.042	0.047	0.047	0.047	0.047	0.048	0.047		
					RPM	17507	11671	9549	7427	6366	5411	4775	3581	2706	2387	2046	1890	1432			
	FEED		105	175	172	201	363	390	430	451	381	337	289	272	202						
	5		Low alloy steel	0.1D	1.0D	Vc	30	35	40	45	50	55	55	55	55	55	60	55			
						fz	0.002	0.004	0.006	0.009	0.019	0.024	0.031	0.038	0.038	0.037	0.037	0.038	0.037		
		RPM				9549	7427	6366	4775	3979	3183	2918	2188	1751	1459	1251	1194	875			
	FEED	57		89	115	129	227	229	271	249	200	162	139	136	97						
	6-7	High alloyed steel, and tool steel		0.1D	1.0D	Vc	55	55	60	70	80	85	90	90	85	90	90	95	90		
						fz	0.002	0.005	0.006	0.009	0.019	0.024	0.03	0.042	0.047	0.047	0.047	0.048	0.047		
			RPM			17507	11671	9549	7427	6366	5411	4775	3581	2706	2387	2046	1890	1432			
	FEED		105	175	172	201	363	390	430	451	381	337	289	272	202						
8-9	Stainless steel		0.1D	1.0D	Vc	30	35	40	45	50	55	55	55	55	55	60	55				
					fz	0.002	0.004	0.006	0.009	0.019	0.024	0.031	0.038	0.038	0.037	0.037	0.038	0.037			
		RPM			9549	7427	6366	4775	3979	3183	2918	2188	1751	1459	1251	1194	875				
FEED		57	89	115	129	227	229	271	249	200	162	139	136	97							
10		Grey cast iron Nodular cast iron Malleable cast iron	0.1D	1.0D	Vc	55	55	60	70	80	85	90	90	85	90	90	95	90			
					fz	0.002	0.005	0.006	0.009	0.019	0.024	0.03	0.042	0.047	0.047	0.047	0.048	0.047			
	RPM				17507	11671	9549	7427	6366	5411	4775	3581	2706	2387	2046	1890	1432				
FEED	105		175	172	201	363	390	430	451	381	337	289	272	202							
11.1 - 11.2	Aluminum-wrought alloy		0.1D	1.0D	Vc	30	35	40	45	50	55	55	55	55	55	60	55				
					fz	0.002	0.004	0.006	0.009	0.019	0.024	0.031	0.038	0.038	0.037	0.037	0.038	0.037			
		RPM			9549	7427	6366	4775	3979	3183	2918	2188	1751	1459	1251	1194	875				
FEED		57	89	115	129	227	229	271	249	200	162	139	136	97							
M		Aluminum-cast, alloyed	0.1D	1.0D	Vc	25	35	35	35	40	40	45	45	45	45	45	45	45			
					fz	0.002	0.004	0.006	0.009	0.018	0.024	0.03	0.042	0.045	0.045	0.044	0.048	0.048			
	RPM				7958	7427	5570	3714	3183	2546	2387	1790	1432	1194	1023	895	716				
FEED	48		89	100	100	172	183	215	226	193	161	135	129	103							
K	Aluminum-cast, alloyed		0.1D	1.5D	Vc	60	55	60	55	60	55	55	55	60	55	55	55	55			
					fz	0.008	0.013	0.017	0.026	0.035	0.044	0.064	0.093	0.115	0.154	0.181	0.22	0.285			
		RPM			19099	11671	9549	5836	4775	3501	2918	2188	1751	1459	1251	1094	875				
FEED		458	455	487	455	501	462	560	611	659	674	679	722	748							
N		Copper and Copper Alloys (Bronze / Brass)	0.1D	1.5D	Vc	140	130	140	145	140	145	145	145	145	140	145	145	140			
					fz	0.006	0.01	0.016	0.021	0.031	0.037	0.048	0.064	0.08	0.098	0.111	0.129	0.167			
	RPM				44563	27587	22282	15385	11141	9231	7692	5769	4615	3714	3297	2885	2228				
FEED	802		828	1070	969	1036	1025	1108	1108	1108	1092	1098	1116	1116							
21~22	Non Metallic Materials		0.1D	1.5D	Vc	140	130	140	145	140	145	145	145	145	140	145	145	140			
					fz	0.006	0.01	0.016	0.021	0.031	0.037	0.048	0.064	0.08	0.098	0.111	0.129	0.167			
		RPM			44563	27587	22282	15385	11141	9231	7692	5769	4615	3714	3297	2885	2228				
FEED		802	828	1070	969	1036	1025	1108	1108	1108	1092	1098	1116	1116							
23~25		Chilled Cast Iron	0.1D	1.5D	Vc	80	95	105	105	110	105	105	110	105	105	110	105	105			
					fz	0.006	0.011	0.016	0.023	0.029	0.037	0.048	0.063	0.081	0.096	0.115	0.125	0.162			
	RPM				25465	20160	16711	11141	8754	6685	5570	4377	3342	2785	2387	2188	1671				
FEED	458		665	802	769	762	742	802	827	812	802	824	821	812							
26-28	Chilled Cast Iron		0.1D	1.5D	Vc	80	95	105	105	110	105	105	110	105	105	110	105	105			
					fz	0.006	0.011	0.016	0.023	0.029	0.037	0.048	0.063	0.081	0.096	0.115	0.125	0.162			
		RPM			25465	20160	16711	11141	8754	6685	5570	4377	3342	2785	2387	2188	1671				
FEED		458	665	802	769	762	742	802	827	812	802	824	821	812							
29.1		Chilled Cast Iron	0.1D	1.0D	Vc	30	35	40	45	50	55	55	55	55	55	60	55				
					fz	0.002	0.004	0.006	0.009	0.019	0.024	0.031	0.038	0.038	0.037	0.037	0.038	0.037			
	RPM				9549	7427	6366	4775	3979	3183	2918	2188	1751	1459	1251	1194	875				
FEED	57		89	115	129	227	229	271	249	200	162	139	136	97							
H	Chilled Cast Iron		0.1D	1.0D	Vc	30	35	40	45	50	55	55	55	55	55	60	55				
					fz	0.002	0.004	0.006	0.009	0.019	0.024	0.031	0.038	0.038	0.037	0.037	0.038	0.037			
		RPM			9549	7427	6366	4775	3979	3183	2918	2188	1751	1459	1251	1194	875				
FEED		57	89	115	129	227	229	271	249	200	162	139	136	97							

※ The FEED, in long & extra long types, should be reduced by around 50%




## G9432, G9G50, G9A69, G9448, G9540, G9449, G9G51, G9453 SERIES

Vc = m/min.  
 fz = mm/tooth  
 RPM = rev./min.  
 FEED = mm/min.

### 4 FLUTE - SIDE CUTTING

ISO	VDI 3323	Material Description	Ae	Ap	Parameter	Mill Diameter (Ø)																																																																
						1.0	1.5	2.0	3.0	4.0	5.0	6.0	8.0	10.0	12.0	14.0	16.0	20.0																																																				
P	1-4	Non-alloy steel	0.1D	1.0D	Vc	55	55	60	70	80	85	90	90	85	90	90	95	90	fz	0.002	0.005	0.006	0.009	0.019	0.024	0.029	0.043	0.047	0.047	0.047	0.047	0.047	0.047	RPM	17507	11671	9549	7427	6366	5411	4775	3581	2706	2387	2046	1890	1432	FEED	140	233	229	267	484	519	554	616	509	449	385	355	269									
					5	0.1D	1.0D	Vc	30	35	40	45	50	50	55	55	55	55	55	60	55	fz	0.002	0.004	0.006	0.009	0.019	0.024	0.031	0.038	0.038	0.037	0.038	0.037	0.038	RPM	9549	7427	6366	4775	3979	3183	2918	2188	1751	1459	1251	1194	875	FEED	76	119	153	172	302	306	362	333	266	216	190	177	133							
								6-7	0.1D	1.0D	Vc	55	55	60	70	80	85	90	90	85	90	90	95	90	fz	0.002	0.005	0.006	0.009	0.019	0.024	0.029	0.043	0.047	0.047	0.047	0.047	0.047	RPM	17507	11671	9549	7427	6366	5411	4775	3581	2706	2387	2046	1890	1432	FEED	140	233	229	267	484	519	554	616	509	449	385	355	269				
											8-9	0.1D	1.0D	Vc	30	35	40	45	50	50	55	55	55	55	60	55	fz	0.002	0.004	0.006	0.009	0.019	0.024	0.031	0.038	0.038	0.037	0.038	0.037	0.038	RPM	9549	7427	6366	4775	3979	3183	2918	2188	1751	1459	1251	1194	875	FEED	76	119	153	172	302	306	362	333	266	216	190	177	133		
	10	High alloyed steel, and tool steel	0.1D	1.0D										Vc	55	55	60	70	80	85	90	90	85	90	90	95	90	fz	0.002	0.005	0.006	0.009	0.019	0.024	0.029	0.043	0.047	0.047	0.047	0.047	0.047	RPM	17507	11671	9549	7427	6366	5411	4775	3581	2706	2387	2046	1890	1432	FEED	140	233	229	267	484	519	554	616	509	449	385	355	269	
					11.1 - 11.2	0.1D	1.0D							Vc	30	35	40	45	50	50	55	55	55	55	60	55	fz	0.002	0.004	0.006	0.009	0.019	0.024	0.031	0.038	0.038	0.037	0.038	0.037	0.038	RPM	9549	7427	6366	4775	3979	3183	2918	2188	1751	1459	1251	1194	875	FEED	76	119	153	172	302	306	362	333	266	216	190	177	133		
								M	14.1	Stainless steel				0.1D	1.0D	Vc	25	35	35	35	40	40	45	45	45	45	50	45	fz	0.002	0.004	0.006	0.009	0.018	0.024	0.029	0.042	0.044	0.045	0.045	0.045	0.046	RPM	7958	7427	5570	3714	3183	2546	2387	1790	1432	1194	1023	995	716	FEED	64	119	134	134	229	244	277	301	252	215	184	179	132
											K	15-20	Grey cast iron Nodular cast iron Malleable cast iron			0.1D	1.5D	Vc	60	55	60	55	60	55	55	55	60	55	55	55	fz	0.008	0.013	0.017	0.026	0.035	0.044	0.065	0.093	0.116	0.155	0.182	0.22	0.288	RPM	19099	11671	9549	5836	4775	3501	2918	2188	1910	1459	1251	1094	875	FEED	611	607	649	607	668	616	759	814	886	905	910
	N	21~22	Aluminum- wrought alloy	0.1D														1.5D	Vc	140	130	140	145	140	145	145	145	145	145	145	140	fz	0.006	0.011	0.015	0.021	0.03	0.036	0.047	0.063	0.078	0.095	0.108	0.125	0.163	RPM	44563	27587	22282	15385	11141	9231	7692	5769	4615	3714	3297	2885	2228	FEED	1070	1214	1337	1292	1337	1329	1446	1454	1440	1411
					23~25	Aluminum-cast, alloyed	0.1D												1.5D	Vc	140	130	140	145	140	145	145	145	145	145	145	140	fz	0.006	0.011	0.015	0.021	0.03	0.036	0.047	0.063	0.078	0.095	0.108	0.125	0.163	RPM	44563	27587	22282	15385	11141	9231	7692	5769	4615	3714	3297	2885	2228	FEED	1070	1214	1337	1292	1337	1329	1446	1454	1440
								26-28	Copper and Copper Alloys (Bronze / Brass)	0.1D				1.5D	Vc					80	95	105	105	110	105	105	110	105	105	110	105	fz	0.006	0.011	0.016	0.024	0.029	0.038	0.048	0.063	0.081	0.096	0.115	0.125	0.162	RPM	25465	20160	16711	11141	8754	6685	5570	4377	3342	2785	2387	2188	1671	FEED	611	887	1070	1070	1015	1016	1070	1103	1083	1070
											29.1	Non Metallic Materials	0.1D		1.5D	Vc	80			95	105	105	110	105	105	110	105	105	110	105	fz	0.006	0.011	0.016	0.024	0.029	0.038	0.048	0.063	0.081	0.096	0.115	0.125	0.162	RPM	25465	20160	16711	11141	8754	6685	5570	4377	3342	2785	2387	2188	1671	FEED	611	887	1070	1070	1015	1016	1070	1103	1083	1070	1098
H	40	Chilled Cast Iron	0.1D	1.0D												Vc	30	35		40	45	50	50	55	55	55	55	60	55	fz	0.002	0.004	0.006	0.009	0.019	0.024	0.031	0.038	0.038	0.037	0.038	0.037	0.038	RPM	9549	7427	6366	4775	3979	3183	2918	2188	1751	1459	1251	1194	875	FEED	76	119	153	172	302	306	362	333	266	216	190	177

※ The FEED, in long & extra long types, should be reduced by around 50%




## G9F45, G9F46 SERIES

Vc = m/min.  
 fz = mm/tooth  
 RPM = rev./min.  
 FEED = mm/min.

### 4&6 FLUTE - SIDE CUTTING

ISO	VDI 3323	Material Description	Ae	Ap	Parameter	Mill Diameter (Ø)											
						3.0	4.0	5.0	6.0	8.0	10.0	12.0	14.0	16.0	18.0	20.0	
P	1-4	Non-alloy steel	0.05D	1.5D	Vc	82	83	98	98	97	97	99	98	98	97	97	
					fz	0.024	0.033	0.025	0.03	0.045	0.045	0.053	0.058	0.062	0.065	0.069	
	RPM		8700	6605	6239	5199	3860	3088	2626	2228	1950	1715	1544				
	FEED		835	872	936	936	1042	834	835	775	725	669	639				
	5		Non-alloy steel	0.03D	1.5D	Vc	54	55	65	65	65	64	66	66	65	65	64
						fz	0.024	0.033	0.027	0.03	0.038	0.045	0.053	0.057	0.062	0.066	0.07
	RPM	5730		4377	4138	3448	2586	2037	1751	1501	1293	1149	1019				
	FEED	550		578	670	621	590	550	557	513	481	455	428				
	6-7	Low alloy steel		0.05D	1.5D	Vc	82	83	98	98	97	97	99	98	98	97	97
						fz	0.024	0.033	0.025	0.03	0.045	0.045	0.053	0.058	0.062	0.065	0.069
	RPM		8700	6605	6239	5199	3860	3088	2626	2228	1950	1715	1544				
	FEED		835	872	936	936	1042	834	835	775	725	669	639				
8-9	Low alloy steel		0.03D	1.5D	Vc	54	55	65	65	65	64	66	66	65	65	64	
					fz	0.024	0.033	0.027	0.03	0.038	0.045	0.053	0.057	0.062	0.066	0.07	
RPM		5730	4377	4138	3448	2586	2037	1751	1501	1293	1149	1019					
FEED		550	578	670	621	590	550	557	513	481	455	428					
10		High alloyed steel, and tool steel	0.05D	1.5D	Vc	82	83	98	98	97	97	99	98	98	97	97	
					fz	0.024	0.033	0.025	0.03	0.045	0.045	0.053	0.058	0.062	0.065	0.069	
RPM	8700		6605	6239	5199	3860	3088	2626	2228	1950	1715	1544					
FEED	835		872	936	936	1042	834	835	775	725	669	639					
11.1 - 11.2	High alloyed steel, and tool steel		0.03D	1.5D	Vc	54	55	65	65	65	64	66	66	65	65	64	
					fz	0.024	0.033	0.027	0.03	0.038	0.045	0.053	0.057	0.062	0.066	0.07	
RPM		5730	4377	4138	3448	2586	2037	1751	1501	1293	1149	1019					
FEED		550	578	670	621	590	550	557	513	481	455	428					
K		15-20	Grey cast iron Nodular cast iron Malleable cast iron	0.05D	1.5D	Vc	82	83	98	98	97	97	99	98	98	97	97
						fz	0.024	0.033	0.025	0.03	0.045	0.045	0.053	0.058	0.062	0.065	0.069
	RPM	8700		6605	6239	5199	3860	3088	2626	2228	1950	1715	1544				
	FEED	835		872	936	936	1042	834	835	775	725	669	639				
	38.1	Hardened steel		0.03D	1.5D	Vc	54	55	65	65	65	64	66	66	65	65	64
						fz	0.024	0.033	0.027	0.03	0.038	0.045	0.053	0.057	0.062	0.066	0.07
	RPM		5730	4377	4138	3448	2586	2037	1751	1501	1293	1149	1019				
	FEED		550	578	670	621	590	550	557	513	481	455	428				
	38.2 ~ 39.1		Hardened steel	0.03D	1.5D	Vc	45	45	50	50	50	50	50	50	50	50	50
						fz	0.018	0.025	0.02	0.023	0.029	0.033	0.029	0.041	0.046	0.05	0.052
	RPM	4775		3581	3183	2653	1989	1592	1326	1137	995	884	796				
	FEED	344		358	382	366	346	315	231	280	275	265	248				
39.2	Hardened steel	0.02D		1D	Vc	35	35	40	40	40	40	40	40	40	40	41	
					fz	0.014	0.02	0.016	0.018	0.023	0.027	0.031	0.034	0.037	0.039	0.042	
RPM		3714	2785	2546	2122	1592	1273	1061	909	796	707	653					
FEED		208	223	244	229	220	206	197	186	177	166	164					
40		Chilled Cast Iron	0.03D	1.5D	Vc	54	55	65	65	65	64	66	66	65	65	64	
					fz	0.024	0.033	0.027	0.03	0.038	0.045	0.053	0.057	0.062	0.066	0.07	
RPM	5730		4377	4138	3448	2586	2037	1751	1501	1293	1149	1019					
FEED	550		578	670	621	590	550	557	513	481	455	428					
41	Hardened Cast Iron		0.03D	1.5D	Vc	45	45	50	50	50	50	50	50	50	50	50	
					fz	0.018	0.025	0.02	0.023	0.029	0.033	0.029	0.041	0.046	0.05	0.052	
RPM		4775	3581	3183	2653	1989	1592	1326	1137	995	884	796					
FEED		344	358	382	366	346	315	231	280	275	265	248					

※ The FEED, in long & extra long types, should be reduced by around 50%




## G9A42 SERIES

Vc = m/min.  
 fz = mm/tooth  
 RPM = rev./min.  
 FEED = mm/min.

### MULTI FLUTE ROUGHING - SIDE CUTTING

ISO	VDI 3323	Material Description	Ae	Ap	Parameter	Mill Diameter (Ø)								
						6.0	8.0	10.0	12.0	14.0	16.0	18.0	20.0	25.0
P	1-4	Non-alloy steel	0.3D	1.5D	Vc	250	250	245	255	255	255	250	260	285
					fz	0.05	0.067	0.063	0.075	0.088	0.1	0.112	0.112	0.1
	RPM		13263	9947	7799	6764	5798	5073	4421	4138	3629			
	FEED		1989	1999	1965	2029	2041	2029	1981	1854	1814			
	5	Non-alloy steel	0.3D	1.5D	Vc	200	195	205	190	195	205	210	190	210
					fz	0.022	0.023	0.028	0.033	0.04	0.04	0.041	0.039	0.039
	RPM		10610	7759	6525	5040	4434	4078	3714	3024	2674			
	FEED		700	535	731	665	709	653	609	472	521			
	6-7	Low alloy steel	0.3D	1.5D	Vc	250	250	245	255	255	255	250	260	285
					fz	0.05	0.067	0.063	0.075	0.088	0.1	0.112	0.112	0.1
	RPM		13263	9947	7799	6764	5798	5073	4421	4138	3629			
	FEED		1989	1999	1965	2029	2041	2029	1981	1854	1814			
8-9	Low alloy steel	0.3D	1.5D	Vc	200	195	205	190	195	205	210	190	210	
				fz	0.022	0.023	0.028	0.033	0.04	0.04	0.041	0.039	0.039	
RPM		10610	7759	6525	5040	4434	4078	3714	3024	2674				
FEED		700	535	731	665	709	653	609	472	521				
10	High alloyed steel, and tool steel	0.3D	1.5D	Vc	250	250	245	255	255	255	250	260	285	
				fz	0.05	0.067	0.063	0.075	0.088	0.1	0.112	0.112	0.1	
RPM		13263	9947	7799	6764	5798	5073	4421	4138	3629				
FEED		1989	1999	1965	2029	2041	2029	1981	1854	1814				
11.1 - 11.2	High alloyed steel, and tool steel	0.3D	1.5D	Vc	200	195	205	190	195	205	210	190	210	
				fz	0.022	0.023	0.028	0.033	0.04	0.04	0.041	0.039	0.039	
RPM		10610	7759	6525	5040	4434	4078	3714	3024	2674				
FEED		700	535	731	665	709	653	609	472	521				
M	14.1	Stainless steel	0.05D	1.0D	Vc	135	135	135	135	135	140	130	130	145
fz	0.022	0.022	0.028	0.034	0.039	0.038	0.039	0.038	0.038	0.038	0.038	0.038	0.038	
RPM	7162	5371	4297	3581	3069	2785	2299	2069	1846					
FEED	473	355	481	487	479	423	359	314	351					
S	31-35	Heat Resistant Super Alloys	0.05D	1.0D	Vc	40	40	35	40	35	35	35	35	40
fz	0.026	0.024	0.036	0.04	0.037	0.032	0.038	0.041	0.06					
RPM	2122	1592	1114	1061	796	619	557	509						
FEED	166	115	160	170	118	89	91	153						
H	40	Chilled Cast Iron	0.3D	1.5D	Vc	200	195	205	190	195	205	210	190	210
fz	0.022	0.023	0.028	0.033	0.04	0.04	0.041	0.039	0.039					
RPM	10610	7759	6525	5040	4434	4078	3714	3024	2674					
FEED	700	535	731	665	709	653	609	472	521					

※ The FEED, in long & extra long types, should be reduced by around 50%




## G9400 SERIES

Vc = m/min.  
 fz = mm/tooth  
 RPM = rev./min.  
 FEED = mm/min.

### 2 FLUTE DRILL MILLS - CHAMFERING

ISO	VDI 3323	Material Description	Parameter	Mill Diameter (Ø)								
				3.0	4.0	5.0	6.0	8.0	10.0	12.0	16.0	20.0
P	1-2	Non-alloy steel	Vc	60	65	65	60	60	65	70	70	85
			fz	0.025	0.031	0.04	0.052	0.071	0.083	0.1	0.125	0.137
			RPM	6366	5173	4138	3183	2387	2069	1857	1393	1353
			FEED	318	321	331	331	339	343	371	348	371
	3-4		Vc	45	55	55	55	55	55	60	65	65
			fz	0.023	0.027	0.036	0.043	0.058	0.073	0.091	0.105	0.14
			RPM	4775	4377	3501	2918	2188	1751	1592	1293	1035
			FEED	220	236	252	251	254	256	290	272	290
	5		Vc	40	45	45	40	40	50	50	50	55
			fz	0.023	0.028	0.035	0.044	0.06	0.066	0.083	0.115	0.134
			RPM	4244	3581	2865	2122	1592	1592	1326	995	875
			FEED	195	201	201	187	191	210	220	229	235
6	Vc	60	65	65	60	60	65	70	70	85		
	fz	0.025	0.031	0.04	0.052	0.071	0.083	0.1	0.125	0.137		
	RPM	6366	5173	4138	3183	2387	2069	1857	1393	1353		
	FEED	318	321	331	331	339	343	371	348	371		
7	Vc	45	55	55	55	55	55	60	65	65		
	fz	0.023	0.027	0.036	0.043	0.058	0.073	0.091	0.105	0.14		
	RPM	4775	4377	3501	2918	2188	1751	1592	1293	1035		
	FEED	220	236	252	251	254	256	290	272	290		
8-9	Vc	40	45	45	40	40	50	50	50	55		
	fz	0.023	0.028	0.035	0.044	0.06	0.066	0.083	0.115	0.134		
	RPM	4244	3581	2865	2122	1592	1592	1326	995	875		
	FEED	195	201	201	187	191	210	220	229	235		
10	Vc	60	65	65	60	60	65	70	70	85		
	fz	0.025	0.031	0.04	0.052	0.071	0.083	0.1	0.125	0.137		
	RPM	6366	5173	4138	3183	2387	2069	1857	1393	1353		
	FEED	318	321	331	331	339	343	371	348	371		
11.1	Vc	40	45	45	40	40	50	50	50	55		
	fz	0.023	0.028	0.035	0.044	0.06	0.066	0.083	0.115	0.134		
	RPM	4244	3581	2865	2122	1592	1592	1326	995	875		
	FEED	195	201	201	187	191	210	220	229	235		
M	14.1	Stainless steel	Vc	30	35	40	35	35	40	40	40	45
			fz	0.021	0.025	0.029	0.037	0.055	0.064	0.078	0.11	0.122
			RPM	3183	2785	2546	1857	1393	1273	1061	796	716
			FEED	134	139	148	137	153	163	166	175	175
N	21~22	Aluminum-wrought alloy	Vc	145	160	150	150	155	175	185	195	195
			fz	0.025	0.032	0.045	0.057	0.075	0.085	0.1	0.134	0.175
			RPM	15385	12732	9549	7958	6167	5570	4907	3879	3104
			FEED	769	815	859	907	925	947	981	1040	1086
	23~25	Aluminum-cast, alloyed	Vc	145	160	150	150	155	175	185	195	195
			fz	0.025	0.032	0.045	0.057	0.075	0.085	0.1	0.134	0.175
			RPM	15385	12732	9549	7958	6167	5570	4907	3879	3104
			FEED	769	815	859	907	925	947	981	1040	1086

※ The FEED, in long & extra long types, should be reduced by around 50%




## G9400 SERIES

Vc = m/min.  
 fz = mm/tooth  
 RPM = rev./min.  
 FEED = mm/min.

### 2 FLUTE DRILL MILLS - CHAMFERING & SIDE CUTTING

ISO	VDI 3323	Material Description	Parameter	Mill Diameter (Ø)								
				3.0	4.0	5.0	6.0	8.0	10.0	12.0	16.0	20.0
P	1-2	Non-alloy steel	Vc	80	85	85	80	80	90	95	90	95
			fz	0.008	0.01	0.013	0.018	0.025	0.03	0.037	0.054	0.063
			RPM	8488	6764	5411	4244	3183	2865	2520	1790	1512
	3-4		Vc	50	55	55	55	55	55	60	65	60
			fz	0.008	0.01	0.013	0.018	0.024	0.03	0.041	0.05	0.064
			RPM	5305	4377	3501	2918	2188	1751	1592	1293	955
	5		Vc	45	50	50	50	45	55	55	55	55
			fz	0.008	0.009	0.012	0.017	0.025	0.027	0.036	0.046	0.06
			RPM	4775	3979	3183	2653	1790	1751	1459	1094	875
	6		Vc	80	85	85	80	80	90	95	90	95
			fz	0.008	0.01	0.013	0.018	0.025	0.03	0.037	0.054	0.063
			RPM	8488	6764	5411	4244	3183	2865	2520	1790	1512
7	Vc	50	55	55	55	55	55	60	65	60		
	fz	0.008	0.01	0.013	0.018	0.024	0.03	0.041	0.05	0.064		
	RPM	5305	4377	3501	2918	2188	1751	1592	1293	955		
8-9	Vc	45	50	50	50	45	55	55	55	55		
	fz	0.008	0.009	0.012	0.017	0.025	0.027	0.036	0.046	0.06		
	RPM	4775	3979	3183	2653	1790	1751	1459	1094	875		
10	Vc	80	85	85	80	80	90	95	90	95		
	fz	0.008	0.01	0.013	0.018	0.025	0.03	0.037	0.054	0.063		
	RPM	8488	6764	5411	4244	3183	2865	2520	1790	1512		
11.1	Vc	45	50	50	50	45	55	55	55	55		
	fz	0.008	0.009	0.012	0.017	0.025	0.027	0.036	0.046	0.06		
	RPM	4775	3979	3183	2653	1790	1751	1459	1094	875		
M	14.1	Stainless steel	FEED	76	72	76	90	90	95	105	101	105
			Vc	30	35	40	35	40	45	45	45	40
			fz	0.008	0.01	0.013	0.018	0.024	0.027	0.036	0.046	0.069
			RPM	3183	2785	2546	1857	1592	1432	1194	895	637
N	21~22	Aluminum-wrought alloy	FEED	51	56	66	67	76	77	86	82	88
			Vc	185	210	210	205	205	225	230	230	230
			fz	0.008	0.01	0.013	0.019	0.03	0.037	0.045	0.05	0.064
			RPM	19629	16711	13369	10876	8157	7162	6101	4576	3661
N	23~25	Aluminum-cast, alloyed	FEED	314	334	348	413	489	530	549	458	469
			Vc	185	210	210	205	205	225	230	230	230
			fz	0.008	0.01	0.013	0.019	0.03	0.037	0.045	0.05	0.064
			RPM	19629	16711	13369	10876	8157	7162	6101	4576	3661
S	36-37	Titanium Alloys	FEED	314	334	348	413	489	530	549	458	469
			Vc	30	35	40	35	40	45	45	45	40
			fz	0.008	0.01	0.013	0.018	0.024	0.027	0.036	0.046	0.069
			RPM	3183	2785	2546	1857	1592	1432	1194	895	637
S	36-37	Titanium Alloys	FEED	51	56	66	67	76	77	86	82	88

※ The FEED, in long & extra long types, should be reduced by around 50%






## G9400 SERIES

Vc = m/min.  
 fz = mm/tooth  
 RPM = rev./min.  
 FEED = mm/min.

### 2FLUTE DRILL MILLS - V-GROOVING

ISO	VDI 3323	Material Description	Parameter	Mill Diameter (Ø)								
				3.0	4.0	5.0	6.0	8.0	10.0	12.0	16.0	20.0
P	1-2	Non-alloy steel	Vc	80	85	85	80	80	90	95	100	95
			fz	0.005	0.006	0.008	0.01	0.014	0.016	0.018	0.023	0.029
			RPM	8488	6764	5411	4244	3183	2865	2520	1989	1512
	3-4		Vc	55	60	55	55	55	55	55	65	60
			fz	0.004	0.004	0.006	0.007	0.012	0.014	0.02	0.022	0.028
			RPM	5836	4775	3501	2918	2188	1751	1459	1293	955
	5		Vc	45	50	50	50	45	55	55	55	55
			fz	0.004	0.004	0.006	0.008	0.014	0.015	0.018	0.023	0.03
			RPM	4775	3979	3183	2653	1790	1751	1459	1094	875
	6		Vc	80	85	85	80	80	90	95	100	95
			fz	0.005	0.006	0.008	0.01	0.014	0.016	0.018	0.023	0.029
			RPM	8488	6764	5411	4244	3183	2865	2520	1989	1512
7	Vc	55	60	55	55	55	55	55	65	60		
	fz	0.004	0.004	0.006	0.007	0.012	0.014	0.02	0.022	0.028		
	RPM	5836	4775	3501	2918	2188	1751	1459	1293	955		
8-9	Vc	45	50	50	50	45	55	55	55	55		
	fz	0.004	0.004	0.006	0.008	0.014	0.015	0.018	0.023	0.03		
	RPM	4775	3979	3183	2653	1790	1751	1459	1094	875		
10	Vc	80	85	85	80	80	90	95	100	95		
	fz	0.005	0.006	0.008	0.01	0.014	0.016	0.018	0.023	0.029		
	RPM	8488	6764	5411	4244	3183	2865	2520	1989	1512		
11.1	Vc	45	50	50	50	45	55	55	55	55		
	fz	0.004	0.004	0.006	0.008	0.014	0.015	0.018	0.023	0.03		
	RPM	4775	3979	3183	2653	1790	1751	1459	1094	875		
M	14.1	Stainless steel	Vc	30	35	40	35	40	45	45	45	40
			fz	0.004	0.005	0.006	0.008	0.01	0.011	0.013	0.019	0.028
			RPM	3183	2785	2546	1857	1592	1432	1194	895	637
			FEED	25	28	31	30	32	32	31	34	36
N	21~22	Aluminum-wrought alloy	Vc	185	210	210	205	205	220	230	230	230
			fz	0.008	0.01	0.013	0.016	0.022	0.026	0.03	0.041	0.052
			RPM	19629	16711	13369	10876	8157	7003	6101	4576	3661
			FEED	314	334	348	348	359	364	366	375	381
N	23~25	Aluminum-cast, alloyed	Vc	185	210	210	205	205	220	230	230	230
			fz	0.008	0.01	0.013	0.016	0.022	0.026	0.03	0.041	0.052
			RPM	19629	16711	13369	10876	8157	7003	6101	4576	3661
			FEED	314	334	348	348	359	364	366	375	381
S	36-37	Titanium Alloys	Vc	30	35	40	35	40	45	45	45	40
			fz	0.004	0.005	0.006	0.008	0.01	0.011	0.013	0.019	0.028
			RPM	3183	2785	2546	1857	1592	1432	1194	895	637
			FEED	25	28	31	30	32	32	31	34	36

※ The FEED, in long & extra long types, should be reduced by around 50%



※ The FEED, in long & extra long types, should be reduced by around 50%

MEMO



A large grid of small squares, typical of graph paper, covering the majority of the page. The grid is composed of light gray lines forming a uniform pattern of squares.

# HIGH QUALITY PRODUCTS and ON TIME DELIVERY for WORLD-WIDE CUSTOMERS

Since 1982, YG-1 has been committed to quality, innovation and the unique customer experience. Our performance and experience have granted YG-1 the global impression of one of the leading manufacturers of high quality cutting tool solutions. This global footprint expands over 75 countries, with international logistic centers, pledging to our customers to give the best service available today - and tomorrow.

## EUROPE



## ASIA PACIFIC



## AMERICAS



## AFRICA



 **YG-1 CO., LTD.**

\* For more information on sales network, please contact the head office as below;

### YG-1 HEAD OFFICE

211, Sewolcheon-ro, Bupyeong-gu, Incheon, South Korea  
Phone: +82-32-526-0909  
E-mail: yg1@yg1.kr  
www.yg1.kr

  
 **YG-1 CO., LTD.****HEAD OFFICE**

211, Sewolcheon-ro, Bupyeong-gu, Incheon, South Korea

**Phone: +82-32-526-0909**

**Http://www.yg1.kr**

**E-mail: yg1@yg1.kr**

**Note** The information is provided for reference only. Tool specifications are subject to change without prior notice.  
Although we endeavor to supply accurate and timely information, there can be no guarantee to cover every particular application.  
YG-1 or publishers are not liable for any damage for use of the information.



Search 'YG-1' on social media outlets

YG1YEK2200107006