



Leading Through Innovation



HSS

MILLING CUTTERS

HSS Fräser

- General Works. Available Dovetail, Woodruff Keyseat, T-slot, Side Milling Cutters and HSS (8% cobalt) Corner Rounding, Shell End Mills
- Allgemeine Arbeiten. Verfügbare Schwalbenschwanz, Passfedernut, T-Nut, Scheibenfräser, Scheibenfräser und HSS (8% Kobalt) Eckenverrundung, Walzenstirnfräser

SELECTION GUIDE



MILLING TOOLS

HSS

CBN
END MILLS

i-Xmill
END MILLS

i-SMART
MODULAR
END MILLS

X5070
END MILLS

4G MILL
END MILLS

X-POWER
PRO
END MILLS

TitaNox-
POWER
END MILLS

JET-POWER
END MILLS

V7 PLUS
END MILLS

ALU-POWER
HPC
END MILLS

ALU-
POWER
END MILLS

D-POWER
GRAPHITE
END MILLS

D-POWER
CFRP
END MILLS

ROUTERS

CRX S
END MILLS

K-2
END MILLS

ONLY ONE
COATED PM60
END MILLS

TANK-
POWER
END MILLS

GENERAL
HSS
END MILLS

**MILLING
CUTTERS**

TECHNICAL
DATA

SERIES	ML012, ML022 ML112, ML122 ML212, ML222	ML032, ML042 ML132, ML142 ML232, ML242	ML062 ML162 ML262
	DOVETAIL CUTTERS	DOVETAIL CUTTERS	WOODRUFF KEYSEAT CUTTERS
FLUTE	-	-	-
HELIX ANGLE	0°	0°	10°-20°
SIZE MIN	D16.0	D16.0	D10.5
SIZE MAX	D50.0	D38.0	D45.5
PAGE	792	793	794

**HSS
MILLING
CUTTERS**

General Works. Available Dovetail, Woodruff Keyseat, T-slot, Side Milling Cutters and HSS (8% cobalt) Corner Rounding, Shell End Mills



Please visit globalyg1.com/mat for material search

◎ : Excellent ○ : Good

Recommended cutting conditions : P 811



ISO	VDI 3323	Material Description	Composition / Structure / Heat Treatment	HB	HRc	ML012, ML022, ML112, ML122, ML212, ML222	ML032, ML042, ML132, ML142, ML232, ML242	ML062, ML162, ML262
P	1	Non-alloy steel	About 0.15% C Annealed	125		◎	◎	◎
	2		About 0.45% C Annealed	190	13	◎	◎	◎
	3		About 0.45% C Quenched & Tempered	250	25	◎	◎	◎
	4		About 0.75% C Annealed	270	28	◎	◎	◎
	5		About 0.75% C Quenched & Tempered	300	32	◎	◎	◎
	6	Low alloy steel	Annealed	180	10	◎	◎	◎
	7		Quenched & Tempered	275	29	◎	◎	◎
	8		Quenched & Tempered	300	32	◎	◎	◎
	9		Quenched & Tempered	350	38	○	○	○
	10		High alloyed steel, and tool steel	Annealed	200	15	◎	◎
	11	Quenched & Tempered		325	35	○	○	○
M	12	Stainless steel	Ferritic / Martensitic Annealed	200	15			
	13		Martensitic Quenched & Tempered	240	23			
	14		Austenitic	180	10			
K	15	Grey cast iron	Pearlitic / ferritic	180	10			
	16		Pearlitic (Martensitic)	260	26			
	17	Nodular cast iron	Ferritic	160	3			
	18		Pearlitic	250	25			
	19		Ferritic	130				
20	Malleable cast iron	Pearlitic	230	21				
N	21	Aluminum-wrought alloy	Not Curable	60		○	○	○
	22		Curable Hardened	100		○	○	○
	23	Aluminum-cast, alloyed	≤ 12% Si, Not Curable	75		○	○	○
	24		≤ 12% Si, Curable Hardened	90		○	○	○
	25		> 12% Si, Not Curable	130		○	○	○
	26		Copper and Copper Alloys	Cutting Alloys, PB>1%	110			
	27	(Bronze / Brass)	CuZn, CuSnZn (Brass)	90				
	28		CuSn, lead-free copper and electrolytic copper	100				
	29		Non Metallic Materials	Duroplastic, Fiber Reinforced Plastic				
	30		Rubber, Wood, etc.					
S	31	Heat Resistant Super Alloys	Fe Based Annealed	200	15			
	32		Cured	280	30			
	33		Annealed	250	25			
	34		Cured	350	38			
	35	Cast	320	34				
	36	Titanium Alloys	Pure Titanium	400 Rm				
	37		Alpha + Beta Alloys Hardened	1050 Rm				
H	38	Hardened steel	Hardened	550	55			
	39		Hardened	630	60			
	40	Chilled Cast Iron	Cast	400	42			
	41	Hardened Cast Iron	Hardened	550	55			

ML072 ML172 ML272	ML092	ML102	E2675	E2676	E2677	E2678	E2679	E2498
T-SLOT CUTTERS	SIDE AND FACE MILLING CUTTERS	SIDE AND FACE MILLING CUTTERS	SHELL END MILL	SHELL END MILL	ROUGHING SHELL END MILL	ROUGHING SHELL END MILL	ROUGHING & FINISHING SHELL END MILL	CORNER ROUNDING CUTTERS
-	-	-	Multi Flute	Multi Flute	Multi Flute	Multi Flute	Multi Flute	4
10°-20°	10°	-	30°	42°	30°	30°	30°	0°
D12.5	D50.0	D50.0	D30.0	D30.0	D40.0	D40.0	D40.0	D8.0
D40.0	D125.0	D200.0	D160.0	D100.0	D160.0	D160.0	D160.0	D56.0
796	797	799	805	806	807	808	809	810
Type AA, AB, AD	with STRAIGHT TEETH	with STAGGERED TEETH	-	for ALUMINUM	-	-	-	-
Uncoated	Uncoated	Uncoated	Uncoated	Uncoated	Uncoated	Uncoated	Uncoated	Uncoated
HSS-E	HSS-E	HSS-E	HSS Co8	HSS Co8	HSS Co8	HSS Co8	HSS Co8	HSS Co8

								
---	---	---	---	---	---	--	---	---

⊙	⊙	⊙	⊙	○	⊙	⊙	⊙	⊙	1
⊙	⊙	⊙	⊙	○	⊙	⊙	⊙	⊙	2
⊙	⊙	⊙	⊙	○	⊙	⊙	⊙	⊙	3
⊙	⊙	⊙	⊙	○	⊙	⊙	⊙	⊙	4
⊙	⊙	⊙	⊙	○	○	○	○	○	5
⊙	⊙	⊙	⊙	○	⊙	⊙	⊙	⊙	6 P
⊙	⊙	⊙	⊙	○	○	○	○	○	7
⊙	○	○	○	○	○	○	○	○	8
⊙	○	○	⊙	○	⊙	⊙	⊙	⊙	10
	○	○	○	○	○	○	○	○	11
									12
									13 M
									14
									15
									16
									17 K
									18
									19
									20
○	○	○		⊙	○	○	○	○	21
○	○	○		⊙	○	○	○	○	22
○	○	○		⊙	○	○	○	○	23
○	○	○		⊙	○	○	○	○	24
○	○	○		⊙	○	○	○	○	25
									26 N
									27
									28
									29
									30
									31
									32
									33
									34 S
									35
									36
									37
									38
									39 H
									40
									41

CBN END MILLS
i-Xmill END MILLS
i-SMART MODULAR END MILLS
X5070 END MILLS
4G MILL END MILLS
X-POWER PRO END MILLS
TitaNox-POWER END MILLS
JET-POWER END MILLS
V7 PLUS END MILLS
ALU-POWER HPC END MILLS
ALU-POWER END MILLS
D-POWER GRAPHITE END MILLS
D-POWER CFRP END MILLS
ROUTERS
CRX S END MILLS
K-2 END MILLS
ONLY ONE COATED PM60 END MILLS
TANK-POWER END MILLS
GENERAL HSS END MILLS
MILLING CUTTERS
TECHNICAL DATA





PLAIN SHANK **ML012, ML022** SERIES
 FLAT SHANK **ML112, ML122** SERIES
 THREAD SHANK **ML212, ML222** SERIES

HSS-E, DOVETAIL CUTTERS TYPE "A", "C", "E"

- HSS-E, WINKELFRÄSER FORM "A", "C", "E"
- Fraise HSS-E pour queue d'aronde Type "A", "C", "E"
- FRESE AD ANGOLO DIVERGENTE TIPO "A", "C", "E"

▶ Recommended for use in place of arbor and threaded hole type cutters to reduce set time and facilitate handling.

▶ Empfohlen zur Nutzung anstelle von Arbor und threaded hole type Cutters um Montierzeit zu verkürzen und Handhabung zu erleichtern.

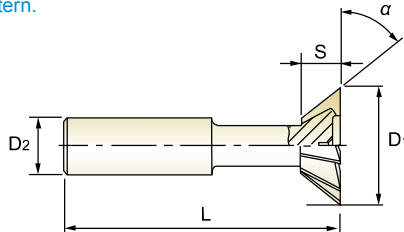

HSS-E
DIN 1833
N
0°
DIN 1835A
DIN 1835B
DIN 1835D
P.812


EDP No.			Cutter Diameter	Width of Face	Divergent Taper Angle	Shank Diameter	Overall Length	No. of Teeth
PLAIN	FLAT	THREAD	D1(js16)	S(js14)	α(± 15°)	D2(h6)	L(js18)	Z
ML01201601	ML11201601	-	16.0	4	45°	12	60	6
ML01202001	ML11202001	▲ ML21202001	20.0	5	45°	12	63	6
ML01202201	ML11202201	-	22.0	6	45°	12	67	6
ML01202501	ML11202501	▲ ML21202501	25.0	6.3	45°	16	67	8
ML01202801	ML11202801	-	28.0	7.5	45°	16	67	8
ML01203201	ML11203201	-	32.0	8	45°	16	71	10
ML01203801	ML11203801	-	38.0	10	45°	16	80	12
ML02201601	ML12201601	▲ ML22201601	16.0	6.3	60°	12	60	6
ML02202001	ML12202001	-	20.0	8	60°	12	63	6
ML02202201	ML12202201	-	22.0	9	60°	12	67	6
ML02202501	ML12202501	-	25.0	10	60°	16	67	8
ML02202801	ML12202801	-	28.0	11	60°	16	67	8
ML02203201	ML12203201	-	32.0	12.5	60°	16	71	10
ML02203801	ML12203801	-	38.0	16	60°	16	80	12
ML02204001	ML12204001	▲ ML22204001	40.0	13	60°	25	85	12
ML02205001	ML12205001	-	50.0	16	60°	25	100	16

Unit : mm

▲ : Only available till stock runs out

Tolerances according to DIN 7160 & 7161

	Nominal-Diameter in mm						
	over3to6	over6to10	over10to18	over18to30	over30to50	over50to80	over80to120
Tolerance range in mm							
js16	± 0.375	± 0.45	± 0.55	± 0.65	± 0.80	± 0.95	± 1.10
js14	± 0.15	± 0.18	± 0.215	± 0.26	± 0.31	± 0.37	± 0.435
js18	± 0.90	± 1.10	± 1.35	± 1.65	± 1.95	± 2.30	± 2.70
Tolerance range in μm							
h6	-0 -8	-0 -9	-0 -11	-0 -13	-0 -16	-0 -19	-0 -22




◎ : Excellent ○ : Good

ISO Material Description	P										M			K							
	Non-alloy steel					Low alloy steel					High alloyed steel, and tool steel			Stainless steel			Grey cast iron		Nodular cast iron		Malleable cast iron
VDI 3323	1	2	3	4	5	6	7	8	9	10	11	12	13	14	15	16	17	18	19	20	
HRc		13	25	28	32	10	29	32	38	15	35	15	23	10	10	26	3	25		21	
HB	125	190	250	270	300	180	275	300	350	200	325	200	240	180	180	260	160	250	130	230	
Recommended	◎	◎	◎	◎	◎	◎	◎	◎	◎	◎	◎	◎	◎	◎	◎	◎	◎	◎	◎	◎	

ISO Material Description	N										S						H				
	Aluminum-wrought alloy		Aluminum-cast, alloyed			Copper and Copper Alloys (Bronze / Brass)			Non Metallic Materials		Heat Resistant Super Alloys			Titanium Alloys			Hardened steel		Chilled Cast Iron	Hardened Cast Iron	
VDI 3323	21	22	23	24	25	26	27	28	29	30	31	32	33	34	35	36	37	38	39	40	41
HRc											15	30	25	38	34			55	60	42	55
HB	60	100	75	90	130	110	90	100			200	280	250	350	320	400 Rm	1050 Rm	550	630	400	550
Recommended	○	○	○	○	○																

HSS-E, DOVETAIL CUTTERS TYPE "B", "D", "F"

- HSS-E, WINKELFRÄSER FORM "B", "D", "F"
- Fraise HSS-E pour queue d'arronde Type "B", "D", "F"
- FRESE AD ANGOLO CONVERGENTE TIPO "B", "D", "F"

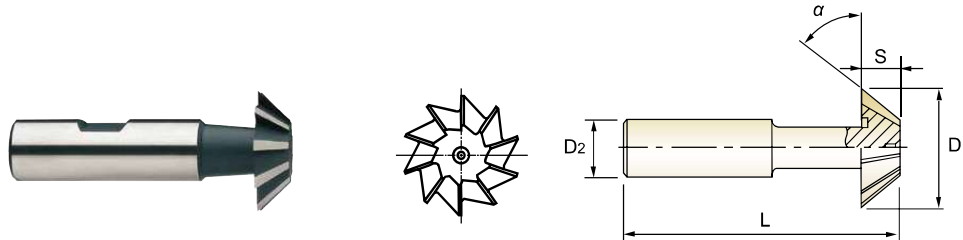


EDP No.			Cutter Diameter	Width of Face	Divergent Taper Angle	Shank Diameter	Overall Length	No. of Teeth
PLAIN	FLAT	THREAD	D1(js16)	S(js14)	$\alpha (\pm 15^\circ)$	D2(h6)	L(js18)	Z
ML03201601	ML13201601	-	16.0	4	45°	12	60	6
ML03202001	ML13202001	-	20.0	5	45°	12	63	6
ML03202201	ML13202201	-	22.0	6	45°	12	67	6
ML03202501	ML13202501	▲ ML23202501	25.0	6.3	45°	16	67	8
ML03202801	ML13202801	-	28.0	7.5	45°	16	67	8
ML03203201	ML13203201	-	32.0	8	45°	16	71	10
ML03203801	ML13203801	-	38.0	10	45°	16	80	12
ML04201601	ML14201601	-	16.0	6.3	60°	12	60	6
ML04202001	ML14202001	▲ ML24202001	20.0	8	60°	12	63	6
ML04202201	ML14202201	-	22.0	9	60°	12	67	6
ML04202501	ML14202501	-	25.0	10	60°	16	67	8
ML04202801	ML14202801	-	28.0	11	60°	16	67	8
ML04203201	ML14203201	-	32.0	12.5	60°	16	71	10
ML04203801	ML14203801	-	38.0	16	60°	16	80	12

▲ : Only available till stock runs out

Tolerances according to DIN 7160 & 7161

	Nominal-Diameter in mm						
	over3to6	over6to10	over10to18	over18to30	over30to50	over50to80	over80to120
	Tolerance range in mm						
js16	± 0.375	± 0.45	± 0.55	± 0.65	± 0.80	± 0.95	± 1.10
js14	± 0.15	± 0.18	± 0.215	± 0.26	± 0.31	± 0.37	± 0.435
js18	± 0.90	± 1.10	± 1.35	± 1.65	± 1.95	± 2.30	± 2.70
	Tolerance range in μm						
h6	0 - 8	0 - 9	0 - 11	0 - 13	0 - 16	0 - 19	0 - 22



ISO	P										M			K						
	Non-alloy steel					Low alloy steel					High alloyed steel, and tool steel			Stainless steel			Grey cast iron		Nodular cast iron	
Material Description	1	2	3	4	5	6	7	8	9	10	11	12	13	14	15	16	17	18	19	20
VDI 3323	1	2	3	4	5	6	7	8	9	10	11	12	13	14	15	16	17	18	19	20
HRc	13	25	28	32	30	29	32	38	35	35	35	23	23	10	10	26	3	25	42	21
HB	125	190	250	270	300	180	275	300	350	200	325	200	240	180	180	260	160	250	130	230
Recommended	○	○	○	○	○	○	○	○	○	○	○	○	○	○	○	○	○	○	○	○

ISO	N					S					H										
	Aluminum-wrought alloy		Aluminum-cast, alloyed			Copper and Copper Alloys (Bronze / Brass)			Non Metallic Materials		Heat Resistant Super Alloys					Titanium Alloys		Hardened steel	Chilled Cast Iron	Hardened Cast Iron	
Material Description	21	22	23	24	25	26	27	28	29	30	31	32	33	34	35	36	37	38	39	40	41
VDI 3323	21	22	23	24	25	26	27	28	29	30	31	32	33	34	35	36	37	38	39	40	41
HRc	60	100	75	90	130	110	90	100			15	30	25	38	34	55	60	55	60	42	55
HB	60	100	75	90	130	110	90	100			200	280	250	350	320	400 Rm	1050 Rm	550	630	400	550
Recommended	○	○	○	○	○	○	○	○	○	○	○	○	○	○	○	○	○	○	○	○	○


◎ : Excellent ○ : Good



PLAIN SHANK	ML062 SERIES
FLAT SHANK	ML162 SERIES
THREAD SHANK	ML262 SERIES

HSS-E, WOODRUFF KEYSEAT CUTTERS TYPE "B", "D", "F"

- HSS-E, SCHLITZFRÄSER FORM "B", "D", "F"
- Fraise HSS-E WOODRUFF Type "B", "D", "F"
- FRESE PER CHIAVETTE WOODRUFF TIPO "B", "D", "F"

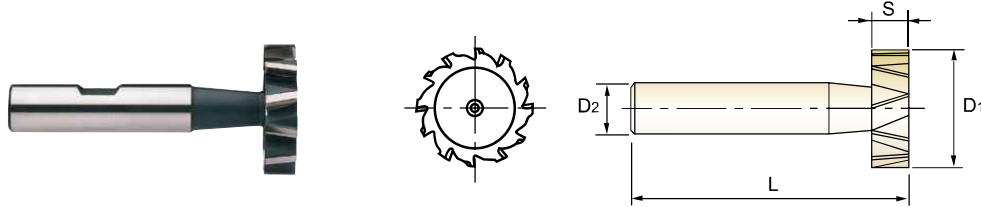

HSS-E
DIN 850
N
10~12°
DIN 1835A
DIN 1835B
DIN 1835D
P.814

Unit : mm


EDP No.	Cutter Diameter			Width of Face	Shank Diameter	Overall Length	No. of Teeth
	PLAIN	FLAT	THREAD				
ML06210E01	ML16210E01	-	10.5	2	6	50	8
ML06210E02	ML16210E02	-	10.5	2.5	6	50	8
ML06210E03	ML16210E03	-	10.5	3	6	50	8
ML06213E01	ML16213E01	-	13.5	2	10	56	8
ML06213E02	ML16213E02	-	13.5	2.5	10	56	8
ML06213E03	ML16213E03	-	13.5	3	10	56	8
ML06213E04	ML16213E04	-	13.5	4	10	56	8
ML06216E01	ML16216E01	-	16.5	2.5	10	56	8
ML06216E02	ML16216E02	-	16.5	3	10	56	8
ML06216E03	ML16216E03	-	16.5	4	10	56	8
ML06216E04	ML16216E04	-	16.5	5	10	56	8
ML06219E01	ML16219E01	-	19.5	3	10	56	8
ML06219E02	ML16219E02	-	19.5	4	10	63	8
ML06219E03	ML16219E03	-	19.5	5	10	63	8
ML06219E04	ML16219E04	-	19.5	6	10	63	8
ML06222E01	ML16222E01	-	22.5	4	10	63	10
ML06222E02	ML16222E02	▲ ML26222E02	22.5	5	10	63	10
ML06222E03	ML16222E03	-	22.5	6	10	63	10
ML06222E04	ML16222E04	-	22.5	8	10	63	10
ML06225E01	ML16225E01	-	25.5	5	10	63	10

Tolerances according to DIN 7160 & 7161

▲ : Only available till stock runs out

▶ NEXT PAGE

Nominal-Diameter in mm							
	from 1 to 3	over 3 to 6	over 6 to 10	over 10 to 18	over 18 to 30	over 30 to 50	over 50 to 80
Tolerance range in mm							
js18	± 0.90	± 1.10	± 1.35	± 1.65	± 1.95	± 2.30	± 2.70
Tolerance range in μm							
h11	0 -60	0 -75	0 -90	0 -110	0 -130	0 -160	0 -190
e8	-14 -28	-20 -38	-25 -47	-32 -59	-40 -73	-50 -89	-60 -106
h6	0 -6	0 -8	0 -9	0 -11	0 -13	0 -16	0 -19




◎ : Excellent ○ : Good

ISO	P											M			K					
	Non-alloy steel					Low alloy steel				High alloyed steel, and tool steel		Stainless steel			Grey cast iron		Nodular cast iron		Malleable cast iron	
Material Description	1	2	3	4	5	6	7	8	9	10	11	12	13	14	15	16	17	18	19	20
VDI 3323																				
HRc																				
HB	125	190	250	270	300	180	275	300	350	200	325	200	240	180	180	260	160	250	130	230
Recommended	◎	◎	◎	◎	◎	◎	◎	◎	◎	◎	◎	◎	◎	◎	◎	◎	◎	◎	◎	◎

ISO	N					S				H											
	Aluminum-wrought alloy		Aluminum-cast, alloyed		Copper and Copper Alloys (Bronze / Brass)		Non Metallic Materials		Heat Resistant Super Alloys			Titanium Alloys		Hardened steel	Chilled Cast Iron	Hardened Cast Iron					
Material Description	21	22	23	24	25	26	27	28	29	30	31	32	33	34	35	36	37	38	39	40	41
VDI 3323																					
HRc																					
HB	60	100	75	90	130	110	90	100			200	280	250	350	320	400 Rm	1050 Rm	550	630	400	550
Recommended	◎	◎	◎	◎	◎	◎	◎	◎	◎	◎	◎	◎	◎	◎	◎	◎	◎	◎	◎	◎	◎

HSS-E, WOODRUFF KEYSEAT CUTTERS TYPE "B", "D", "F"

- HSS-E, SCHLITZFRÄSER FORM "B", "D", "F"
- Fraise HSS-E WOODRUFF Type "B", "D", "F"
- FRESE PER CHIAVETTE WOODRUFF TIPO "B", "D", "F"

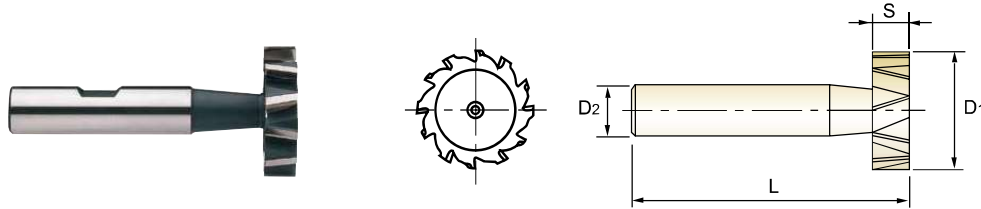


EDP No.			Cutter Diameter	Width of Face	Shank Diameter	Overall Length	No. of Teeth
PLAIN	FLAT	THREAD	D1(h11)	S(e8)	D2(h6)	L(js18)	Z
ML06225E02	ML16225E02	-	25.5	6	10	63	10
ML06225E03	ML16225E03	-	25.5	7	10	63	10
ML06225E04	ML16225E04	-	25.5	8	10	63	10
ML06228E01	ML16228E01	▲ ML26228E01	28.5	5	10	63	10
ML06228E02	ML16228E02	-	28.5	6	10	63	10
ML06228E03	ML16228E03	-	28.5	7	10	63	10
ML06228E04	ML16228E04	-	28.5	8	10	63	10
ML06228E05	ML16228E05	▲ ML26228E05	28.5	10	12	71	10
ML06232E01	ML16232E01	-	32.5	5	12	71	12
ML06232E02	ML16232E02	-	32.5	6	12	71	12
ML06232E03	ML16232E03	▲ ML26232E03	32.5	7	12	71	12
ML06232E04	ML16232E04	-	32.5	8	12	71	12
ML06232E05	ML16232E05	▲ ML26232E05	32.5	10	12	71	12
ML06238E01	ML16238E01	-	38.5	7	12	71	12
ML06238E02	ML16238E02	-	38.5	8	12	71	12
ML06238E03	ML16238E03	-	38.5	9	12	71	12
ML06238E04	ML16238E04	-	38.5	10	12	71	12
ML06245E01	ML16245E01	-	45.5	10	12	71	14

▲ : Only available till stock runs out

Tolerances according to DIN 7160 & 7161

	Nominal-Diameter in mm						
	from 1 to 3	over 3 to 6	over 6 to 10	over 10 to 18	over 18 to 30	over 30 to 50	over 50 to 80
Tolerance range in mm							
js18	± 0.90	± 1.10	± 1.35	± 1.65	± 1.95	± 2.30	± 2.70
Tolerance range in μm							
h11	0 -60	0 -75	0 -90	0 -110	0 -130	0 -160	0 -190
e8	-14 -28	-20 -38	-25 -47	-32 -59	-40 -73	-50 -89	-60 -106
h6	0 -6	0 -8	0 -9	0 -11	0 -13	0 -16	0 -19



◎ : Excellent ○ : Good

ISO Material Description	P										M			K						
	Non-alloy steel					Low alloy steel					High alloyed steel, and tool steel			Stainless steel			Grey cast iron	Nodular cast iron		Malleable cast iron
VDI 3323	1	2	3	4	5	6	7	8	9	10	11	12	13	14	15	16	17	18	19	20
HRc																				
HB	125	190	250	270	300	180	275	300	350	200	325	200	240	180	180	260	160	250	130	230
Recommended	◎	◎	◎	◎	◎	◎	◎	◎	◎	◎	◎	◎	◎	◎	◎	◎	◎	◎	◎	◎


ISO Material Description	N					S					H										
	Aluminum-wrought alloy		Aluminum-cast, alloyed			Copper and Copper Alloys (Bronze / Brass)			Non Metallic Materials		Heat Resistant Super Alloys			Titanium Alloys		Hardened steel	Chilled Cast Iron	Hardened Cast Iron			
VDI 3323	21	22	23	24	25	26	27	28	29	30	31	32	33	34	35	36	37	38	39	40	41
HRc																					
HB	60	100	75	90	130	110	90	100			15	30	25	38	34	400 Rm	1050 Rm	550	630	400	550
Recommended	◎	◎	◎	◎	◎	◎	◎	◎	◎	◎	◎	◎	◎	◎	◎	◎	◎	◎	◎	◎	◎



PLAIN SHANK	ML072 SERIES
FLAT SHANK	ML172 SERIES
THREAD SHANK	ML272 SERIES

HSS-E, T-SLOT CUTTERS TYPE "AA", "AB", "AD"

- HSS-E, SCHAFTERFRÄSER FÜR T-NUTEN FORM "AA", "AB", "AD"
- Fraise HSS-E pour rainure en "T" Type "AA", "AB", "AD"
- FRESE PER SCANALATURE A T - DENTI ALTERNATI

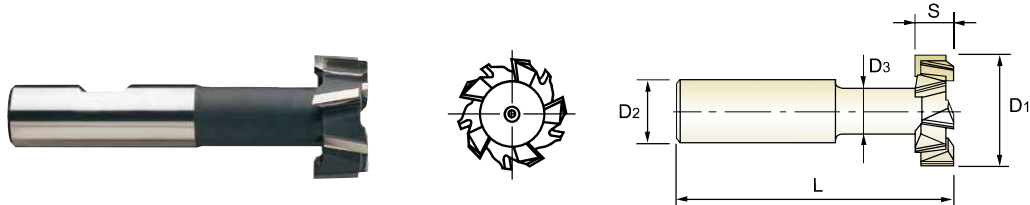


Unit : mm

EDP No.	Cutter Diameter			Width of Face	Shank Diameter	Neck Diameter	Overall Length	No. of Teeth
	PLAIN	FLAT	THREAD					
ML07212E01	ML17212E01	-	12.5	6	10	5	57	6
ML07201601	ML17201601	-	16.0	8	10	6.5	62	6
ML07201801	ML17201801	-	18.0	8	12	8	70	6
ML07201901	ML17201901	-	19.0	9	12	8	71	6
ML07202101	ML17202101	-	21.0	9	12	10	74	6
ML07202201	ML17202201	-	22.0	10	12	10	75	6
ML07202501	ML17202501	-	25.0	11	16	12	82	6
ML07202801	ML17202801	▲ ML27202801	28.0	12	16	13	83	6
ML07203201	ML17203201	-	32.0	14	16	15	90	8
ML07203601	ML17203601	▲ ML27203601	36.0	16	25	17	103	8
ML07204001	ML17204001	▲ ML27204001	40.0	18	25	19	108	8

▲ : Only available till stock runs out

Tolerances according to DIN 7160 & 7161

	Nominal-Diameter in mm						
	over3to6	over6to10	over10to18	over18to30	over30to50	over50to80	over80to120
Tolerance range in mm							
h12	0	0	0	0	0	0	0
js18	-0.12	-0.15	-0.18	-0.21	-0.25	-0.30	-0.35
Tolerance range in μm							
d11	-30	-40	-50	-65	-80	-100	-120
h6	0	0	0	0	0	0	0
	-105	-130	-160	-195	-240	-290	-340
	-8	-9	-11	-13	-16	-19	-22



◎ : Excellent ○ : Good

ISO	P										M			K						
	Non-alloy steel					Low alloy steel					High alloyed steel, and tool steel			Stainless steel			Grey cast iron		Nodular cast iron	
Material Description	1	2	3	4	5	6	7	8	9	10	11	12	13	14	15	16	17	18	19	20
VDI 3323	1	2	3	4	5	6	7	8	9	10	11	12	13	14	15	16	17	18	19	20
HRc	13	25	28	32	10	29	32	38	15	35	15	23	10	10	26	3	25	21	21	
HB	125	190	250	270	300	180	275	300	350	200	325	200	240	180	180	260	160	250	130	230
Recommended	◎	◎	◎	◎	◎	◎	◎	◎	◎	◎	◎	◎	◎	◎	◎	◎	◎	◎	◎	◎

ISO	N										S							H			
	Aluminum-wrought alloy		Aluminum-cast, alloyed			Copper and Copper Alloys (Bronze / Brass)			Non Metallic Materials		Heat Resistant Super Alloys					Titanium Alloys		Hardened steel	Chilled Cast Iron	Hardened Cast Iron	
Material Description	21	22	23	24	25	26	27	28	29	30	31	32	33	34	35	36	37	38	39	40	41
VDI 3323	21	22	23	24	25	26	27	28	29	30	31	32	33	34	35	36	37	38	39	40	41
HRc	60	100	75	90	130	110	90	100			15	30	25	38	34			55	60	42	55
HB	60	100	75	90	130	110	90	100			200	280	250	350	320	400 Rm	1050 Rm	550	630	400	550
Recommended	○	○	○	○	○	○	○	○			○	○	○	○	○	○	○	○	○	○	○

HSS-E, SIDE AND FACE MILLING CUTTERS with STRAIGHT TEETH



● HSS-E, SCHEIBENFRÄSER mit GERADEVERZAHNT

○ Fraise HSS-E 3 Tailles, denture droite

○ FRESE A DISCO A TRE TAGLI - DENTI DRITTI

▶ The tools are used for general purpose side and straddle milling where deep cut is not required.

▶ Diese Werkzeuge werden bei allgemeinen Seiten- und Breitfräsen eingesetzt, wo Tiefschnitte nicht vorkommen.




Unit : mm

EDP No.	Cutter Diameter	Width of Face	Internal Diameter	No. of Teeth
	D ₁ (js14)	S(k11)	d(H7)	Z
ML09205001	50.0	4	16	18
ML09205002	50.0	5	16	18
ML09205003	50.0	6	16	18
ML09205004	50.0	8	16	16
ML09205005	50.0	10	16	16
ML09206301	63.0	5	22	22
ML09206302	63.0	6	22	22
ML09206303	63.0	8	22	20
ML09206304	63.0	10	22	20
ML09206305	63.0	12	22	20
ML09208001	80.0	6	22	24
ML09208002	80.0	8	22	24
ML09208003	80.0	10	22	24
ML09208004	80.0	12	22	20
ML09208005	80.0	6	27	24
ML09208006	80.0	8	27	24
ML09208007	80.0	10	27	24
ML09208008	80.0	12	27	20
ML09210001	100.0	6	27	26
ML09210002	100.0	8	27	26

Tolerances according to DIN 7160 & 7161

Nominal-Diameter in mm								
	over 3 to 6	over 6 to 10	over 10 to 18	over 18 to 30	over 30 to 50	over 50 to 80	over 80 to 120	over 120 to 180
Tolerance range in mm								
js14	± 0.15	± 0.18	± 0.215	± 0.26	± 0.31	± 0.37	± 0.435	± 0.50
Tolerance range in μm								
k11	+75 0	+90 0	+110 0	+130 0	+160 0	+190 0	+220 0	+250 0
H7	+12 0	+15 0	+18 0	+21 0	+25 0	+30 0	+35 0	+40 0

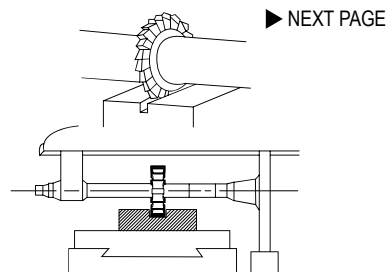

◎ : Excellent ○ : Good

ISO	P										M			K							
	Non-alloy steel					Low alloy steel					High alloyed steel, and tool steel			Stainless steel			Grey cast iron		Nodular cast iron		Malleable cast iron
Material Description	1	2	3	4	5	6	7	8	9	10	11	12	13	14	15	16	17	18	19	20	
VDI 3323	1	2	3	4	5	6	7	8	9	10	11	12	13	14	15	16	17	18	19	20	
HRC	125	130	135	140	145	150	155	160	165	170	175	180	185	190	200	210	220	230	240	250	
HB	125	130	135	140	145	150	155	160	165	170	175	180	185	190	200	210	220	230	240	250	
Recommended	◎	◎	◎	◎	◎	◎	◎	◎	◎	◎	◎	◎	◎	◎	◎	◎	◎	◎	◎	◎	

ISO	N					S										H					
	Aluminum-wrought alloy		Aluminum-cast, alloyed			Copper and Copper Alloys (Bronze / Brass)			Non Metallic Materials		Heat Resistant Super Alloys					Titanium Alloys		Hardened steel	Chilled Cast Iron	Hardened Cast Iron	
Material Description	21	22	23	24	25	26	27	28	29	30	31	32	33	34	35	36	37	38	39	40	41
VDI 3323	21	22	23	24	25	26	27	28	29	30	31	32	33	34	35	36	37	38	39	40	41
HRC	60	100	75	90	130	110	90	100			15	30	25	38	34	55	60	55	60	42	55
HB	60	100	75	90	130	110	90	100			200	280	250	350	320	400 Rm	1050 Rm	550	630	400	550
Recommended	◎	◎	◎	◎	◎	◎	◎	◎	◎	◎	◎	◎	◎	◎	◎	◎	◎	◎	◎	◎	◎

HSS-E, SIDE AND FACE MILLING CUTTERS with STRAIGHT TEETH



● HSS-E, SCHEIBENFRÄSER mit GERADEVERZAHNT

● Fraise HSS-E 3 Tailles, denture droite

● FRESE A DISCO A TRE TAGLI - DENTI DRITTI

▶ The tools are used for general purpose side and straddle milling where deep cut is not required.

▶ Diese Werkzeuge werden bei allgemeinen Seiten- und Breitfräsen eingesetzt, wo Tiefschnitte nicht vorkommen.




Unit : mm

EDP No.	Cutter Diameter	Width of Face	Internal Diameter	No. of Teeth
	D1(js14)	S(k11)	d(H7)	Z
ML09210003	100.0	10	27	22
ML09210004	100.0	6	32	26
ML09210005	100.0	8	32	26
ML09210006	100.0	10	32	22
ML09210007	100.0	12	32	22
ML09212501	125.0	8	32	30
ML09212502	125.0	10	32	30
ML09212503	125.0	12	32	24

Tolerances according to DIN 7160 & 7161

Nominal-Diameter in mm								
	over3to6	over6to10	over10to18	over18to30	over30to50	over50to80	over80to120	over120to180
Tolerance range in mm								
js14	± 0.15	± 0.18	± 0.215	± 0.26	± 0.31	± 0.37	± 0.435	± 0.50
Tolerance range in μm								
k11	+75 0	+90 0	+110 0	+130 0	+160 0	+190 0	+220 0	+250 0
H7	+12 0	+15 0	+18 0	+21 0	+25 0	+30 0	+35 0	+40 0



◎ : Excellent ○ : Good



ISO	P											M			K								
	Non-alloy steel					Low alloy steel						High alloyed steel, and tool steel			Stainless steel			Grey cast iron		Nodular cast iron	Malleable cast iron		
VDI 3323	1	2	3	4	5	6	7	8	9	10	11	12	13	14	15	16	17	18	19	20			
HRc	13	25	28	32	10	29	32	38	15	35	15	23	10	10	26	3	25	42	55				
HB	125	190	250	270	300	180	275	300	350	200	325	200	240	180	180	260	160	250	130	230			
Recommended	◎	◎	◎	◎	◎	◎	◎	◎	○	◎	○												
ISO	N										S						H						
	Aluminum-wrought alloy		Aluminum-cast, alloyed			Copper and Copper Alloys (Bronze / Brass)			Non Metallic Materials		Heat Resistant Super Alloys						Titanium Alloys		Hardened steel		Chilled Cast Iron		Hardened Cast Iron
VDI 3323	21	22	23	24	25	26	27	28	29	30	31	32	33	34	35	36	37	38	39	40	41		
HRc	60	100	75	90	130	110	90	100			15	30	25	38	34	400 Rm	1050 Rm	55	60	42	55		
HB	60	100	75	90	130	110	90	100			200	280	250	350	320	400 Rm	1050 Rm	550	630	400	550		
Recommended	○	○	○	○	○																		

HSS-E, SIDE AND FACE MILLING CUTTERS with STAGGERED TEETH

- HSS-E, SCHEIBENFRÄSER mit KREUZVERZAHNT
- Fraise HSS-E 3 Tailles, denture alternée
- FRESE A DISCO A TRE TAGLI - DENTI ALTERNATI

▶ The type of cutter is recommended for slotting operations.
The alternate spiral effectively counteracts all tendency to chatter.

▶ Dieser Typ ist zum Schlitzfräsen geeignet. Das alternierende Spiral wirkt allen Schnatterbewegungen entgegen.




HSS-E
DIN 885-A
H
P.817

Unit : mm

EDP No.	Cutter Diameter	Width of Face	Internal Diameter	No. of Teeth
	D(js14)	S(k11)	d(H7)	Z
ML10205001	50.0	3	16	14
ML10205002	50.0	4	16	14
ML10205003	50.0	5	16	14
ML10205004	50.0	6	16	14
ML10205005	50.0	7	16	14
ML10205006	50.0	8	16	14
ML10205007	50.0	9	16	14
ML10205008	50.0	10	16	14
ML10206301	63.0	3	22	16
ML10206302	63.0	4	22	16
ML10206303	63.0	5	22	16
ML10206304	63.0	6	22	16
ML10206305	63.0	7	22	16
ML10206306	63.0	8	22	16
ML10206307	63.0	9	22	16
ML10206308	63.0	10	22	16
ML10206309	63.0	12	22	16
ML10206310	63.0	14	22	16
ML10206311	63.0	16	22	16
ML10206312	63.0	18	22	16

Tolerances according to DIN 7160 & 7161

	Nominal-Diameter in mm								
	over 3 to 6	over 6 to 10	over 10 to 18	over 18 to 30	over 30 to 50	over 50 to 80	over 80 to 120	over 120 to 180	over 180 to 250
Tolerance range in mm									
js14	± 0.15	± 0.18	± 0.215	± 0.26	± 0.31	± 0.37	± 0.435	± 0.50	± 0.575
Tolerance range in μm									
k11	+75 0	+90 0	+110 0	+130 0	+160 0	+190 0	+220 0	+250 0	+290 0
H7	+12 0	+15 0	+18 0	+21 0	+25 0	+30 0	+35 0	+40 0	+46 0



▶ NEXT PAGE

◎ : Excellent ○ : Good

ISO Material Description	P										M				K						
	Non-alloy steel					Low alloy steel					High alloyed steel, and tool steel				Stainless steel		Grey cast iron		Nodular cast iron		Malleable cast iron
VDI 3323	1	2	3	4	5	6	7	8	9	10	11	12	13	14	15	16	17	18	19	20	
HRC		13	25	28	32	10	29	32	38	15	35	15	23	10	10	26	3	25	42	21	
HB	125	190	250	270	300	180	275	300	350	200	325	200	240	180	180	260	160	250	130	230	
Recommended	◎	◎	◎	◎	◎	◎	◎	◎	◎	◎	◎	◎	◎	◎	◎	◎	◎	◎	◎	◎	



ISO Material Description	N					S					H										
	Aluminum-wrought alloy		Aluminum-cast, alloyed			Copper and Copper Alloys (Bronze / Brass)			Non Metallic Materials		Heat Resistant Super Alloys			Titanium Alloys	Hardened steel	Chilled Cast Iron	Hardened Cast Iron				
VDI 3323	21	22	23	24	25	26	27	28	29	30	31	32	33	34	35	36	37	38	39	40	41
HRC											15	30	25	38	34	55	60	42	55	42	55
HB	60	100	75	90	130	110	90	100			200	280	250	350	320	400 Rm	1050 Rm	550	630	400	550
Recommended	◎	◎	◎	◎	◎						◎	◎	◎	◎	◎	◎	◎	◎	◎	◎	◎

HSS-E, SIDE AND FACE MILLING CUTTERS with STAGGERED TEETH

- HSS-E, SCHEIBENFRÄSER mit KREUZVERZAHNT
- Fraise HSS-E 3 Tailles, denture alternée
- FRESE A DISCO A TRE TAGLI - DENTI ALTERNATI

▶ The type of cutter is recommended for slotting operations.
The alternate spiral effectively counteracts all tendency to chatter.

▶ Dieser Typ ist zum Schlitzfräsen geeignet. Das alternierende Spiral wirkt allen Schnatterbewegungen entgegen.




HSS-E
DIN 885-A
H
P.817

Unit : mm

EDP No.	Cutter Diameter	Width of Face	Internal Diameter	No. of Teeth
	D(js14)	S(k11)	d(H7)	Z
ML10208001	80.0	3	22	18
ML10208002	80.0	4	22	18
ML10208003	80.0	5	22	18
ML10208004	80.0	6	22	18
ML10208005	80.0	7	22	18
ML10208006	80.0	8	22	18
ML10208007	80.0	9	22	18
ML10208008	80.0	10	22	18
ML10208009	80.0	12	22	18
ML10208010	80.0	14	22	18
ML10208011	80.0	16	22	18
ML10208012	80.0	18	22	18
ML10208013	80.0	20	22	18
ML10208014	80.0	4	27	18
ML10208015	80.0	5	27	18
ML10208016	80.0	6	27	18
ML10208017	80.0	7	27	18
ML10208018	80.0	8	27	18
ML10208019	80.0	9	27	18
ML10208020	80.0	10	27	18

Tolerances according to DIN 7160 & 7161

	Nominal-Diameter in mm								
	over3to6	over6to10	over10to18	over18to30	over30to50	over50to80	over80to120	over120to180	over180to250
Tolerance range in mm									
js14	± 0.15	± 0.18	± 0.215	± 0.26	± 0.31	± 0.37	± 0.435	± 0.50	± 0.575
Tolerance range in μm									
k11	+75 0	+90 0	+110 0	+130 0	+160 0	+190 0	+220 0	+250 0	+290 0
H7	+12 0	+15 0	+18 0	+21 0	+25 0	+30 0	+35 0	+40 0	+46 0



▶ NEXT PAGE

◎ : Excellent ○ : Good

ISO Material Description	P										M				K						
	Non-alloy steel					Low alloy steel					High alloyed steel, and tool steel				Stainless steel		Grey cast iron		Nodular cast iron		Malleable cast iron
VDI 3323	1	2	3	4	5	6	7	8	9	10	11	12	13	14	15	16	17	18	19	20	
HRc		13	25	28	32	10	29	32	38	15	35	15	23	10	10	26	3	25		21	
HB	125	190	250	270	300	180	275	300	350	200	325	200	240	180	180	260	160	250	130	230	
Recommended	◎	◎	◎	◎	◎	◎	◎	◎	◎	◎	◎	◎	◎	◎	◎	◎	◎	◎	◎	◎	



ISO Material Description	N										S					H						
	Aluminum-wrought alloy		Aluminum-cast, alloyed			Copper and Copper Alloys (Bronze / Brass)			Non Metallic Materials		Heat Resistant Super Alloys					Titanium Alloys		Hardened steel	Chilled Cast Iron	Hardened Cast Iron		
VDI 3323	21	22	23	24	25	26	27	28	29	30	31	32	33	34	35	36	37	38	39	40	41	
HRc											15	30	25	38	34	34	36	37	55	60	42	55
HB	60	100	75	90	130	110	90	100			200	280	250	350	320	400 Rm	1050 Rm	550	630	400	550	
Recommended	○	○	○	○	○																	

HSS-E, SIDE AND FACE MILLING CUTTERS with STAGGERED TEETH

- HSS-E, SCHEIBENFRÄSER mit KREUZVERZAHNT
- Fraise HSS-E 3 Tailles, denture alternée
- FRESE A DISCO A TRE TAGLI - DENTI ALTERNATI

▶ The type of cutter is recommended for slotting operations.
The alternate spiral effectively counteracts all tendency to chatter.

▶ Dieser Typ ist zum Schlitzfräsen geeignet. Das alternierende Spiral wirkt allen Schnatterbewegungen entgegen.




EDP No.	Cutter Diameter	Width of Face	Internal Diameter	No. of Teeth
	D(js14)	S(k11)	d(H7)	Z
ML10208021	80.0	12	27	18
ML10208022	80.0	14	27	18
ML10208023	80.0	16	27	18
ML10208024	80.0	18	27	18
ML10208025	80.0	20	27	18
ML10210001	100.0	3	27	20
ML10210002	100.0	4	27	20
ML10210003	100.0	5	27	20
ML10210004	100.0	6	27	20
ML10210005	100.0	7	27	20
ML10210006	100.0	8	27	20
ML10210007	100.0	9	27	20
ML10210008	100.0	10	27	20
ML10210009	100.0	12	27	20
ML10210010	100.0	14	27	20
ML10210011	100.0	15	27	20
ML10210012	100.0	16	27	20
ML10210013	100.0	18	27	20
ML10210014	100.0	20	27	20
ML10210015	100.0	4	32	20

Unit : mm

Tolerances according to DIN 7160 & 7161

	Nominal-Diameter in mm								
	over 3to6	over 6to 10	over 10to 18	over 18to 30	over 30to 50	over 50to 80	over 80to 120	over 120to 180	over 180to 250
	Tolerance range in mm								
js14	± 0.15	± 0.18	± 0.215	± 0.26	± 0.31	± 0.37	± 0.435	± 0.50	± 0.575
	Tolerance range in µm								
k11	+75 0	+90 0	+110 0	+130 0	+160 0	+190 0	+220 0	+250 0	+290 0
H7	+12 0	+15 0	+18 0	+21 0	+25 0	+30 0	+35 0	+40 0	+46 0



▶ NEXT PAGE

◎ : Excellent ○ : Good

ISO Material Description	P										M				K							
	Non-alloy steel					Low alloy steel					High alloyed steel, and tool steel				Stainless steel				Grey cast iron	Nodular cast iron		Malleable cast iron
VDI 3323	1	2	3	4	5	6	7	8	9	10	11	12	13	14	15	16	17	18	19	20		
HRC	13	25	28	32	10	29	32	38	15	35	15	23	10	10	26	3	25	42	21			
HB	125	190	250	270	300	180	275	300	350	200	325	200	240	180	180	260	160	250	130	230		
Recommended	◎	◎	◎	◎	◎	◎	◎	◎	○	◎	○	◎	◎	◎	◎	◎	◎	◎	◎	◎		



ISO Material Description	N					S					H										
	Aluminum-wrought alloy		Aluminum-cast, alloyed			Copper and Copper Alloys (Bronze / Brass)		Non Metallic Materials			Heat Resistant Super Alloys			Titanium Alloys	Hardened steel	Chilled Cast Iron	Hardened Cast Iron				
VDI 3323	21	22	23	24	25	26	27	28	29	30	31	32	33	34	35	36	37	38	39	40	41
HRC	60	100	75	90	130	110	90	100	15	30	25	38	34	15	30	55	60	42	55		
HB	60	100	75	90	130	110	90	100	200	280	250	350	320	400 Rm	1050 Rm	550	630	400	550		
Recommended	◎	◎	◎	◎	◎	◎	◎	◎	◎	◎	◎	◎	◎	◎	◎	◎	◎	◎	◎	◎	◎

HSS-E, SIDE AND FACE MILLING CUTTERS with STAGGERED TEETH

- HSS-E, SCHEIBENFRÄSER mit KREUZVERZAHNT
- Fraise HSS-E 3 Tailles, denture alternée
- FRESE A DISCO A TRE TAGLI - DENTI ALTERNATI

▶ The type of cutter is recommended for slotting operations.
The alternate spiral effectively counteracts all tendency to chatter.

▶ Dieser Typ ist zum Schlitzfräsen geeignet. Das alternierende Spiral wirkt allen Schnatterbewegungen entgegen.




Unit : mm

EDP No.	Cutter Diameter	Width of Face	Internal Diameter	No. of Teeth
	D(js14)	S(k11)	d(H7)	Z
ML10210016	100.0	5	32	20
ML10210017	100.0	6	32	20
ML10210018	100.0	7	32	20
ML10210019	100.0	8	32	20
ML10210020	100.0	9	32	20
ML10210021	100.0	10	32	20
ML10210022	100.0	12	32	20
ML10210023	100.0	14	32	20
ML10210024	100.0	15	32	20
ML10210025	100.0	16	32	20
ML10210026	100.0	18	32	20
ML10210027	100.0	20	32	20
ML10212501	125.0	5	32	22
ML10212502	125.0	6	32	22
ML10212503	125.0	8	32	22
ML10212504	125.0	10	32	22
ML10212505	125.0	12	32	22
ML10212506	125.0	14	32	22
ML10212507	125.0	16	32	22
ML10212508	125.0	18	32	22

Tolerances according to DIN 7160 & 7161

	Nominal-Diameter in mm								
	over3 to6	over6 to10	over10 to18	over18 to30	over30 to50	over50 to80	over80 to120	over120 to180	over180 to250
Tolerance range in mm									
js14	± 0.15	± 0.18	± 0.215	± 0.26	± 0.31	± 0.37	± 0.435	± 0.50	± 0.575
Tolerance range in µm									
k11	+75 0	+90 0	+110 0	+130 0	+160 0	+190 0	+220 0	+250 0	+290 0
H7	+12 0	+15 0	+18 0	+21 0	+25 0	+30 0	+35 0	+40 0	+46 0



▶ NEXT PAGE

◎ : Excellent ○ : Good

ISO Material Description	P										M				K					
	Non-alloy steel					Low alloy steel					High alloyed steel, and tool steel				Stainless steel		Grey cast iron		Nodular cast iron	
VDI 3323	1	2	3	4	5	6	7	8	9	10	11	12	13	14	15	16	17	18	19	20
HRc		13	25	28	32	10	29	32	38	15	35	15	23	10	10	26	3	25		21
HB	125	190	250	270	300	180	275	300	350	200	325	200	240	180	180	260	160	250	130	230
Recommended	◎	◎	◎	◎	◎	◎	◎	◎	◎	◎	◎	◎	◎	◎	◎	◎	◎	◎	◎	◎



ISO Material Description	N										S					H					
	Aluminum-wrought alloy		Aluminum-cast, alloyed			Copper and Copper Alloys (Bronze / Brass)			Non Metallic Materials		Heat Resistant Super Alloys					Titanium Alloys		Hardened steel	Chilled Cast Iron	Hardened Cast Iron	
VDI 3323	21	22	23	24	25	26	27	28	29	30	31	32	33	34	35	36	37	38	39	40	41
HRc											15	30	25	38	34	34	34	55	60	42	55
HB	60	100	75	90	130	110	90	100			200	280	250	350	320	400 Rm	1050 Rm	550	630	400	550
Recommended	○	○	○	○	○																

HSS-E, SIDE AND FACE MILLING CUTTERS with STAGGERED TEETH

- HSS-E, SCHEIBENFRÄSER mit KREUZVERZÄHNT
- Fraise HSS-E 3 Tailles, denture alternée
- FRESE A DISCO A TRE TAGLI - DENTI ALTERNATI

▶ The type of cutter is recommended for slotting operations.
The alternate spiral effectively counteracts all tendency to chatter.

▶ Dieser Typ ist zum Schlitzfräsen geeignet. Das alternierende Spiral wirkt allen Schnatterbewegungen entgegen.




EDP No.	Cutter Diameter	Width of Face	Internal Diameter	No. of Teeth
	D(js14)	S(k11)	d(H7)	Z
ML10212509	125.0	20	32	22
ML10216001	160.0	6	32	26
ML10216002	160.0	8	32	26
ML10216003	160.0	10	32	26
ML10216004	160.0	12	32	26
ML10216005	160.0	14	32	26
ML10216006	160.0	16	32	26
ML10216007	160.0	18	32	26
ML10216008	160.0	20	32	26
ML10216009	160.0	6	40	26
ML10216010	160.0	8	40	26
ML10216011	160.0	10	40	26
ML10216012	160.0	12	40	26
ML10216013	160.0	14	40	26
ML10216014	160.0	16	40	26
ML10216015	160.0	18	40	26
ML10216016	160.0	20	40	26
ML10220001	200.0	10	40	30
ML10220002	200.0	12	40	30
ML10220003	200.0	14	40	30

Unit : mm

Tolerances according to DIN 7160 & 7161

	Nominal-Diameter in mm								
	over 3 to 6	over 6 to 10	over 10 to 18	over 18 to 30	over 30 to 50	over 50 to 80	over 80 to 120	over 120 to 180	over 180 to 250
Tolerance range in mm									
js14	± 0.15	± 0.18	± 0.215	± 0.26	± 0.31	± 0.37	± 0.435	± 0.50	± 0.575
Tolerance range in µm									
k11	+75 0	+90 0	+110 0	+130 0	+160 0	+190 0	+220 0	+250 0	+290 0
H7	+12 0	+15 0	+18 0	+21 0	+25 0	+30 0	+35 0	+40 0	+46 0

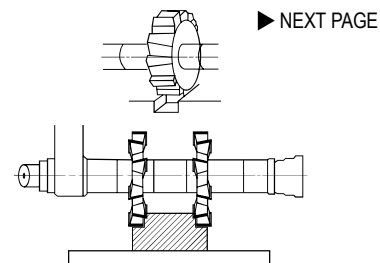

◎ : Excellent ○ : Good

ISO Material Description	P										M				K						
	Non-alloy steel					Low alloy steel					High alloyed steel, and tool steel				Stainless steel		Grey cast iron		Nodular cast iron		Malleable cast iron
VDI 3323	1	2	3	4	5	6	7	8	9	10	11	12	13	14	15	16	17	18	19	20	
HRC	13	25	28	32	10	29	32	38	15	35	15	23	10	10	26	3	25	42	21		
HB	125	190	250	270	300	180	275	300	350	200	325	200	240	180	180	260	160	250	130	230	
Recommended	◎	◎	◎	◎	◎	◎	◎	◎	○	◎	◎	◎	◎	◎	◎	◎	◎	◎	◎	◎	



ISO Material Description	N					S					H										
	Aluminum-wrought alloy		Aluminum-cast, alloyed			Copper and Copper Alloys (Bronze / Brass)			Non Metallic Materials		Heat Resistant Super Alloys			Titanium Alloys		Hardened steel	Chilled Cast Iron	Hardened Cast Iron			
VDI 3323	21	22	23	24	25	26	27	28	29	30	31	32	33	34	35	36	37	38	39	40	41
HRC	21	22	23	24	25	26	27	28	29	30	31	32	33	34	35	36	37	38	39	40	41
HB	60	100	75	90	130	110	90	100			15	30	25	38	34	400 Rm	1050 Rm	550	630	400	550
Recommended	◎	◎	◎	◎	◎	◎	◎	◎	◎	◎	◎	◎	◎	◎	◎	◎	◎	◎	◎	◎	◎

HSS-E, SIDE AND FACE MILLING CUTTERS with STAGGERED TEETH

- HSS-E, SCHEIBENFRÄSER mit KREUZVERZAHNT
- Fraise HSS-E 3 Tailles, denture alternée
- FRESE A DISCO A TRE TAGLI - DENTI ALTERNATI

▶ The type of cutter is recommended for slotting operations.
The alternate spiral effectively counteracts all tendency to chatter.

▶ Dieser Typ ist zum Schlitzfräsen geeignet. Das alternierende Spiral wirkt allen Schnatterbewegungen entgegen.




HSS-E
DIN 885-A
H
P.817

Unit : mm

EDP No.	Cutter Diameter	Width of Face	Internal Diameter	No. of Teeth
	D(js14)	S(k11)	d(H7)	Z
ML10220004	200.0	16	40	30
ML10220005	200.0	18	40	30
ML10220006	200.0	20	40	30
ML10220007	200.0	22	40	30
ML10220008	200.0	25	40	30

Tolerances according to DIN 7160 & 7161

Nominal-Diameter in mm									
	over 3 to 6	over 6 to 10	over 10 to 18	over 18 to 30	over 30 to 50	over 50 to 80	over 80 to 120	over 120 to 180	over 180 to 250
Tolerance range in mm									
js14	± 0.15	± 0.18	± 0.215	± 0.26	± 0.31	± 0.37	± 0.435	± 0.50	± 0.575
Tolerance range in µm									
k11	+75 0	+90 0	+110 0	+130 0	+160 0	+190 0	+220 0	+250 0	+290 0
H7	+12 0	+15 0	+18 0	+21 0	+25 0	+30 0	+35 0	+40 0	+46 0





◎ : Excellent ○ : Good

ISO	P										M				K						
	Non-alloy steel					Low alloy steel					High alloyed steel, and tool steel				Stainless steel		Grey cast iron		Nodular cast iron		Malleable cast iron
VDI 3323	1	2	3	4	5	6	7	8	9	10	11	12	13	14	15	16	17	18	19	20	
HRc	13	13	25	28	32	10	29	32	38	15	35	15	23	10	10	26	3	25	42	55	
HB	125	190	250	270	300	180	275	300	350	200	325	200	240	180	180	260	160	250	130	230	
Recommended	◎	◎	◎	◎	◎	◎	◎	◎	○	◎	○										

ISO	N					S										H					
	Aluminum-wrought alloy		Aluminum-cast, alloyed			Copper and Copper Alloys (Bronze / Brass)			Non Metallic Materials		Heat Resistant Super Alloys					Titanium Alloys		Hardened steel	Chilled Cast Iron	Hardened Cast Iron	
VDI 3323	21	22	23	24	25	26	27	28	29	30	31	32	33	34	35	36	37	38	39	40	41
HRc											15	30	25	38	34			55	60	42	55
HB	60	100	75	90	130	110	90	100			200	280	250	350	320	400 Rm	1050 Rm	550	630	400	550
Recommended	○	○	○	○	○																

HSSCo8, MULTI FLUTE SHELL END MILL

- HSSCo8, MULTI SCHNEIDEN WALZENSTIRNFRÄSER
- Fraise HSSCo8, multi-dents trou lisse
- FRESA CILINDRICA FRONTALE, MULTI TAGLIENTE



HSS Co8
DIN 841
N
6-10
30°
P.818

Unit : mm

EDP No.	Mill Diameter	Width of Face	Internal Diameter	No. of Teeth
	D	S	d	Z
E2675300	30.0	30	● 13	6
E2675350	35.0	35	● 16	6
E2675400	40.0	20	● 16	8
E2675402	40.0	40	● 16	8
E2675500	50.0	25	22	8
E2675502	50.0	50	22	8
E2675600	60.0	30	27	8
E2675601	60.0	60	27	8
E2675750	75.0	35	27	10
E2675751	75.0	75	27	10
E2675900	90.0	35	27	10
E2675902	110.0	35	32	10

- Tolerance of Internal Diameter = +0.018 ~ 0
- ▶ TIN-COATING, TiCN-COATING & TiAIN-COATING is available on your request.

HSS Co8
DIN 1880
N
8-14
30°
P.818

Unit : mm

EDP No.	Mill Diameter	Width of Face	Internal Diameter	No. of Teeth
	D	S	d	Z
E2675401	40.0	32	● 16	8
E2675501	50.0	36	22	8
E2675630	63.0	40	27	8
E2675800	80.0	45	27	10
E2675901	100.0	50	32	10
E2675903	125.0	56	40	12
E2675904	160.0	63	50	14

- Tolerance of Internal Diameter = +0.018 ~ 0
- ▶ TIN-COATING, TiCN-COATING & TiAIN-COATING is available on your request.

Mill Dia. Tolerance(mm)	Width of Face Tolerance(mm)	Internal Dia. Tolerance(mm)
+ 0.25 - 0.15	+ 0.5 - 0	+ 0.02 - 0

◎ : Excellent ○ : Good

ISO Material Description	P										M			K							
	Non-alloy steel					Low alloy steel					High alloyed steel, and tool steel			Stainless steel			Grey cast iron		Nodular cast iron		Malleable cast iron
VDI 3323	1	2	3	4	5	6	7	8	9	10	11	12	13	14	15	16	17	18	19	20	
HRC	13	25	28	32	10	29	32	38	15	35	15	23	10	10	26	3	25	42	55		
HB	125	190	250	270	300	180	275	300	350	200	325	200	240	180	180	260	160	250	130	230	
Recommended	◎	◎	◎	◎	◎	◎	◎	◎	◎	◎	○	◎	◎	◎	◎	◎	◎	◎	◎	◎	

ISO Material Description	N					S										H					
	Aluminum-wrought alloy		Aluminum-cast, alloyed			Copper and Copper Alloys (Bronze / Brass)			Non Metallic Materials		Heat Resistant Super Alloys					Titanium Alloys		Hardened steel	Chilled Cast Iron	Hardened Cast Iron	
VDI 3323	21	22	23	24	25	26	27	28	29	30	31	32	33	34	35	36	37	38	39	40	41
HRC	21	22	23	24	25	26	27	28	29	30	31	32	33	34	35	36	37	38	39	40	41
HB	60	100	75	90	130	110	90	100			200	280	250	350	320	400 Rm	1050 Rm	550	630	400	550
Recommended	◎	◎	◎	◎	◎	◎	◎	◎	◎	◎	◎	◎	◎	◎	◎	◎	◎	◎	◎	◎	◎

CBN END MILLS

i-Xmill END MILLS

i-SMART MODULAR END MILLS

X5070 END MILLS

4G MILL END MILLS

X-POWER PRO END MILLS

TitaNox-POWER END MILLS

JET-POWER END MILLS

V7 PLUS END MILLS

ALU-POWER HPC END MILLS

ALU-POWER END MILLS

D-POWER GRAPHITE END MILLS

D-POWER CFRP END MILLS

ROUTERS

CRX S END MILLS

K-2 END MILLS

ONLY ONE COATED PM60 END MILLS

TANK-POWER END MILLS



GENERAL HSS END MILLS

MILLING CUTTERS

TECHNICAL DATA

HSSCo8, MULTI FLUTE SHELL END MILL for ALUMINUM

- HSSCo8, MULTI SCHNEIDEN WALZENSTIRNFRÄSER für ALUMINIUM
- Fraise HSSCo8, multi-dents trou lisse pour aluminium
- FRESA CILINDRICA FRONTALE MULTI TAGLIENTE, PER ALLUMINIO



HSS Co8
DIN 841
W
4&6
42°
P.818

Unit : mm

EDP No.	Mill Diameter	Width of Face	Internal Diameter	No. of Teeth
	D	S	d	Z
E2676300	30.0	30	● 13	4
E2676400	40.0	20	● 16	4
E2676402	40.0	40	● 16	4
E2676500	50.0	25	22	6
E2676502	50.0	50	22	6
E2676600	60.0	30	27	6
E2676601	60.0	60	27	6
E2676750	75.0	75	27	6

- Tolerance of Internal Diameter = +0.018 ~ 0
- ▶ TIN-COATING, TiCN-COATING & TiAIN-COATING is available on your request.

HSS Co8
DIN 1880
W
4&6
42°
P.818

Unit : mm

EDP No.	Mill Diameter	Width of Face	Internal Diameter	No. of Teeth
	D	S	d	Z
E2676401	40.0	32	● 16	4
E2676501	50.0	36	22	6
E2676630	63.0	40	27	6
E2676800	80.0	45	27	6
E2676901	100.0	50	32	6

- Tolerance of Internal Diameter = +0.018 ~ 0
- ▶ TIN-COATING, TiCN-COATING & TiAIN-COATING is available on your request.

Mill Dia. Tolerance(mm)	Width of Face Tolerance(mm)	Internal Dia. Tolerance(mm)
+ 0.25	+ 0.5	+ 0.02
- 0.15	- 0	- 0



◎ : Excellent ○ : Good

ISO Material Description	P										M				K							
	Non-alloy steel					Low alloy steel					High alloyed steel, and tool steel				Stainless steel				Grey cast iron		Nodular cast iron	
VDI 3323	1	2	3	4	5	6	7	8	9	10	11	12	13	14	15	16	17	18	19	20		
HRc	13	25	28	32	10	29	32	38	15	35	15	23	10	15	26	3	25	42	21			
HB	125	190	250	270	300	180	275	300	350	200	200	240	180	180	260	160	250	130	230			
Recommended	○	○	○	○	○	○	○	○	○	○	○	○	○	○	○	○	○	○	○	○		

ISO Material Description	N										S							H			
	Aluminum-wrought alloy		Aluminum-cast, alloyed			Copper and Copper Alloys (Bronze / Brass)			Non Metallic Materials		Heat Resistant Super Alloys							Titanium Alloys		Hardened steel	Chilled Cast Iron
VDI 3323	21	22	23	24	25	26	27	28	29	30	31	32	33	34	35	36	37	38	39	40	41
HRc	60	100	75	90	130	110	90	100			200	280	250	350	320	400 Rm	1050 Rm	550	630	400	550
Recommended	◎	◎	◎	◎	◎	◎	◎	◎	◎	◎	◎	◎	◎	◎	◎	◎	◎	◎	◎	◎	◎

HSSCo8, MULTI FLUTE ROUGHING SHELL END MILL - COARSE

- HSSCo8, MULTI SCHNEIDEN WALZENSTIRN-SCHRUPPFÄRÄSER - GROBES
- Fraise HSSCo8, multi-dents trou lisse, ébauche, pas grossier
- FRESA CILINDRICA FRONTALE MULTI TAGLIENTE, PER SGROSSATURA



HSS Co8
DIN 841
NR
6-12
30°
P.819

Unit : mm

EDP No.	Mill Diameter	Width of Face	Internal Diameter	No. of Teeth
	D	S	d	
E2677401	40.0	40	● 16	6
E2677501	50.0	50	22	8
E2677600	60.0	30	27	8
E2677601	60.0	60	27	8
E2677750	75.0	35	27	10
E2677751	75.0	75	27	10
E2677900	90.0	35	27	10
E2677902	110.0	35	32	12

- Tolerance of Internal Diameter = +0.018 ~ 0
- ▶ TiN-COATING, TiCN-COATING & TiAlN-COATING is available on your request.

HSS Co8
DIN 1880
NR
6-12
30°
P.819

Unit : mm

EDP No.	Mill Diameter	Width of Face	Internal Diameter	No. of Teeth
	D	S	d	
E2677400	40.0	32	● 16	6
E2677500	50.0	36	22	8
E2677630	63.0	40	27	8
E2677800	80.0	45	27	10
E2677901	100.0	50	32	10
E2677903	125.0	56	40	12
E2677904	160.0	63	50	12

- Tolerance of Internal Diameter = +0.018 ~ 0
- ▶ TiN-COATING, TiCN-COATING & TiAlN-COATING is available on your request.

Mill Dia. Tolerance(mm)	Width of Face Tolerance(mm)	Internal Dia. Tolerance(mm)
+0.25 -0.15	+0.5 -0	+0.02 -0

◎ : Excellent ○ : Good

ISO Material Description	P											M			K					
	Non-alloy steel					Low alloy steel				High alloyed steel, and tool steel		Stainless steel			Grey cast iron		Nodular cast iron		Malleable cast iron	
VDI 3323	1	2	3	4	5	6	7	8	9	10	11	12	13	14	15	16	17	18	19	20
HRc	13	25	28	32	10	29	32	38	15	35	15	23	10	10	26	3	25	42	21	
HB	125	190	250	270	300	180	275	300	350	200	325	200	240	180	180	260	160	250	130	230
Recommended	◎	◎	◎	◎	○	◎	◎	○	○	◎	○	◎	◎	◎	◎	◎	◎	◎	◎	◎

ISO Material Description	N					S										H					
	Aluminum-wrought alloy		Aluminum-cast, alloyed			Copper and Copper Alloys (Bronze / Brass)			Non Metallic Materials		Heat Resistant Super Alloys					Titanium Alloys		Hardened steel	Chilled Cast Iron	Hardened Cast Iron	
VDI 3323	21	22	23	24	25	26	27	28	29	30	31	32	33	34	35	36	37	38	39	40	41
HRc	60	100	75	90	130	110	90	100			15	30	25	38	34	55	60	55	60	42	55
HB	60	100	75	90	130	110	90	100			200	280	250	350	320	400 Rm	1050 Rm	550	630	400	550
Recommended	○	○	○	○	○	○	○	○	○	○	○	○	○	○	○	○	○	○	○	○	○

CBN END MILLS

i-Xmill END MILLS

i-SMART MODULAR END MILLS

X5070 END MILLS

4G MILL END MILLS

X-POWER PRO END MILLS

TitaNox-POWER END MILLS

JET-POWER END MILLS

V7 PLUS END MILLS

ALU-POWER HPC END MILLS

ALU-POWER END MILLS

D-POWER GRAPHITE END MILLS

D-POWER CFRP END MILLS

ROUTERS

CRX S END MILLS

K-2 END MILLS

ONLY ONE COATED PM60 END MILLS

TANK-POWER END MILLS



GENERAL HSS END MILLS

MILLING CUTTERS

TECHNICAL DATA

HSSCo8, MULTI FLUTE ROUGHING SHELL END MILL - FINE

- **HSSCo8, MULTI SCHNEIDEN WALZENSTIRN-SCHRUPPFÄRÄSER - FEINES**
- **Fraise HSSCo8, multi-dents trou lisse, ébauche, pas fin**
- **FRESA CILINDRICA FRONTALE MULTI TAGLIENTE, PER SGROSSATURA**



HSS Co8
DIN 841
HR
6-12
30°
P.819

Unit : mm

EDP No.	Mill Diameter	Width of Face	Internal Diameter	No. of Teeth
	D	S	d	Z
E2678401	40.0	40	● 16	6
E2678501	50.0	50	22	8
E2678600	60.0	30	27	8
E2678601	60.0	60	27	8
E2678750	75.0	35	27	10
E2678751	75.0	75	27	10
E2678900	90.0	35	27	10
E2678902	110.0	35	32	12

- Tolerance of Internal Diameter = +0.018 ~ 0
- ▶ TIN-COATING, TiCN-COATING & TiAIN-COATING is available on your request.

HSS Co8
DIN 1880
HR
6-12
30°
P.819

Unit : mm

EDP No.	Mill Diameter	Width of Face	Internal Diameter	No. of Teeth
	D	S	d	Z
E2678400	40.0	32	● 16	6
E2678500	50.0	36	22	8
E2678630	63.0	40	27	8
E2678800	80.0	45	27	10
E2678901	100.0	50	32	10
E2678903	125.0	56	40	12
E2678904	160.0	63	50	12

- Tolerance of Internal Diameter = +0.018 ~ 0
- ▶ TIN-COATING, TiCN-COATING & TiAIN-COATING is available on your request.

Mill Dia. Tolerance(mm)	Width of Face Tolerance(mm)	Internal Dia. Tolerance(mm)
+ 0.25 - 0.15	+ 0.5 - 0	+ 0.02 - 0



◎ : Excellent ○ : Good

ISO Material Description	P										M			K						
	Non-alloy steel					Low alloy steel					High alloyed steel, and tool steel			Stainless steel			Grey cast iron		Nodular cast iron	
VDI 3323	1	2	3	4	5	6	7	8	9	10	11	12	13	14	15	16	17	18	19	20
HRc	13	25	28	32	10	29	32	38	15	35	15	23	10	10	10	26	3	25	21	
HB	125	190	250	270	300	180	275	300	350	200	325	200	240	180	180	260	160	250	130	230
Recommended	◎	◎	◎	◎	◎	◎	◎	◎	◎	◎	◎	◎	◎	◎	◎	◎	◎	◎	◎	◎

ISO Material Description	N					S										H					
	Aluminum-wrought alloy		Aluminum-cast, alloyed			Copper and Copper Alloys (Bronze / Brass)			Non Metallic Materials		Heat Resistant Super Alloys					Titanium Alloys		Hardened steel	Chilled Cast Iron	Hardened Cast Iron	
VDI 3323	21	22	23	24	25	26	27	28	29	30	31	32	33	34	35	36	37	38	39	40	41
HRc	21	22	23	24	25	26	27	28	29	30	31	32	33	34	35	36	37	38	39	40	41
HB	60	100	75	90	130	110	90	100			200	280	250	350	320	400 Rm	1050 Rm	550	630	400	550
Recommended	◎	◎	◎	◎	◎	◎	◎	◎	◎	◎	◎	◎	◎	◎	◎	◎	◎	◎	◎	◎	◎

HSSCo8, MULTI FLUTE ROUGHING & FINISHING SHELL END MILL

- HSSCo8, MULTI SCHNEIDEN WALZENSTIRN-SCHRUPPSCHLICHTFRÄSER
- Fraise HSSCo8, multi-dents trou lisse, ébauche et finition
- FRESA CILINDRICA FRONTALE MULTI TAGLIENTE, SEMI FINITURA



HSS Co8
DIN 841
NF
6-12
30°

P.819

Unit : mm

EDP No.	Mill Diameter	Width of Face	Internal Diameter	No. of Teeth
	D	S	d	Z
E2679401	40.0	40	● 16	6
E2679501	50.0	50	22	8
E2679600	60.0	30	27	8
E2679601	60.0	60	27	8
E2679750	75.0	35	27	10
E2679751	75.0	75	27	10
E2679900	90.0	35	27	10
E2679902	110.0	35	32	12

- Tolerance of Internal Diameter = +0.018 ~ 0
- ▶ TIN-COATING, TiCN-COATING & TiAlN-COATING is available on your request.

HSS Co8
DIN 1880
NF
6-12
30°

P.819

Unit : mm

EDP No.	Mill Diameter	Width of Face	Internal Diameter	No. of Teeth
	D	S	d	Z
E2679400	40.0	32	● 16	6
E2679500	50.0	36	22	8
E2679630	63.0	40	27	8
E2679800	80.0	45	27	10
E2679901	100.0	50	32	10
E2679903	125.0	56	40	12
E2679904	160.0	63	50	12

- Tolerance of Internal Diameter = +0.018 ~ 0
- ▶ TIN-COATING, TiCN-COATING & TiAlN-COATING is available on your request.

Mill Dia. Tolerance(mm)	Width of Face Tolerance(mm)	Internal Dia. Tolerance(mm)
+ 0.25 - 0.15	+ 0.5 - 0	+ 0.02 - 0

◎ : Excellent ○ : Good

ISO Material Description	P										M			K							
	Non-alloy steel					Low alloy steel					High alloyed steel, and tool steel			Stainless steel			Grey cast iron		Nodular cast iron		Malleable cast iron
VDI 3323	1	2	3	4	5	6	7	8	9	10	11	12	13	14	15	16	17	18	19	20	
HRC	13	25	28	32	10	29	32	38	15	35	15	23	10	10	26	3	25	42	55		
HB	125	190	250	270	300	180	275	300	350	200	325	200	240	180	180	260	160	250	130	230	
Recommended	◎	◎	◎	◎	○	◎	◎	○	○	◎	◎	○	○	○	○	○	○	○	○	○	○

ISO Material Description	N					S										H											
	Aluminum-wrought alloy		Aluminum-cast, alloyed			Copper and Copper Alloys (Bronze / Brass)			Non Metallic Materials		Heat Resistant Super Alloys					Titanium Alloys		Hardened steel	Chilled Cast Iron	Hardened Cast Iron							
VDI 3323	21	22	23	24	25	26	27	28	29	30	31	32	33	34	35	36	37	38	39	40	41						
HRC	60	100	75	90	130	110	90	100			15	30	25	38	34	200	280	250	350	320	400 Rm	1050 Rm	550	630	400	550	
Recommended	○	○	○	○	○	○	○	○	○	○	○	○	○	○	○	○	○	○	○	○	○	○	○	○	○	○	○

CBN END MILLS

i-Xmill END MILLS

i-SMART MODULAR END MILLS

X5070 END MILLS

4G MILL END MILLS

X-POWER PRO END MILLS

TitaNox-POWER END MILLS

JET-POWER END MILLS

V7 PLUS END MILLS

ALU-POWER HPC END MILLS

ALU-POWER END MILLS

D-POWER GRAPHITE END MILLS

D-POWER CFRP END MILLS

ROUTERS

CRX S END MILLS

K-2 END MILLS

ONLY ONE COATED PM60 END MILLS

TANK-POWER END MILLS

GENERAL HSS END MILLS

MILLING CUTTERS

TECHNICAL DATA

HSSCo8, 4 FLUTE CORNER ROUNDING CUTTERS


● **HSSCo8, 4 SCHNEIDEN VIERTELKREISFRÄSER**

● **Fraise HSSCo8, 1/4 de cercle, 4 dents**

● **4 TAGLIENTI PER RAGGIATURA DI SPIGOLI**

▶ These tools can be adapted for many screw machine applications as end forming tools to form a specific radius.

▶ Dieses Werkzeug kann an vielen Screw maschine als Finishingtool für spezielle Radien montiert werden.

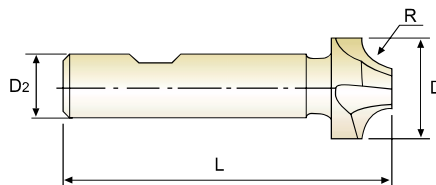

HSS Co8
DIN 6518
N
4
0°
DIN 1835B
P.820

Unit : mm

EDP No.	Radius	Outside Diameter	Shank Diameter	Overall Length
	R(H11)	D	D2(h6)	L
E2498010	R1.0	8.0	10	60
E2498015	R1.5	9.0	10	60
E2498020	R2.0	10.0	10	60
E2498025	R2.5	11.0	10	60
E2498030	R3.0	12.0	12	60
E2498035	R3.5	13.0	12	60
E2498040	R4.0	14.0	12	60
E2498045	R4.5	15.0	12	60
E2498050	R5.0	16.0	12	60
E2498055	R5.5	19.0	16	67
E2498060	R6.0	20.0	16	67
E2498065	R6.5	21.0	16	71
E2498070	R7.0	22.0	16	71
E2498075	R7.5	23.0	16	71
E2498080	R8.0	24.0	16	71
E2498085	R8.5	25.0	25	85
E2498090	R9.0	26.0	25	85
E2498095	R9.5	27.0	25	85

▶ TiN-COATING, TiCN-COATING & TiAIN-COATING is available on your request.

▶ NEXT PAGE

Tolerances according to DIN 7160 & 7161

	Nominal-Diameter in mm					
	from 1 to 3	over 3 to 6	over 6 to 10	over 10 to 18	over 18 to 30	over 30 to 50
	Tolerance range in μm					
H11	+60 0	+75 0	+90 0	+110 0	+130 0	+160 0
h6	0 -6	0 -8	0 -9	0 -11	0 -13	0 -16

◎ : Excellent ○ : Good

ISO Material Description	P										M			K						
	Non-alloy steel					Low alloy steel					High alloyed steel, and tool steel			Stainless steel			Grey cast iron		Nodular cast iron	
VDI 3323	1	2	3	4	5	6	7	8	9	10	11	12	13	14	15	16	17	18	19	20
HRc	13	25	28	32	10	29	32	38	15	35	15	23	10	10	26	3	25			
HB	125	190	250	270	300	180	275	300	350	200	325	200	240	180	180	260	160	250	130	230
Recommended	◎	◎	◎	◎	◎	◎	◎	◎	◎	◎	◎	◎	◎	◎	◎	◎	◎	◎	◎	◎


ISO Material Description	N					S										H					
	Aluminum-wrought alloy		Aluminum-cast, alloyed			Copper and Copper Alloys (Bronze / Brass)			Non Metallic Materials		Heat Resistant Super Alloys					Titanium Alloys		Hardened steel	Chilled Cast Iron	Hardened Cast Iron	
VDI 3323	21	22	23	24	25	26	27	28	29	30	31	32	33	34	35	36	37	38	39	40	41
HRc											15	30	25	38	34			55	60	42	55
HB	60	100	75	90	130	110	90	100			200	280	250	350	320	400 Rm	1050 Rm	550	630	400	550
Recommended	◎	◎	◎	◎	◎	◎	◎	◎	◎	◎	◎	◎	◎	◎	◎	◎	◎	◎	◎	◎	◎

HSSCo8, 4 FLUTE CORNER ROUNDING CUTTERS

- HSSCo8, 4 SCHNEIDEN VIERTELKREISFRÄSER
- Fraise HSSCo8, 1/4 de cercle, 4 dents
- 4 TAGLIANTI PER RAGGIATURA DI SPIGOLI

► These tools can be adapted for many screw machine applications as end forming tools to form a specific radius.

► Dieses Werkzeug kann an vielen Scrow maschine als Finishingtool für spezielle Radien montiert werden.

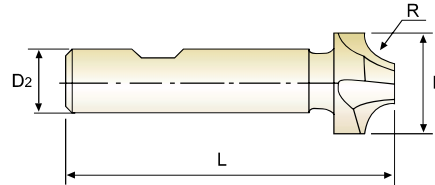

Unit : mm

EDP No.	Radius	Outside Diameter	Shank Diameter	Overall Length
	R(H11)	D	D2(h6)	L
E2498100	R10.0	28.0	25	85
E2498105	R10.5	31.0	25	90
E2498110	R11.0	32.0	25	90
E2498120	R12.0	34.0	25	90
E2498125	R12.5	41.0	25	100
E2498130	R13.0	42.0	25	100
E2498140	R14.0	44.0	25	100
E2498150	R15.0	46.0	25	100
E2498160	R16.0	48.0	25	100
E2498180	R18.0	52.0	32	112
E2498200	R20.0	56.0	32	112

► TIN-COATING, TiCN-COATING & TiAIN-COATING is available on your request.

Tolerances according to DIN 7160 & 7161

	Nominal-Diameter in mm					
	from 1 to 3	over 3 to 6	over 6 to 10	over 10 to 18	over 18 to 30	over 30 to 50
	Tolerance range in μm					
H11	+60 0	+75 0	+90 0	+110 0	+130 0	+160 0
h6	0 -6	0 -8	0 -9	0 -11	0 -13	0 -16

◎ : Excellent ○ : Good

ISO Material Description	P										M			K							
	Non-alloy steel					Low alloy steel					High alloyed steel, and tool steel			Stainless steel			Grey cast iron		Nodular cast iron		Malleable cast iron
VDI 3323	1	2	3	4	5	6	7	8	9	10	11	12	13	14	15	16	17	18	19	20	
HRc	13	25	28	32	10	29	32	38	15	35	15	23	10	10	26	3	25	42	55		
HB	125	190	250	270	300	180	275	300	350	200	325	200	240	180	180	260	160	250	130	230	
Recommended	◎	◎	◎	◎	○	◎	◎	○	○	◎	◎	◎	◎	◎	◎	◎	◎	◎	◎	◎	
ISO Material Description	N										S						H				
	Aluminum-wrought alloy		Aluminum-cast, alloyed			Copper and Copper Alloys (Bronze / Brass)			Non Metallic Materials		Heat Resistant Super Alloys						Titanium Alloys		Hardened steel	Chilled Cast Iron	Hardened Cast Iron
VDI 3323	21	22	23	24	25	26	27	28	29	30	31	32	33	34	35	36	37	38	39	40	41
HRc	60	100	75	90	130	110	90	100			15	30	25	38	34	400 Rm	1050 Rm	55	60	42	55
HB	60	100	75	90	130	110	90	100			200	280	250	350	320	400 Rm	1050 Rm	550	630	400	550
Recommended	○	○	○	○	○	○	○	○	○	○	○	○	○	○	○	○	○	○	○	○	○



RECOMMENDED CUTTING CONDITIONS
EMPFOHLENE SCHNEIDPARAMETER

ML012, ML112, ML022, ML122, ML212, ML222 SERIES

MULTI FLUTE DOVETAIL CUTTERS
TYPE 'A', 'C', 'E'

Vc = m/min.
fz = mm/tooth
RPM = rev./min.
FEED = mm/min.

ISO	VDI 3323	Material Description	Parameter	Diameter (Ø)							
				16.0	20.0	25.0	32.0	40.0	50.0	63.0	
P	1	Non-alloy steel	Vc	30	30	30	30	30	30	30	30
			fz	0.03	0.037	0.026	0.042	0.043	0.03	0.031	
			RPM	597	477	382	298	239	191	152	
	FEED		107	106	79	125	123	92	75		
	2		Vc	15	15	15	15	15	15	15	
			fz	0.031	0.036	0.031	0.041	0.043	0.026	0.031	
			RPM	298	239	191	149	119	95	76	
	FEED		56	52	47	61	62	40	38		
	3-4		Vc	10	10	10	10	10	10	10	
			fz	0.031	0.035	0.028	0.04	0.042	0.03	0.033	
			RPM	199	159	127	99	80	64	51	
FEED	37	33	29	40	40	31	27				
5	Vc	10	10	10	10	10	10	10			
	fz	0.021	0.02	0.02	0.02	0.022	0.02	0.023			
	RPM	199	159	127	99	80	64	51			
FEED	25	19	20	20	21	20	19				
6	Vc	15	15	15	15	15	15	15			
	fz	0.031	0.036	0.031	0.041	0.043	0.026	0.031			
	RPM	298	239	191	149	119	95	76			
FEED	56	52	47	61	62	40	38				
7	Vc	10	10	10	10	10	10	10			
	fz	0.031	0.035	0.028	0.04	0.042	0.03	0.033			
	RPM	199	159	127	99	80	64	51			
FEED	37	33	29	40	40	31	27				
8-9	Vc	10	10	10	10	10	10	10			
	fz	0.021	0.02	0.02	0.02	0.022	0.02	0.023			
	RPM	199	159	127	99	80	64	51			
FEED	25	19	20	20	21	20	19				
10	Vc	15	15	15	15	15	15	15			
	fz	0.031	0.036	0.031	0.041	0.043	0.026	0.031			
	RPM	298	239	191	149	119	95	76			
FEED	56	52	47	61	62	40	38				
11.1	Vc	10	10	10	10	10	10	10			
	fz	0.021	0.02	0.02	0.02	0.022	0.02	0.023			
	RPM	199	159	127	99	80	64	51			
FEED	25	19	20	20	21	20	19				
N	21~25	Aluminum-wrought alloy, Aluminum-cast, alloyed	Vc	95	85	90	90	95	85	90	
			fz	0.03	0.04	0.029	0.041	0.042	0.03	0.033	
			RPM	1890	1353	1146	895	756	541	455	
			FEED	340	325	266	367	381	260	240	

ML032, ML132, ML042, ML142, ML232, ML242 SERIES

MULTI FLUTE DOVETAIL CUTTERS
TYPE 'B', 'D', 'F'

Vc = m/min.
fz = mm/tooth
RPM = rev./min.
FEED = mm/min.

ISO	VDI 3323	Material Description	Parameter	Diameter (Ø)			
				16.0	20.0	25.0	32.0
P	1	Non-alloy steel	Vc	30	30	30	30
			fz	0.03	0.037	0.026	0.042
			RPM	597	477	382	298
			FEED	107	106	79	125
	2		Vc	15	15	15	15
			fz	0.031	0.036	0.031	0.041
			RPM	298	239	191	149
			FEED	56	52	47	61
	3-4		Vc	10	10	10	10
			fz	0.031	0.035	0.028	0.04
			RPM	199	159	127	99
			FEED	37	33	29	40
5	Vc	10	10	10	10		
	fz	0.021	0.02	0.02	0.02		
	RPM	199	159	127	99		
	FEED	25	19	20	20		
6	Vc	15	15	15	15		
	fz	0.031	0.036	0.031	0.041		
	RPM	298	239	191	149		
	FEED	56	52	47	61		
7	Vc	10	10	10	10		
	fz	0.031	0.035	0.028	0.04		
	RPM	199	159	127	99		
	FEED	37	33	29	40		
8-9	Vc	10	10	10	10		
	fz	0.021	0.02	0.02	0.02		
	RPM	199	159	127	99		
	FEED	25	19	20	20		
10	Vc	15	15	15	15		
	fz	0.031	0.036	0.031	0.041		
	RPM	298	239	191	149		
	FEED	56	52	47	61		
11.1	Vc	10	10	10	10		
	fz	0.021	0.02	0.02	0.02		
	RPM	199	159	127	99		
	FEED	25	19	20	20		
N	21~25	Aluminum-wrought alloy, Aluminum-cast, alloyed	Vc	95	85	90	90
			fz	0.03	0.04	0.029	0.041
			RPM	1890	1353	1146	895
			FEED	340	325	266	367



RECOMMENDED CUTTING CONDITIONS
EMPFOHLENE SCHNEIDPARAMETER

ML062, ML162, ML262 SERIES

MULTI FLUTES WOODRUFF KEYSEAT CUTTERS
TYPE 'B', 'D', 'F'

Vc = m/min.
fz = mm/tooth
RPM = rev./min.
FEED = mm/min.

ISO	VDI 3323	Material Description	Parameter	Diameter (Ø)								
				10.5	13.5	16.5	19.5	22.5	28.5	32.5	45.5	
P	1	Non-alloy steel	Vc	30	30	30	30	30	30	30	30	30
			fz	0.01	0.01	0.025	0.035	0.04	0.05	0.06	0.07	
			RPM	909	707	579	490	424	335	294	210	
	FEED		73	57	116	137	170	168	212	206		
	2		Vc	20	20	20	20	20	20	20	20	
			fz	0.01	0.01	0.025	0.035	0.04	0.05	0.06	0.07	
			RPM	606	472	386	326	283	223	196	140	
	FEED		49	38	77	91	113	112	141	137		
	3-4		Vc	15	15	15	15	15	15	15	15	
			fz	0.01	0.01	0.025	0.035	0.04	0.05	0.06	0.07	
			RPM	455	354	289	245	212	168	147	105	
FEED	36	28	58	69	85	84	106	103				
5	Vc	10	10	10	10	10	10	10	10			
	fz	0.01	0.01	0.025	0.035	0.04	0.05	0.06	0.07			
	RPM	303	236	193	163	141	112	98	70			
FEED	24	19	39	46	57	56	71	69				
6	Vc	20	20	20	20	20	20	20	20			
	fz	0.01	0.01	0.025	0.035	0.04	0.05	0.06	0.07			
	RPM	606	472	386	326	283	223	196	140			
FEED	49	38	77	91	113	112	141	137				
7	Vc	15	15	15	15	15	15	15	15			
	fz	0.01	0.01	0.025	0.035	0.04	0.05	0.06	0.07			
	RPM	455	354	289	245	212	168	147	105			
FEED	36	28	58	69	85	84	106	103				
8-9	Vc	10	10	10	10	10	10	10	10			
	fz	0.01	0.01	0.025	0.035	0.04	0.05	0.06	0.07			
	RPM	303	236	193	163	141	112	98	70			
FEED	24	19	39	46	57	56	71	69				
10	Vc	20	20	20	20	20	20	20	20			
	fz	0.01	0.01	0.025	0.035	0.04	0.05	0.06	0.07			
	RPM	606	472	386	326	283	223	196	140			
FEED	49	38	77	91	113	112	141	137				
11.1	Vc	10	10	10	10	10	10	10	10			
	fz	0.01	0.01	0.025	0.035	0.04	0.05	0.06	0.07			
	RPM	303	236	193	163	141	112	98	70			
FEED	24	19	39	46	57	56	71	69				
N	21~25	Aluminum-wrought alloy, Aluminum-cast, alloyed	Vc	100	100	100	100	100	100	90	100	
			fz	0.01	0.01	0.025	0.035	0.04	0.05	0.06	0.07	
			RPM	3032	2358	1929	1632	1415	1117	881	700	
			FEED	243	189	386	457	566	558	635	686	

ML072, ML172, ML272 SERIES

MULTI FLUTE T-SLOT CUTTERS
TYPE 'AA', 'AB', 'AD'

Vc = m/min.
fz = mm/tooth
RPM = rev./min.
FEED = mm/min.

ISO	VDI 3323	Material Description	Parameter	Diameter (Ø)											
				12.5	16.0	18.0	19.0	21.0	22.0	25.0	28.0	32.0	50.0	63.0	
P	1	Non-alloy steel	Vc	30	30	30	30	30	30	30	30	30	30	40	50
			fz	0.008	0.013	0.014	0.017	0.018	0.021	0.028	0.036	0.036	0.037	0.036	
			RPM	764	597	531	503	455	434	382	341	298	255	253	
	FEED		37	47	45	51	49	55	64	74	86	75	73		
	2		Vc	15	15	15	15	15	15	15	15	15	15	20	25
			fz	0.007	0.011	0.012	0.013	0.016	0.019	0.026	0.037	0.035	0.037	0.04	
			RPM	382	298	265	251	227	217	191	171	149	127	126	
	FEED		16	20	19	20	22	25	30	38	42	38	40		
	3-4		Vc	10	10	10	10	10	10	10	10	10	10	15	15
			fz	0.005	0.007	0.01	0.014	0.017	0.019	0.022	0.028	0.025	0.028	0.029	
			RPM	255	199	177	168	152	145	127	114	99	95	76	
	FEED		8	8	11	14	15	16	17	19	20	21	18		
6	Vc	15	15	15	15	15	15	15	15	15	15	20	25		
	fz	0.007	0.011	0.012	0.013	0.016	0.019	0.026	0.037	0.035	0.037	0.04			
	RPM	382	298	265	251	227	217	191	171	149	127	126			
FEED	16	20	19	20	22	25	30	38	42	38	40				
7	Vc	10	10	10	10	10	10	10	10	10	10	15	15		
	fz	0.005	0.007	0.01	0.014	0.017	0.019	0.022	0.028	0.025	0.028	0.029			
	RPM	255	199	177	168	152	145	127	114	99	95	76			
FEED	8	8	11	14	15	16	17	19	20	21	18				
10	Vc	15	15	15	15	15	15	15	15	15	15	20	25		
	fz	0.007	0.011	0.012	0.013	0.016	0.019	0.026	0.037	0.035	0.037	0.04			
	RPM	382	298	265	251	227	217	191	171	149	127	126			
FEED	16	20	19	20	22	25	30	38	42	38	40				
N	21~25	Aluminum-wrought alloy, Aluminum-cast, alloyed	Vc	90	90	95	90	95	90	90	90	90	125	145	
			fz	0.008	0.013	0.015	0.017	0.019	0.021	0.026	0.034	0.034	0.036	0.036	
			RPM	2292	1790	1680	1508	1440	1302	1146	1023	895	796	733	
			FEED	110	140	151	154	164	164	179	209	244	229	211	

CBN END MILLS

i-Xmill END MILLS

i-SMART MODULAR END MILLS

X5070 END MILLS

4G MILL END MILLS

X-POWER PRO END MILLS

TitaNox-POWER END MILLS

JET-POWER END MILLS

V7 PLUS END MILLS

ALU-POWER HPC END MILLS

ALU-POWER END MILLS

D-POWER GRAPHITE END MILLS

D-POWER CFRP END MILLS

ROUTERS

CRX S END MILLS

K-2 END MILLS

ONLY ONE COATED PM60 END MILLS

TANK-POWER END MILLS

GENERAL HSS END MILLS

MILLING CUTTERS


TECHNICAL DATA

ML092 SERIES

MULTI FLUTES SIDE AND FACE MILLING CUTTERS WITH STRAIGHT TEETH

Vc = m/min.
fz = mm/tooth
RPM = rev./min.
FEED = mm/min.

ISO	VDI 3323	Material Description	Parameter	Diameter (Ø)				
				50.0	63.0	80.0	100.0	125.0
P	1	Non-alloy steel	Vc	25	25	25	25	25
			fz	0.045	0.058	0.06	0.063	0.066
			RPM	159	126	99	80	64
	FEED		129	161	143	130	126	
	2		Vc	20	20	20	20	20
			fz	0.04	0.036	0.041	0.038	0.05
			RPM	127	101	80	64	51
	FEED		92	80	78	63	76	
	3-4		Vc	15	15	15	15	15
			fz	0.034	0.031	0.033	0.034	0.042
			RPM	95	76	60	48	38
FEED	58	52	47	42	48			
5	Vc	10	10	10	10	10		
	fz	0.031	0.029	0.03	0.03	0.036		
	RPM	64	51	40	32	25		
FEED	36	32	29	25	28			
6	Vc	20	20	20	20	20		
	fz	0.04	0.036	0.041	0.038	0.05		
	RPM	127	101	80	64	51		
FEED	92	80	78	63	76			
7	Vc	15	15	15	15	15		
	fz	0.034	0.031	0.033	0.034	0.042		
	RPM	95	76	60	48	38		
FEED	58	52	47	42	48			
8-9	Vc	10	10	10	10	10		
	fz	0.031	0.029	0.03	0.03	0.036		
	RPM	64	51	40	32	25		
FEED	36	32	29	25	28			
10	Vc	20	20	20	20	20		
	fz	0.04	0.036	0.041	0.038	0.05		
	RPM	127	101	80	64	51		
FEED	92	80	78	63	76			
11.1	Vc	10	10	10	10	10		
	fz	0.031	0.029	0.03	0.03	0.036		
	RPM	64	51	40	32	25		
FEED	36	32	29	25	28			
N	21~25	Aluminum-wrought alloy, Aluminum-cast, alloyed	Vc	100	100	100	100	100
			fz	0.018	0.023	0.026	0.024	0.033
			RPM	637	505	398	318	255
			FEED	206	256	248	199	252




MILLING DEPTH P = WIDTH OF FACES

ML102 SERIES

MULTI FLUTE SIDE AND FACE MILLING CUTTERS WITH STAGGERED TEETH

Vc = m/min.
fz = mm/tooth
RPM = rev./min.
FEED = mm/min.

ISO	VDI 3323	Material Description	Parameter	Diameter (Ø)						
				50.0	63.0	80.0	100.0	125.0	160.0	200.0
P	1	Non-alloy steel	Vc	25	25	25	25	25	25	25
			fz	0.058	0.08	0.081	0.081	0.072	0.081	0.079
			RPM	159	126	99	80	64	50	40
	2		FEED	129	162	145	129	101	105	94
			Vc	20	20	20	20	20	20	20
			fz	0.053	0.052	0.055	0.05	0.055	0.05	0.048
	3-4		RPM	127	101	80	64	51	40	32
			FEED	94	84	79	64	62	52	46
			Vc	15	15	15	15	15	15	15
	5		fz	0.044	0.043	0.044	0.044	0.045	0.044	0.041
			RPM	95	76	60	48	38	30	24
FEED		59	52	47	42	38	34	29		
6	Vc	10	10	10	10	10	10	10		
	fz	0.039	0.04	0.04	0.039	0.039	0.04	0.039		
	RPM	64	51	40	32	25	20	16		
7	FEED	35	32	29	25	22	21	19		
	Vc	20	20	20	20	20	20	20		
	fz	0.053	0.052	0.055	0.05	0.055	0.05	0.048		
8-9	RPM	127	101	80	64	51	40	32		
	FEED	94	84	79	64	62	52	46		
	Vc	15	15	15	15	15	15	15		
10	fz	0.044	0.043	0.044	0.044	0.045	0.044	0.041		
	RPM	95	76	60	48	38	30	24		
	FEED	59	52	47	42	38	34	29		
11.1	Vc	10	10	10	10	10	10	10		
	fz	0.039	0.04	0.04	0.039	0.039	0.04	0.039		
	RPM	64	51	40	32	25	20	16		
N	21~25	Aluminum-wrought alloy, Aluminum-cast, alloyed	FEED	35	32	29	25	22	21	19
			Vc	100	100	100	100	100	100	100
			fz	0.023	0.031	0.035	0.031	0.036	0.029	0.031
			RPM	637	505	398	318	255	199	159
			FEED	205	251	251	197	202	150	148



MILLING DEPTH P = WIDTH OF FACES

CBN END MILLS

i-Xmill END MILLS

i-SMART MODULAR END MILLS

X5070 END MILLS

4G MILL END MILLS

X-POWER PRO END MILLS

TitaNox-POWER END MILLS

JET-POWER END MILLS

V7 PLUS END MILLS

ALU-POWER HPC END MILLS

ALU-POWER END MILLS

D-POWER GRAPHITE END MILLS

D-POWER CFRP END MILLS

ROUTERS

CRX S END MILLS

K-2 END MILLS

ONLY ONE COATED PM60 END MILLS

TANK-POWER END MILLS

GENERAL HSS END MILLS


MILLING CUTTERS

TECHNICAL DATA

E2675 SERIES MULTI FLUTE SHELL END MILL


Vc = m/min.
fz = mm/tooth
RPM = rev./min.
FEED = mm/min.

ISO	VDI 3323	Material Description	Ae	Ap	Parameter	Diameter (Ø)						
						40.0	50.0	63.0	80.0	100.0	125.0	160.0
P	1-2	Non-alloy steel	0.75D	0.25D	Vc	30	30	30	30	30	30	30
					fz	0.07	0.078	0.092	0.1	0.115	0.12	0.131
					RPM	239	191	152	119	95	76	60
	FEED		134	119	112	119	110	110	109			
	3-4		0.75D	0.25D	Vc	25	25	25	25	25	25	30
					fz	0.075	0.077	0.091	0.1	0.119	0.113	0.119
					RPM	199	159	126	99	80	64	60
	FEED		119	98	92	99	95	86	99			
	5		0.75D	0.25D	Vc	20	20	20	20	20	20	20
					fz	0.071	0.078	0.09	0.094	0.117	0.108	0.116
					RPM	159	127	101	80	64	51	40
FEED	90	79	73	75	74	66	65					
6	0.75D	0.25D	Vc	30	30	30	30	30	30	30		
			fz	0.07	0.078	0.092	0.1	0.115	0.12	0.131		
			RPM	239	191	152	119	95	76	60		
FEED	134	119	112	119	110	110	109					
7	0.75D	0.25D	Vc	25	25	25	25	25	25	30		
			fz	0.075	0.077	0.091	0.1	0.119	0.113	0.119		
			RPM	199	159	126	99	80	64	60		
FEED	119	98	92	99	95	86	99					
8	0.75D	0.25D	Vc	20	20	20	20	20	20	20		
			fz	0.071	0.078	0.09	0.094	0.117	0.108	0.116		
			RPM	159	127	101	80	64	51	40		
FEED	90	79	73	75	74	66	65					
9	0.75D	0.25D	Vc	10	10	10	10	10	10	10		
			fz	0.078	0.08	0.1	0.1	0.117	0.146	0.125		
			RPM	80	64	51	40	32	25	20		
FEED	50	41	40	40	37	45	35					
10	0.75D	0.25D	Vc	30	30	30	30	30	30	30		
			fz	0.07	0.078	0.092	0.1	0.115	0.12	0.131		
			RPM	239	191	152	119	95	76	60		
FEED	134	119	112	119	110	110	109					
11.1	0.75D	0.25D	Vc	20	20	20	20	20	20	20		
			fz	0.071	0.078	0.09	0.094	0.117	0.108	0.116		
			RPM	159	127	101	80	64	51	40		
FEED	90	79	73	75	74	66	65					



E2676 SERIES MULTI FLUTE SHELL END MILL for ALUMINUM

ISO	VDI 3323	Material Description	Ae	Ap	Parameter	Diameter (Ø)							
						30.0	40.0	50.0	60.0	63.0	75.0	80.0	100.0
N	21~25	Aluminum-wrought alloy, Aluminum-cast, alloyed	0.75D	0.25D	Vc	100	105	95	95	95	105	100	100
					fz	0.05	0.06	0.069	0.1	0.115	0.13	0.128	0.151
					RPM	1061	836	605	504	480	446	398	318
					FEED	212	201	250	302	331	348	306	288




E2677, E2678 SERIES

MULTI FLUTE ROUGHING SHELL END MILL

Vc = m/min.
fz = mm/tooth
RPM = rev./min.
FEED = mm/min.

ISO	VDI 3323	Material Description	Ae	Ap	Parameter	Diameter (Ø)						
						40.0	50.0	63.0	80.0	100.0	125.0	160.0
P	1-2	Non-alloy steel	0.75D	0.25D	Vc	30	30	30	30	30	30	30
					fz	0.069	0.078	0.092	0.1	0.115	0.12	0.153
					RPM	239	191	152	119	95	76	60
	FEED		99	119	112	119	110	110	110			
	3-4		0.75D	0.25D	Vc	25	25	25	25	25	25	30
					fz	0.071	0.077	0.091	0.1	0.119	0.113	0.139
					RPM	199	159	126	99	80	64	60
	FEED		85	98	92	99	95	86	100			
	5		0.75D	0.25D	Vc	20	20	20	20	20	20	20
					fz	0.071	0.078	0.09	0.094	0.117	0.108	0.135
					RPM	159	127	101	80	64	51	40
FEED	68	79	73	75	74	66	64					
6	0.75D	0.25D	Vc	30	30	30	30	30	30	30		
			fz	0.069	0.078	0.092	0.1	0.115	0.12	0.153		
			RPM	239	191	152	119	95	76	60		
FEED	99	119	112	119	110	110	110					
7	0.75D	0.25D	Vc	25	25	25	25	25	25	30		
			fz	0.071	0.077	0.091	0.1	0.119	0.113	0.139		
			RPM	199	159	126	99	80	64	60		
FEED	85	98	92	99	95	86	100					
8	0.75D	0.25D	Vc	20	20	20	20	20	20	20		
			fz	0.071	0.078	0.09	0.094	0.117	0.108	0.135		
			RPM	159	127	101	80	64	51	40		
FEED	68	79	73	75	74	66	64					
9	0.75D	0.25D	Vc	10	10	10	10	10	10	10		
			fz	0.073	0.08	0.1	0.1	0.117	0.146	0.146		
			RPM	80	64	51	40	32	25	20		
FEED	35	41	40	40	37	45	35					
10	0.75D	0.25D	Vc	30	30	30	30	30	30	30		
			fz	0.069	0.078	0.092	0.1	0.115	0.12	0.153		
			RPM	239	191	152	119	95	76	60		
FEED	99	119	112	119	110	110	110					
11.1	0.75D	0.25D	Vc	20	20	20	20	20	20	20		
			fz	0.071	0.078	0.09	0.094	0.117	0.108	0.135		
			RPM	159	127	101	80	64	51	40		
FEED	68	79	73	75	74	66	64					



E2679 SERIES

MULTI FLUTE ROUGHING & FINISHING SHELL END MILL

ISO	VDI 3323	Material Description	Ae	Ap	Parameter	Diameter (Ø)						
						40.0	50.0	63.0	80.0	100.0	125.0	160.0
P	1-2	Non-alloy steel	0.75D	0.25D	Vc	30	30	30	30	30	30	30
					fz	0.069	0.078	0.092	0.1	0.115	0.12	0.153
					RPM	239	191	152	119	95	76	60
	FEED		99	119	112	119	110	110	110			
	3-4		0.75D	0.25D	Vc	25	25	25	25	25	25	30
					fz	0.071	0.077	0.091	0.1	0.119	0.113	0.139
					RPM	199	159	126	99	80	64	60
	FEED		85	98	92	99	95	86	100			
	5		0.75D	0.25D	Vc	20	20	20	20	20	20	20
					fz	0.071	0.078	0.09	0.094	0.117	0.108	0.135
					RPM	159	127	101	80	64	51	40
FEED	68	79	73	75	74	66	64					
6	0.75D	0.25D	Vc	30	30	30	30	30	30	30		
			fz	0.069	0.078	0.092	0.1	0.115	0.12	0.153		
			RPM	239	191	152	119	95	76	60		
FEED	99	119	112	119	110	110	110					
7	0.75D	0.25D	Vc	25	25	25	25	25	25	30		
			fz	0.071	0.077	0.091	0.1	0.119	0.113	0.139		
			RPM	199	159	126	99	80	64	60		
FEED	85	98	92	99	95	86	100					
8	0.75D	0.25D	Vc	20	20	20	20	20	20	20		
			fz	0.071	0.078	0.09	0.094	0.117	0.108	0.135		
			RPM	159	127	101	80	64	51	40		
FEED	68	79	73	75	74	66	64					
9	0.75D	0.25D	Vc	10	10	10	10	10	10	10		
			fz	0.073	0.08	0.1	0.1	0.117	0.146	0.146		
			RPM	80	64	51	40	32	25	20		
FEED	35	41	40	40	37	45	35					
10	0.75D	0.25D	Vc	30	30	30	30	30	30	30		
			fz	0.069	0.078	0.092	0.1	0.115	0.12	0.153		
			RPM	239	191	152	119	95	76	60		
FEED	99	119	112	119	110	110	110					
11.1	0.75D	0.25D	Vc	20	20	20	20	20	20	20		
			fz	0.071	0.078	0.09	0.094	0.117	0.108	0.135		
			RPM	159	127	101	80	64	51	40		
FEED	68	79	73	75	74	66	64					



RECOMMENDED CUTTING CONDITIONS
EMPFOHLENE SCHNEIDPARAMETER

E2498 SERIES

4 FLUTE CORNER ROUNDING CUTTERS

Vc = m/min.
fz = mm/tooth
RPM = rev./min.
FEED = mm/min.

ISO	VDI 3323	Material Description	Parameter	Diameter (Ø)												
				8.0	9.0	10.0	11.0	12.0	14.0	16.0	20.0	24.0	28.0	34.0	48.0	
P	1	Non-alloy steel	Vc	20	20	20	20	20	20	20	20	20	20	20	20	20
			fz	0.017	0.022	0.02	0.021	0.021	0.025	0.029	0.032	0.038	0.042	0.049	0.058	
			RPM	796	707	637	579	531	455	398	318	265	227	187	133	
	FEED		54	62	51	49	45	45	46	41	40	38	37	31		
	Vc		15	15	15	15	15	15	15	15	15	15	15	15	15	
	fz		0.015	0.016	0.016	0.019	0.019	0.023	0.029	0.033	0.039	0.04	0.048	0.053		
	RPM	597	531	477	434	398	341	298	239	199	171	140	99			
	FEED	36	34	31	33	30	31	35	32	31	27	27	21			
	2	Non-alloy steel	Vc	10	10	10	10	10	10	10	10	10	10	10	10	
			fz	0.018	0.023	0.02	0.024	0.024	0.023	0.03	0.034	0.04	0.05	0.048	0.05	
			RPM	398	354	318	289	265	227	199	159	133	114	94	66	
	FEED		29	33	25	28	25	21	24	22	21	23	18	13		
3-4	Non-alloy steel		Vc	15	15	15	15	15	15	15	15	15	15	15	15	
			fz	0.015	0.016	0.016	0.019	0.019	0.023	0.029	0.033	0.039	0.04	0.048	0.053	
		RPM	597	531	477	434	398	341	298	239	199	171	140	99		
FEED		36	34	31	33	30	31	35	32	31	27	27	21			
6		Low alloy steel	Vc	10	10	10	10	10	10	10	10	10	10	10	10	
			fz	0.018	0.023	0.02	0.024	0.024	0.023	0.03	0.034	0.04	0.05	0.048	0.05	
	RPM		398	354	318	289	265	227	199	159	133	114	94	66		
FEED	29		33	25	28	25	21	24	22	21	23	18	13			
7-8	Low alloy steel		Vc	15	15	15	15	15	15	15	15	15	15	15	15	
			fz	0.015	0.016	0.016	0.019	0.019	0.023	0.029	0.033	0.039	0.04	0.048	0.053	
		RPM	597	531	477	434	398	341	298	239	199	171	140	99		
FEED		36	34	31	33	30	31	35	32	31	27	27	21			
10		High alloyed steel, and tool steel	Vc	10	10	10	10	10	10	10	10	10	10	10	10	
			fz	0.018	0.023	0.02	0.024	0.024	0.023	0.03	0.034	0.04	0.05	0.048	0.05	
	RPM		398	354	318	289	265	227	199	159	133	114	94	66		
FEED	29		33	25	28	25	21	24	22	21	23	18	13			
11.1	High alloyed steel, and tool steel		Vc	15	15	15	15	15	15	15	15	15	15	15	15	
			fz	0.015	0.016	0.016	0.019	0.019	0.023	0.029	0.033	0.039	0.04	0.048	0.053	
		RPM	597	531	477	434	398	341	298	239	199	171	140	99		
FEED		36	34	31	33	30	31	35	32	31	27	27	21			
N		21~25	Aluminum-wrought alloy, Aluminum-cast, alloyed	Vc	90	80	90	85	90	90	80	90	90	85	85	90
				fz	0.018	0.021	0.02	0.023	0.022	0.025	0.031	0.034	0.038	0.045	0.05	0.058
	RPM			3581	2829	2865	2460	2387	2046	1592	1432	1194	966	796	597	
FEED	258			238	229	226	210	205	197	195	181	174	159	138		

HIGH QUALITY PRODUCTS and ON TIME DELIVERY for WORLD-WIDE CUSTOMERS

Since 1982, YG-1 has been committed to quality, innovation and the unique customer experience.

Our performance and experience have granted YG-1 the global impression of one of the leading manufacturers of high quality cutting tool solutions. This global footprint expands over 75 countries, with international logistic centers, pledging to our customers to give the best service available today - and tomorrow.

EUROPE

 BELGIUM	 FINLAND	 ITALY	 PORTUGAL	 SLOVENIA	 THE NETHERLANDS
 CROATIA	 FRANCE	 LITHUANIA	 ROMANIA	 SPAIN	 TURKEY
 CZECH REPUBLIC	 GERMANY	 NORWAY	 RUSSIA	 SWEDEN	 UNITED KINGDOM
 DENMARK	 HUNGARY	 POLAND	 SERBIA	 SWITZERLAND	

ASIA PACIFIC

 AUSTRALIA	 INDONESIA	 MALAYSIA	 SINGAPORE	 UNITED ARAB EMIRATES
 CHINA	 ISRAEL	 PAKISTAN	 SOUTH KOREA	 VIETNAM
 HONG KONG	 JAPAN	 PHILIPPINES	 TAIWAN	
 INDIA	 KINGDOM OF SAUDI ARABIA		 THAILAND	

AMERICAS

 BRAZIL	 CANADA	 COLOMBIA	 MEXICO	 UNITED STATES
--	--	--	--	---

AFRICA

 EGYPT	 SOUTH AFRICA
---	--

 **YG-1 CO., LTD.**

* For the more information on sales network, please contact the head office as below;

YG-1 HEAD OFFICE 211, Sewolcheon-ro, Bupyeong-gu, Incheon, South Korea
Phone : +82-32-526-0909 e-mail : yg1@yg1.kr www.yg1.kr



HEAD OFFICE

211, Sewolcheon-ro, Bupyeong-gu, Incheon, South Korea

Phone: +82-32-526-0909

Http://www.yg1.kr E-mail: yg1@yg1.kr

Note The information is provided for reference only. Tool specifications are subject to change without prior notice.
Although we endeavor to supply accurate and timely information, there can be no guarantee to cover every particular application.
YG-1 or publishers are not liable for any damage for use of the information.



Search 'YG-1' on social media outlets